

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:


Contractor:

G2CR09/19/39X 1/4 Turn Angle Stop – Compression x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.

Design Features:

- **One-piece shut-off mechanism** provides smooth on-off operation
- **Positive 1/4 turn** shut off
- **Corrosion-resistant handle** is plated in an attractive chrome finish
- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Easy-to-remove handle** with screw attachment helps protect against accidental operation during rough-ins
- **100% leak** tested
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems (parts containing PXX only)

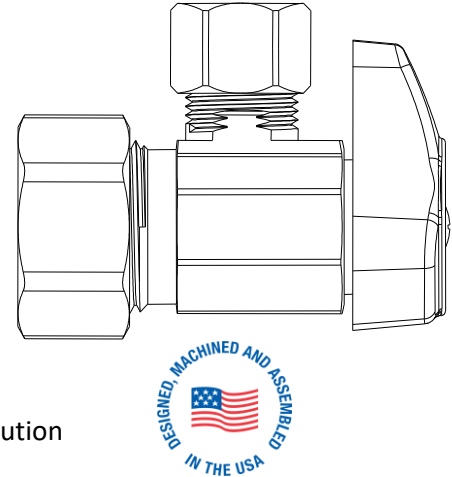

Operating Specifications:

Temperature: 40°- 160° F

Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Stem Barrel	TPE
Stem Shaft	Engineered polymer
O-ring	Rubber
Handle	ABS, plated or zinc die cast, plated
Handle Screw	Steel, zinc plated
Compression Nut	Brass, plated
Compression Sleeve	Brass
PEX Insert*	Stainless steel

*Where specified

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.50 G2CR09/19/39X 1/4 Turn Angle Stop – Comp x Comp REV 9.19


BrassCraft®

©2019 Brasscraft Manufacturing Company

G2CR09/19/39X 1/4 Turn Angle Stop – Compression x Compression

Part Listing:

<input type="checkbox"/>	G2CR09X C	1/2" nom compression x 1/4" OD compression, chrome plated
<input type="checkbox"/>	G2CR09X C1	1/2" nom compression x 1/4" OD compression, chrome plated, window tray
<input type="checkbox"/>	G2CR09X CD	1/2" nom compression x 1/4" OD compression, chrome plated, blister card
<input type="checkbox"/>	G2CR09X R	1/2" nom compression x 1/4" OD compression, rough brass
<input type="checkbox"/>	G2CR19X C	1/2" nom compression x 3/8" OD compression, chrome plated
<input type="checkbox"/>	G2CR19X C1	1/2" nom compression x 3/8" OD compression, chrome plated, window tray
<input type="checkbox"/>	G2CR19X CD	1/2" nom compression x 3/8" OD compression, chrome plated, blister card
<input type="checkbox"/>	G2CR19X R	1/2" nom compression x 3/8" OD compression, rough brass
<input type="checkbox"/>	G2CR19PXX C	1/2" nom compression w/ PEX stainless steel insert x 3/8" OD compression, chrome plated
<input type="checkbox"/>	G2CR19L1X CB	1/2" nom compression x 3/8" OD compression, less outlet nut, chrome plated, bulk
<input type="checkbox"/>	G2CR39X CD	1/2" nom compression x 1/2" OD compression, chrome plated, blister card

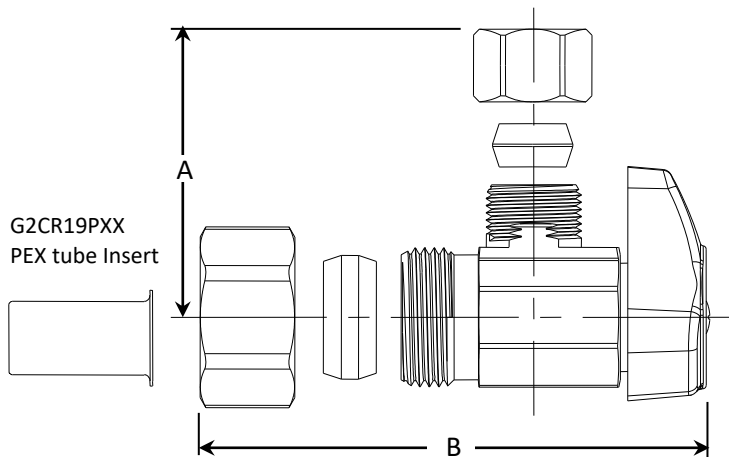

PART DIMENSIONS (Inches)		
Model	DIM A	DIM B
G2CR09X	1.02	2.16
G2CR19X	1.02	2.16
G2CR19L1X	.74	2.16
G2CR19PXX	1.02	2.16
G2CR39X	1.11	2.16

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.50 G2CR09/19/39X 1/4 Turn Angle Stop – Comp x Comp REV 9.19

BrassCraft

©2019 Brasscraft Manufacturing Company