

For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

R1B/09/19/39X Multi-Turn Angle Stop – Sweat x Compression

Use: For use with potable water systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stops

Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Oval knurled handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** with screw attachment protects accidental stop operation during rough-ins
- ✓

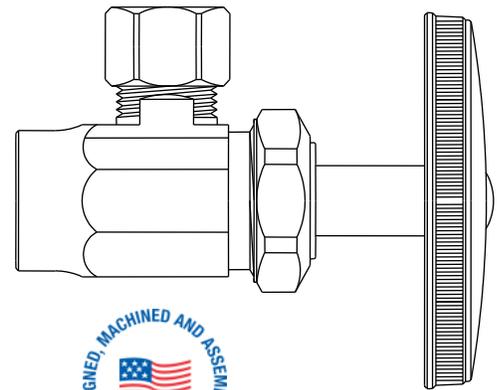

Operating Specifications:

Temperature: 40° - 140° F
Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS	
Body	Brass or brass, plated
Stem	Brass; or brass, plated
Bib & Packing Washers	Rubber
Packing Nut	Brass or brass, plated
Handle	Metal or metal, plated
Handle Screw	Steel, plated
Compression Sleeve	Brass
Compression Nut	Brass or brass, plated
Loose Key	Zinc die cast
Lock Shield	Brass, plated
Loose Key Stem	Brass or brass, plated

Part Listing:


- R1BX C 3/8" nom sweat x 3/8" OD compression, chrome
- R09X C 1/2" nom sweat x 1/4" OD compression, chrome
- R09X C1 1/2" nom sweat x 1/4" OD compression, chrome, window tray
- R09X CBT 1/2" nom sweat x 1/4" OD compression, chrome, plain tray, bulk
- R09X R 1/2" nom sweat x 1/4" OD compression, rough brass
- R09X R1 1/2" nom sweat x 1/4" OD compression, rough brass, window tray
- R19X C 1/2" nom sweat x 3/8" OD compression, chrome
- R19X C1 1/2" nom sweat x 3/8" OD compression, chrome, window tray
- R19X CBT 1/2" nom sweat x 3/8" OD compression, chrome, plain tray, bulk

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.



R1B/09/19/39X

Multi-Turn Angle Stop – Sweat x Compression

- R19X CD 1/2" nom sweat x 3/8" OD compression, chrome, carded
- R19X CH 1/2" nom sweat x 3/8" OD compression, chrome
- R19X R 1/2" nom sweat x 3/8" OD compression, rough brass
- R19X R1 1/2" nom sweat x 3/8" OD compression, rough brass, window tray
- R19X RBT 1/2" nom sweat x 3/8" OD compression, rough brass, plain tray, bulk
- R39X C 1/2" nom sweat x 1/2" OD compression, chrome
- R39X C1 1/2" nom sweat x 1/2" OD compression, chrome, window tray
- R39X R 1/2" nom sweat x 1/2" OD compression, rough brass
- SR19X C 1/2" nom sweat x 3/8" OD compression, loose key, chrome
- SR1BX C 3/8" nom sweat x 3/8" OD compression, loose key, chrome
- SR19X R 1/2" nom sweat x 3/8" OD compression, loose key, rough brass
- SR39X C 1/2" nom sweat x 1/2" OD compression, loose key, chrome
- XR19X C 1/2" nom sweat x 3/8" OD compression, cross handle, chrome

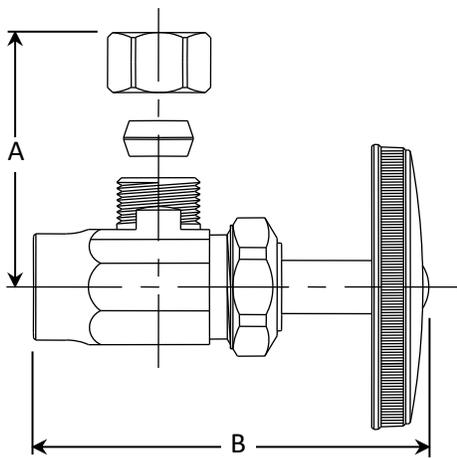

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
R1BX	1.02	2.56
R09X	1.02	2.50
R19X	1.02	2.50
R39X	1.15	2.50
SR1BX	1.02	2.35
SR19X	1.02	2.29
SR39X	1.15	2.29
XR19X	1.02	2.50

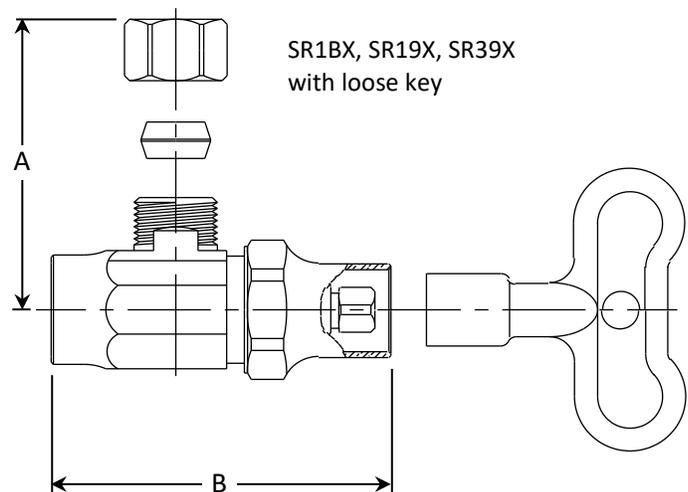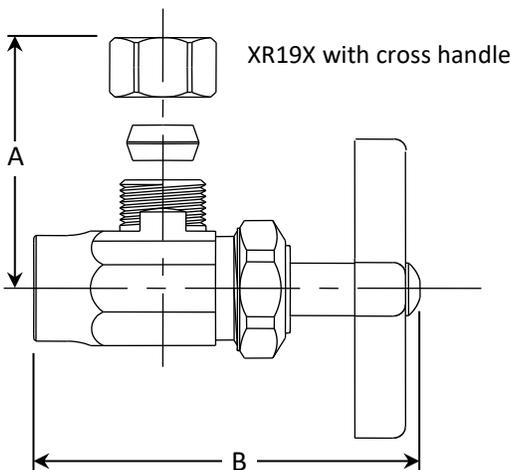

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI372 & NSF61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®