

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

G23345X 1/4 Turn Straight Stop – Compression x Slip-Joint

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.


Design Features:

- **One-piece shut-off mechanism** provides smooth on-off operation
- **Positive 1/4 turn shut-off**
- **Corrosion-resistant handle** is plated in an attractive chrome finish
- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Easy-to-remove handle** with screw attachment helps protect against accidental operation during rough-ins
- **100% leak tested**

**Operating Specifications:**


Temperature: 40° - 160° F

Pressure: 125 PSI maximum

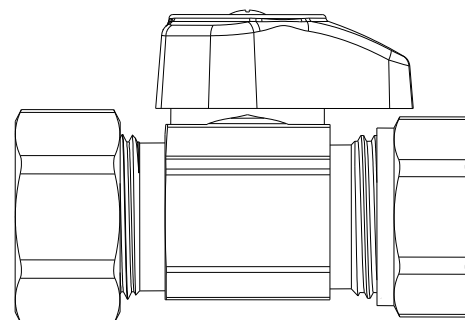

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Stem Barrel	TPE
Stem Shaft	Engineered polymer
Stem O-ring	Rubber
Handle	ABS, plated or zinc die cast, plated
Screw	Steel, zinc plated
Nuts	Brass, plated
Slip-joint Washer	Rubber
Friction Rings	Brass
Compression Sleeve	Brass

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
G23345X	1.02	2.04

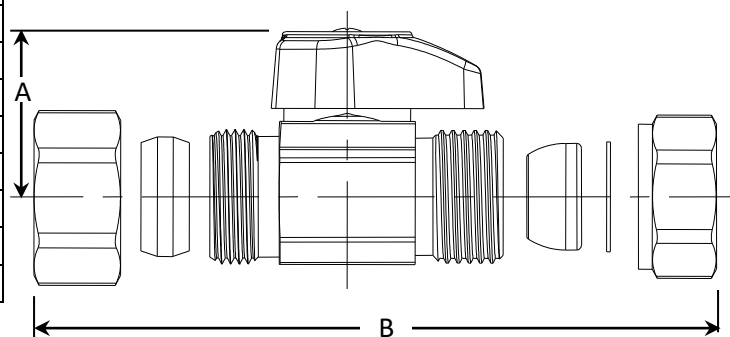**Part Listing:**

- ☐ G23345X C 1/2" nom compression x 7/16" & 1/2" slip-joint, chrome plated
- ☐ G23345X CD 1/2" nom compression x 7/16" & 1/2" slip-joint, chrome plated, carded

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.52 G23345X 1/4 Turn Straight Stop – Comp x Slip-Joint REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company