

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

G2R07/15/17/37X 1/4 Turn Angle Stop – Female Iron Pipe x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.

Design Features:

- **One-piece shut-off mechanism** provides smooth on-off operation
- **Positive 1/4 turn shut-off**
- **Corrosion-resistant handle** is plated in an attractive chrome finish
- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Easy-to-remove handle** with screw attachment helps protect against accidental operation during rough-ins
- **100% leak tested**





Operating Specifications:

Temperature: 40° - 160° F

Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS

Body	Brass
Stem Barrel	TPE
Stem Shaft	Glass-filled polypropylene
Stem O-ring	Rubber
Handle	ABS, plated or zinc die cast, plated
Screw	Steel, zinc plated
Compression Sleeve	Brass
Compression Nut	Brass, plated

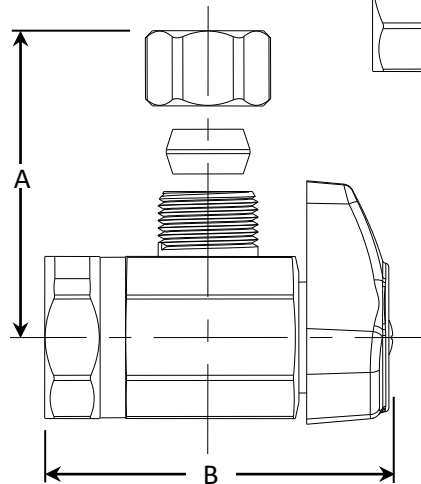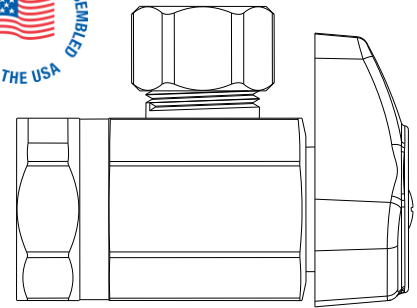

PART DIMENSIONS (Inches)

Model	DIM. A	DIM. B
G2R15X	1.09	2.12
G2R07X	1.09	1.95
G2R17X	1.09	1.95
G2R37X	1.18	1.95

Part Listing:

- | | | |
|--------------------------|-----------|--|
| <input type="checkbox"/> | G2R15X CD | 3/8" FIP x 3/8" OD compression, chrome plated, carded |
| <input type="checkbox"/> | G2R15X C1 | 3/8" FIP x 3/8" OD compression, chrome plated, window tray |
| <input type="checkbox"/> | G2R07X C | 1/2" FIP x 1/4" OD compression, chrome plated |
| <input type="checkbox"/> | G2R07X CD | 1/2" FIP x 1/4" OD compression, chrome plated, carded |
| <input type="checkbox"/> | G2R07X C1 | 1/2" FIP x 1/4" OD compression, chrome plated, window tray |
| <input type="checkbox"/> | G2R17X C | 1/2" FIP x 3/8" OD compression, chrome plated |
| <input type="checkbox"/> | G2R17X CD | 1/2" FIP x 3/8" OD compression, chrome plated, carded |
| <input type="checkbox"/> | G2R17X C1 | 1/2" FIP x 3/8" OD compression, chrome plated, window tray |
| <input type="checkbox"/> | G2R37X CD | 1/2" FIP x 1/2" OD compression, chrome plated, carded |

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.58 G2R15/07/17/37X 1/4 Turn Angle Stop – FIP x Comp REV 3.20

BrassCraft®

©2020 Brasscraft Manufacturing Company