

For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

SR10/ SR12/ SR32 & SSR10/ SSR12/ SSR30 Multi-Turn Straight Stop w/ Loose Key – Female Iron Pipe x Compression

Use: For use in potable water distribution systems. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use BrassCraft KT series ball stops

Design Features:

- **Machined one-piece brass body** provides strength, durability and long-lasting performance
- **Large loose key handle** provides a secure grip for trouble-free on/off operation
- **Removable loose key handle** helps protect against accidental stop operation during rough-ins and general use
- **Compliant Stops** available for California and Vermont “low-lead” requirements.

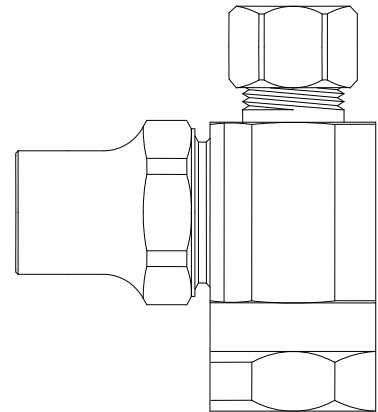

Operating Specifications:

Temperature: 40° - 140° F

Pressure: 125 psi maximum



Standard

MATERIAL SPECIFICATIONS	
Valve Body	C36000 brass
Lockshield Stem	C36000 brass
Bib & Packing Washers	Nitrile or EPDM rubber
Packing Nut	C36000 brass
Loose Key	Zinc die cast
Compression Sleeve	C36000 brass
Compression Nut	C36000 brass

Compliant

MATERIAL SPECIFICATIONS	
Valve Body	Compliant brass
Lockshield Stem	Compliant brass
Bib & Packing Washers	Nitrile or EPDM rubber
Packing Nut	Compliant brass
Loose Key	Zinc die cast
Compression Sleeve	C36000 brass
Compression Nut	C36000 brass

Standard Part Listing:

<input type="checkbox"/>	SR10 C	3/8" F.I.P. x 3/8" OD Compression with loose key handle, chrome plated
<input type="checkbox"/>	SR10 R	3/8" F.I.P. x 3/8" OD Compression with loose key handle, rough brass
<input type="checkbox"/>	SR12 C	1/2" F.I.P. x 3/8" OD Compression with loose key handle, chrome plated
<input type="checkbox"/>	SR12 R	1/2" F.I.P. x 3/8" OD Compression with loose key handle, rough brass
<input type="checkbox"/>	SR32 C	1/2" F.I.P. x 1/2" OD Compression with loose key handle, chrome plated
<input type="checkbox"/>	SSR10 C	3/8" F.I.P. x 3/8" OD Compression with screwdriver slot, chrome plated
<input type="checkbox"/>	SSR30 C	3/8" F.I.P. x 1/2" OD Compression with screwdriver slot, chrome plated
<input type="checkbox"/>	SSR12 C	1/2" F.I.P. x 3/8" OD Compression with screwdriver slot, chrome plated


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®


SR10/ SR12/ SR32 & SSR10/ SSR12/ SSR30 Multi-Turn Straight Stop w/ Loose Key – Female Iron Pipe x Compression

Compliant Part Listing:

- ☐ SR12X C 1/2" F.I.P. x 3/8" OD Compression with loose key handle, chrome plated

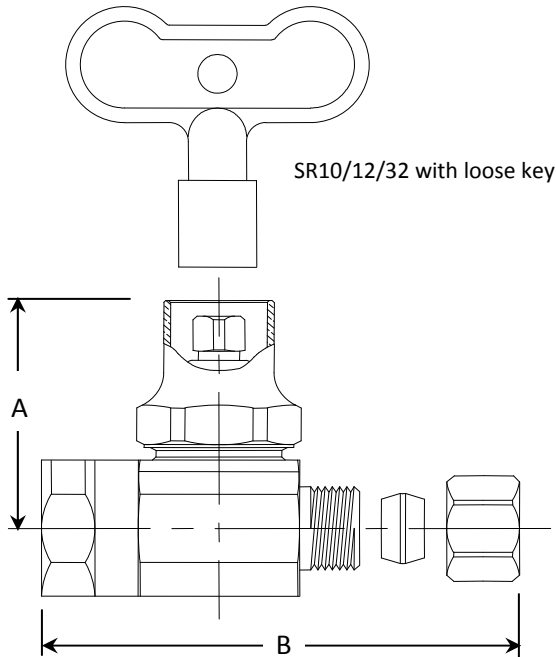

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
SR10	1.61	2.00
SR12	1.52	2.09
SR32	1.52	2.16
SSR10	1.61	2.00
SSR30	1.52	2.16
SSR12	1.52	2.09

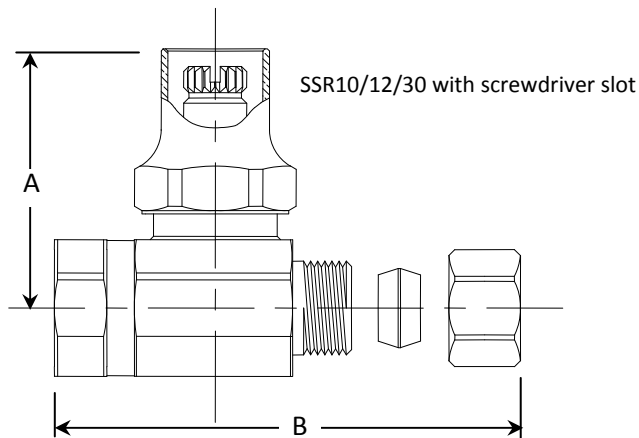

Listings & Certifications:

- IAPMO listed to ASME A112.18.1-05 / CSA B125.1-05 (File # 0645)
- CSA listed to ASME A112.18.1-05 / CSA B125.1-05 (File # 204593)
- Compliant product CSA approved to California Health and Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®