



Tyrrell™ | K-6676

21" x 27-1/8" floor-mount siphon-jet flushing rim service sink

Features

- Large basin allows placement of more volume
- 2-1/2" trapway larger than most residential toilet trapways
- Rim holes provide a uniform cascade of water to keep sides of sink clean
- Blow-out action flushing rim
- 1-1/2" (38 mm) top spud
- Sink requires 5 - 7 gpf (19 - 27 lpf) valve, and minimum running pressure of 25 psi (172 kPa)
- Siphon jet provides a powerful surge of water to effectively eliminate maximum debris or waste



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

0 White



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-22-2026 11:3 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.2/CSA B45.1

Technical Information

Number of Deck Holes:	1
Drain Hole Diameter:	2-5/8" (67 mm)
Basin Configuration:	Single Bowl

Material

- Crafted of Grade A vitreous china to provide a durable, nonporous product with a glossy finish
- Vitreous china

Recommended Products/Accessories


K-8935 Stainless steel rim guard for front rim installation on Camerton™ sink, 11"

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



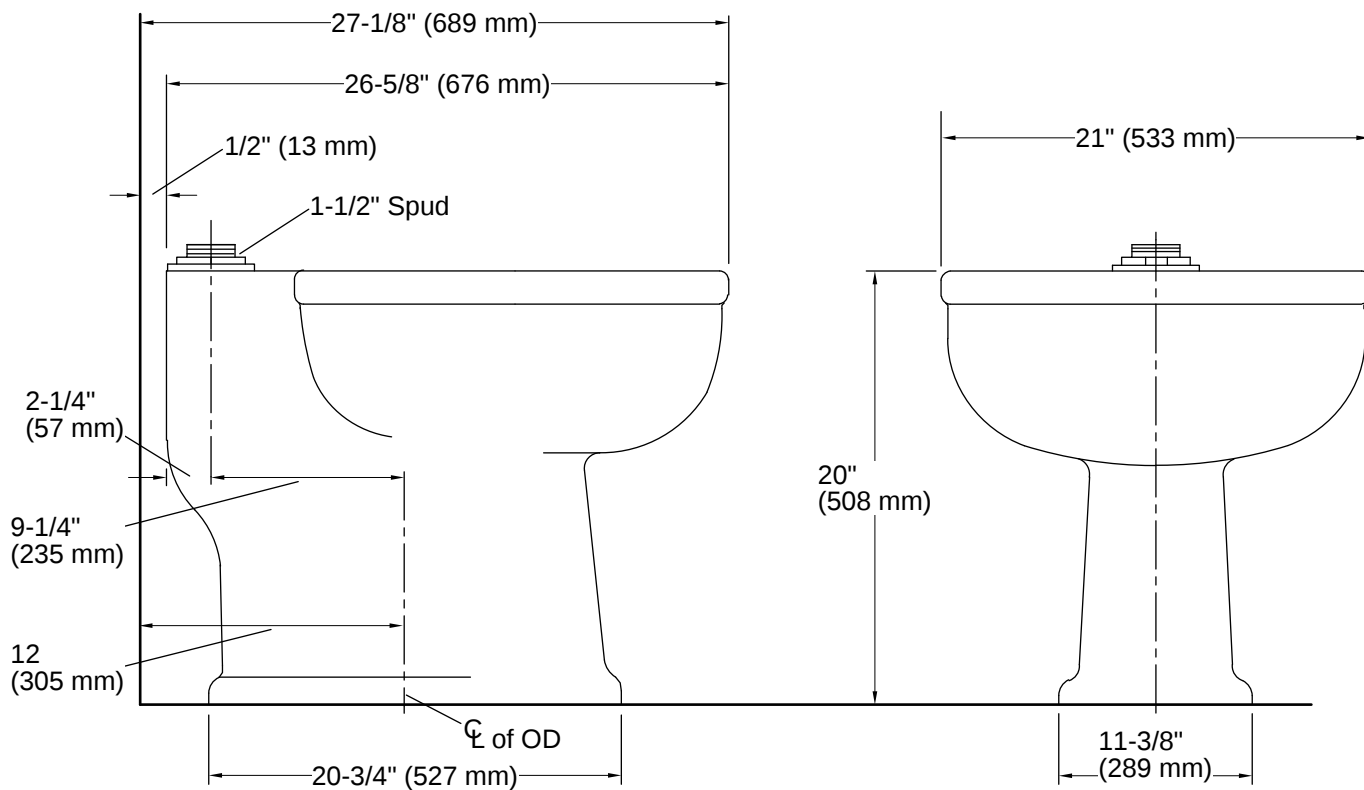

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

