



Z5615.258.00.00.00

1.28 GPF Elongated Wall Hung EcoVantage®
Manual Flush Valve Toilet System

TAG _____



Z5615 HET Series

- Zurn One HET Toilet System designed for optimal performance between Zurn fixture and Zurn flush valve to save water.
- 1.28 gpf (gallons per flush) 4.8 Lpf
- 20% water savings over standard 1.6 gpf system
- Vitreous china
- Elongated front rim
- 2-1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Zurn product system component compatibility and quality assurance
- Shipping Weight: 40 lbs.

Z5615 Series

Suffix Options:

- RF Retro-Fit Nut Kit for extending carrier studs from existing wall.

Recommended Trim:

- Z5955SS-EL Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.

Note: To ensure system performance:
Minimum Running Water Pressure = 25 psi



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

These dimensions and specifications are subject to change without notice.
Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.
Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed per code.



- Engineering Specification: Z5615.258.00.00.00 EcoVantage® High Efficiency Toilet System**
-System comes complete with exposed manual Z6000AV-HET high efficiency flushometer valve and vitreous china wall-hung toilet. The system is designed to perform to industry standards with as little as 1.28 gallons per flush. The EcoVantage® manual valve is an exposed, quiet diaphragm type that is complete with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant filtered by-pass. The valve has a non-hold open and no leak handle feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon guard protection. Internal seals are made of chloramine resistant materials. Vitreous china toilet is 1-1/2" top spud with 2-1/8" fully glazed trapway and siphon jet action. Valve and toilet are an engineered system designed to provide optimal performance and 20% water savings over 1.6 gpf conventional toilets.

See Zurn One Systems for suggested packages.

Architectural/Engineering Approval

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292






Z5615.258.00.00.00

1.28 GPF Elongated Wall Hung EcoVantage®
Manual Flush Valve Toilet System

TAG _____

Rough-in dimensions for Z5615 Series

- Z5615.258.00.00.00 with top spud

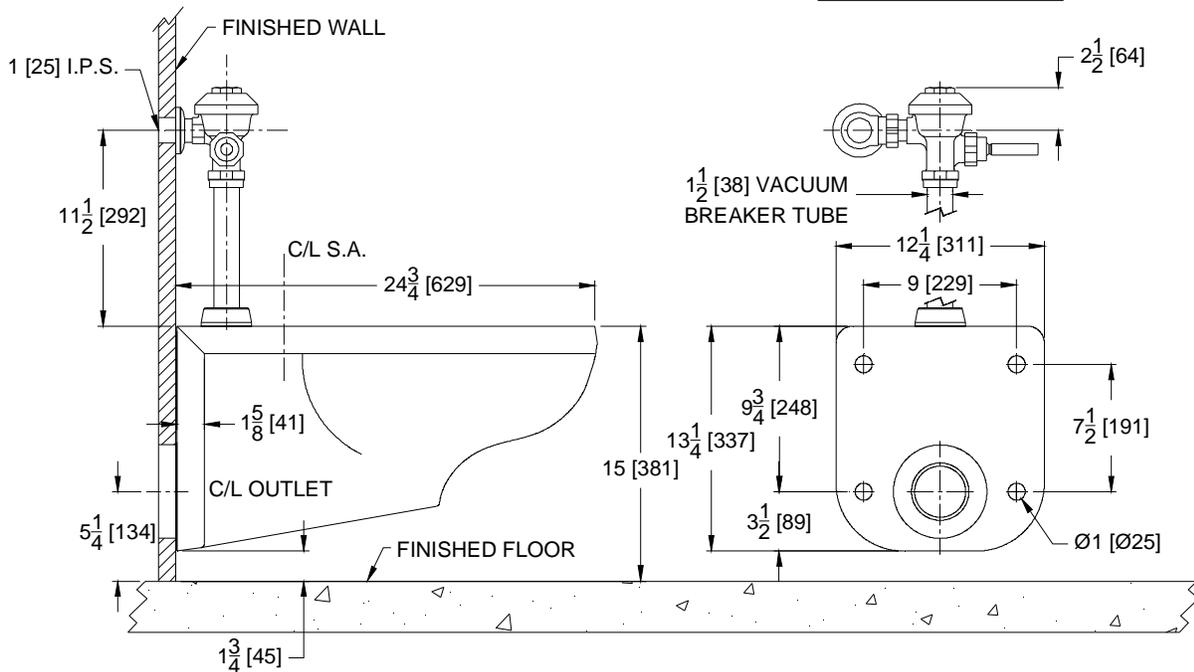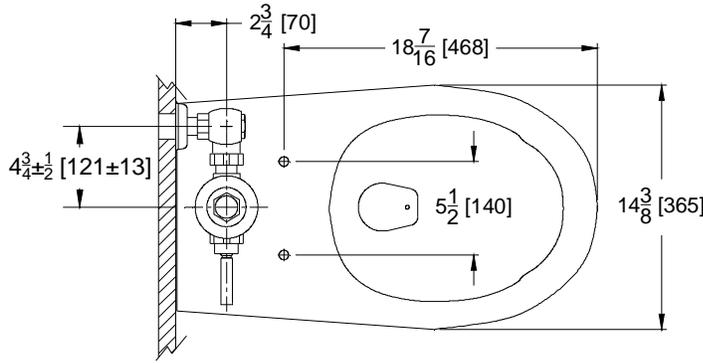

These dimensions and specifications are subject to change without notice.
 Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.
 Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed per code.



Note: For ADA compliance, top of seat height should be installed at 17"-19" from finished floor.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292