




2" DZR Brass Plug QQP_DZX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

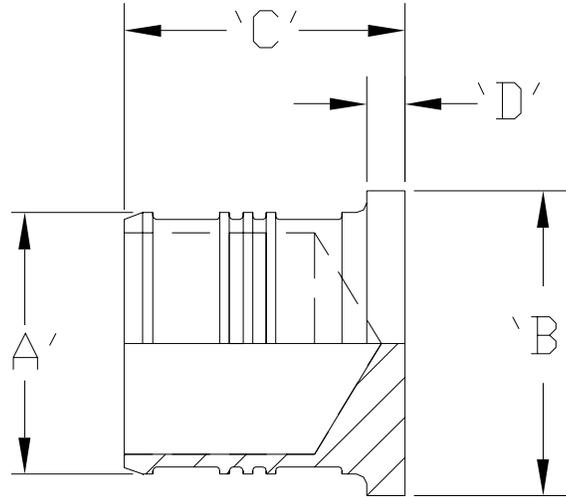

Part Number	Description	'A'	'B'	'C'	'D'
QQP8DZX	2" Barb Plug	1.602" [40.7]	1.68" [42.7]	1.87" [47.5]	0.37" [9.4]

Engineering Specification: ZurnPEX® 2" DZR brass plug. The QQP_DZX allows for pressure testing of the system. Large diameter fittings are made with dezincification resistant brass. These fittings, as a system with ZurnPEX® tubing, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5.

Accessories

___ **QCR8X** 2" Copper Crimp Ring


Rev.	Date: 11/14/08	C.N. No. 99383
Dwg. No. 84023		Prod. No. QQP_DZX



2" DZR Brass Female Sweat X PEX Adapter QQ__DZX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

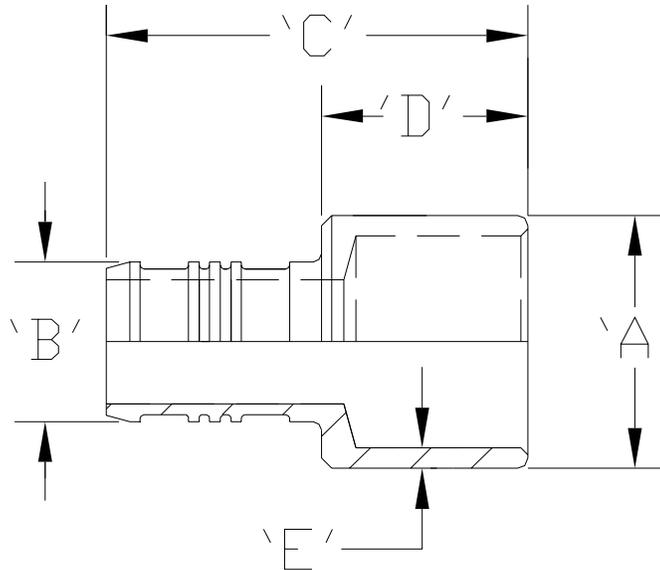

Part Number	Description	'A'	'B'	'C'	'D'	'E'
QQ1050DZX	2" Female Sweat x 2" PEX Barb	2.37" [60.2]	1.602" [40.7]	2.97" [75.4]	1.47" [37.3]	0.12" [3.0]

Engineering Specification: ZurnPEX® 2" DZR brass female sweat x ZurnPEX® adapter. The QQ__DZX adapter solders directly to copper tubing. The outer diameter of the QQ__X contains two grooves for easy identification. Large diameter fittings are made with dezincification resistant brass. These fittings, as a system with ZurnPEX® tubing, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5.

Accessories

__ QCR8X 2" Copper Crimp Ring


Rev.	Date: 11/14/08	C.N. No. 99384
Dwg. No. 84024	Prod. No. QQ__DZX	



2" DZR Brass Male Sweat X PEX Adapter QQ__DZX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

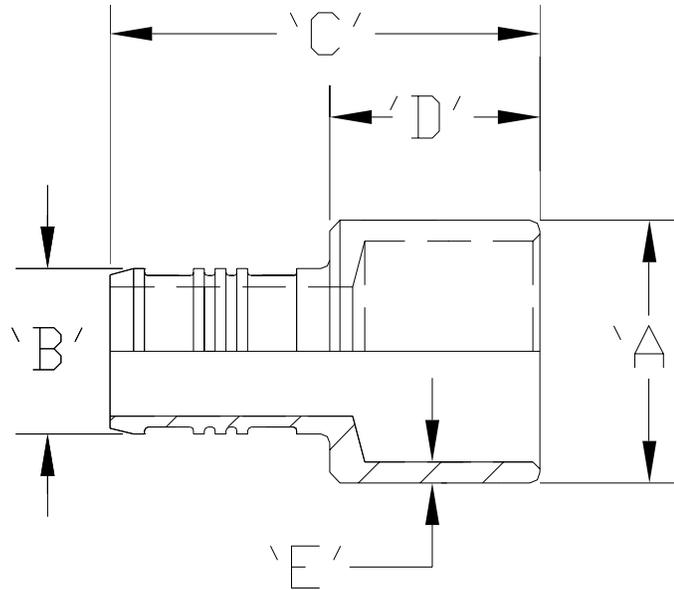

Part Number	Description	'A'	'B'	'C'	'D'	'E'
QQ905DZX	1-1/2" Male Sweat x 2" PEX Barb	1.62" [41.1]	1.602" [40.7]	3.03" [77.0]	1.16" [29.5]	0.10" [2.5]
QQ975DZX	2" Male Sweat x 2" PEX Barb	2.12" [53.9]	1.602" [40.7]	3.10" [78.7]	1.60" [40.6]	0.12" [3.0]

Engineering Specification: ZurnPEX® 2" DZR brass male sweat x ZurnPEX® adapters. The QQ__DZX adapter is made to fit inside a wrought copper fitting. Large diameter fittings are made with dezincification resistant brass. These fittings, as a system with ZurnPEX® tubing, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5.

Accessories

___ **QCR8X** 2" Copper Crimp Ring


Rev.	Date: 11/14/08	C.N. No.99385
Dwg. No. 84025	Prod. No. QQ__DZX	



2" DZR Brass MPT x PEX Adapter QQMC__DZX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

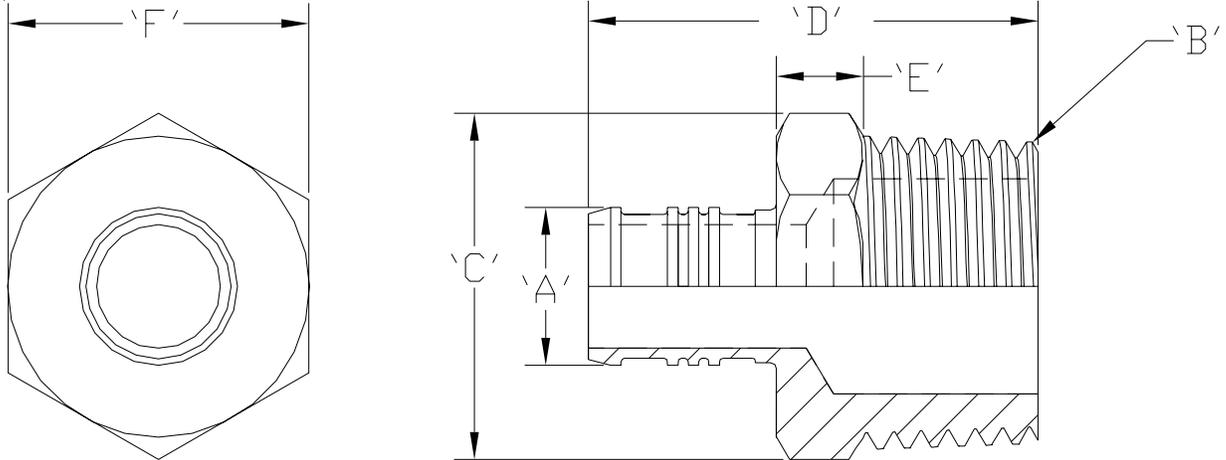

Part Number	Description	'A'	'B'	'C'	'D'	'E'	'F'
QQMC88DZX	2" Barb x 2" MPT Adapter	1.602" [40.7]	2" NPT	2.82" [71.6]	3.06" [77.7]	0.50" [12.7]	2.44" [62.0]

Engineering Specification: ZurnPEX® 2" DZR brass MPT adapter. The QQMC__DZX is used transition from female pipe thread to PEX tubing. Large diameter fittings are made with dezincification resistant brass. These fittings, as a system with ZurnPEX® tubing, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5.

Accessories

___ **QCR8X** 2" Copper Crimp Ring

Rev.	Date: 11/14/08	C.N. No. 99386
Dwg. No. 84026	Prod. No. QQMC__DZX	