




QickSert CR™ Barb Female Thread Swivel Adapter QQPSFC__X

Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

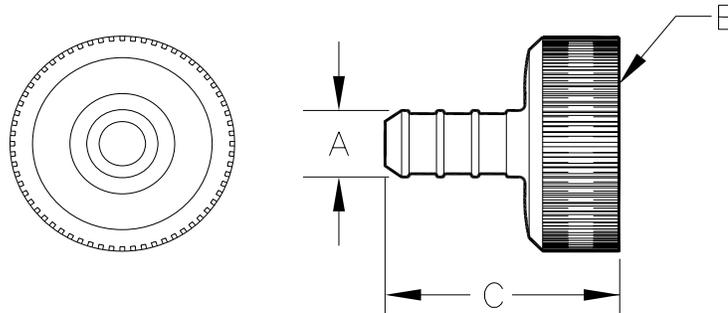

Part Number	Description	'A' in [mm]	'B' in [mm]	'C' in [mm]
QQPSFC45X	3/4" Barb x 1" Female Swivel Adapter	0.668" [17.0]	1" - 14	1.35" [34.3]
QQPSFC55X	1" Barb x 1" Female Swivel Adapter	0.856" [21.7]	1" - 14	1.50" [38.1]

Engineering Specification: ZurnPEX® QickSert CR™ Barb x female thread swivel adapter. The QQPSFC__X adapter is used to transition from PEX to the 1" male pipe threads of the ZurnPEX® QickPort® manifolds. Barb molded from Acudel®. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5, and ASTM F2159.

Accessories

- ___ **QCLP4X** 3/4" QickClamp™ Crimp Ring
- ___ **QCLP5X** 1" QickClamp™ Crimp Ring
- ___ **QCR4X** 3/4" Copper Crimp Ring
- ___ **QCR5X** 1" Copper Crimp Ring

Rev.	Date: 08/26/09	C.N. No. 110128
Dwg. No. 84323		Prod. No. QQPSFC__X