

AQUASPEC FAUCETS

MODELS - G61754, G62682, G67800, G67874,
G68018



METERING CARTRIDGES

TECHNICAL INFORMATION

MAXIMUM PRESSURE: 125 PSI

MAXIMUM TEMPERATURE: 180°F


IMPORTANT THE WATER SUPPLY LINES MUST BE THOROUGHLY FLUSHED BEFORE INSTALLATION TO PREVENT FOREIGN MATTER AND DEBRIS FROM CLOGGING AND/OR DAMAGING INTERNAL COMPONENTS AND THEREBY PREVENTING THE FAUCET FROM FUNCTIONING PROPERLY

IMPORTANT THE FILTER ASSEMBLY INCLUDED WITH THIS FAUCET MUST BE INSTALLED AS INSTRUCTED TO FURTHER PREVENT FOREIGN MATTER AND DEBRIS FROM DAMAGING THE FAUCET AND TO ENSURE PROPER FUNCTIONING.

INSTALLATION INSTRUCTIONS

1. REMOVE HANDLE NUT ASSEMBLY(#1) USING 1 1/8" HEX 6 POINT SOCKET.
2. DISCARD CAP SEALING WASHER ASSEMBLY(#2)
3. ENSURE O-RING(#3A) AND WASHER(#3B) ARE POSITIONED ON BLUE POLYMER SLEEVE AS SHOWN.
4. INSERT METERING CARTRIDGE(#3) INTO FAUCET BODY.
5. RE-INSTALL HANDLE NUT ASSEMBLY(#1) USING 1 1/8" HEX 6 POINT SOCKET. TIGHTEN UNTIL SEAL IS ACHIEVED UNDER HANDLE NUT . IT MAY BE NECESSARY TO REMOVE WASHER(#3B) FROM METERING CARTRIDGE TO ACHIEVE SEAL.
6. CYCLE TIME ADJUSTMENT
TURN ADJ. NUT UP (CCW) FOR SHORTER CYCLE
TURN ADJ. NUT DOWN (CW) FOR LONGER CYCLE

NOTE: G62682 FUNCTIONS
AS ON/OFF VALVE AND IS
NOT SLOW CLOSING

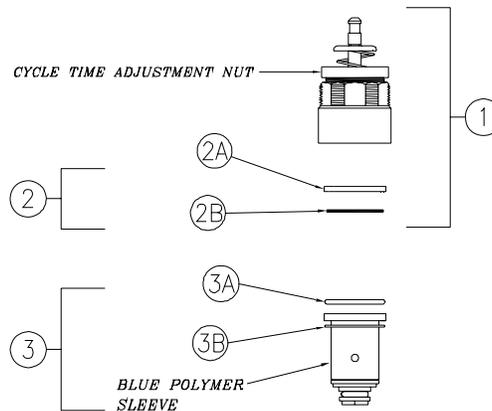

G60561, G65503, G61754
PICTURED

PARTS LIST

ITEM	QTY	ITEM	QTY		
1	G60561	HANDLE NUT ASSEMBLY	1		
2	G65503	CAP SEALING WASHER ASS.	1		
2A	65431002	PLASTIC WASHER	1		
2B	65432001	PLASTIC WASHER	1		
3	G61754	METERING CARTRIDGE	1		
		3A	58155020	O-RING	1
		3B	81241001	WASHER	1

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292