

ProPEX® Lead-free (LF) Brass to PE Coupling, 1" PEX x 1" PE

Submittal Information

Revision A: Jan. 20, 2010

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data


Material: C69300 Brass

Product Information and Application Use

The ProPEX® Lead-free Brass to Polyethylene (PE) Coupling transitions PE pipe to Uponor AquaPEX® tubing.¹

Approved for use in hot and cold domestic potable water systems and radiant heating systems, these couplings are also safe for direct burial in soil.

Note: This product does not include the crimp ring for the PE side of the coupling.

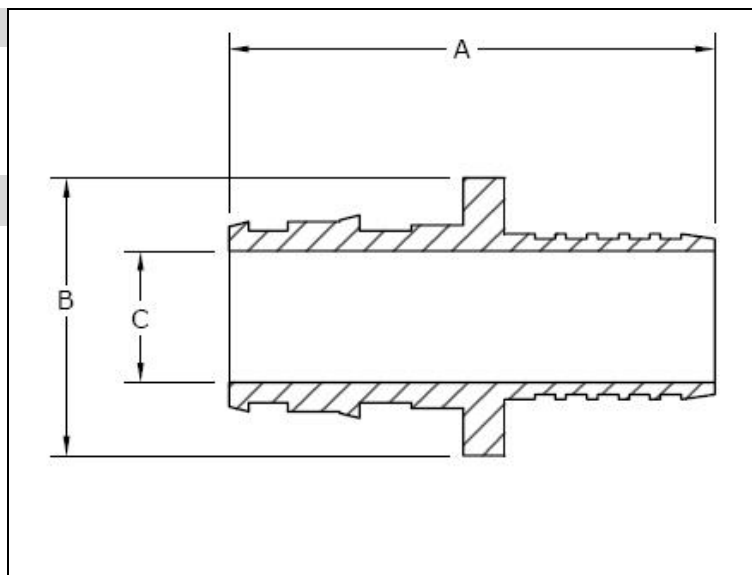

✓ Description	Part Number	A	B	C	Weight
ProPEX LF Brass to PE Coupling, 1" PEX x 1" PE	LF4591010	2.490"	1.350"	0.818"	0.20 lbs.

Installation

Use the appropriate ProPEX Ring (sold separately) for connecting PEX tubing. Use crimp ring to secure the PE tubing to the fitting. Refer to the AquaPEX Professional Plumbing Installation Guide or the Radiant Floor Heating Installation Handbook for additional information.

Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

Codes

UPC; NSPC; NPC of Canada

Listings

ANSI/NSF 14- and 61-certified; SBCCI (PST & ESI Report No. 9661); ICBO ER 5142; U.P. Code, Annex G

Related Applications

PEX-a Plumbing Systems
Radiant Heating and Cooling Systems
Snow and Ice Melting Systems
Permafrost Protection Systems
Turf Conditioning Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.