

Model

ST-2033-1.6

Vitreous China Rear Spud Water Closet

DESCRIPTION

Complete vitreous china rear spud ADA compliant water

Flush Cycle

Model ST-2033-1.6 (1.6 gpf/6.0 Lpf)



SPECIFICATIONS

Water Closet


- · Vitreous china
- · ADA compliant
- Floor mounted
- · Siphon jet flushing action
- 1 1/2" I.P.S. rear spud inlet
- · 2" trapway diameter
- · Fully glazed trapway
- · Toilet seat not included
- · Integral flushing rim
- Elongated bowl
- Water spot area 9 1/2" x 7 3/8"
- · Closet bolts and caps included
- Water closet compliant to the applicable sections of ASME A112.19.2/CSA B45.1


Colors/Finishes

White

Recommended Accessories

 Compatible with toilet seat models: Olsonite 10CT Bemis 1955 CT Church Commercial 295CT






Product Specification

Elongated water closet shall be made of vitreous china with a 1 1/2" rear spud. Water Closet shall use 1.6 gpf/6.0 Lpf. Water Closet shall be floor mounted. Water Closet shall be ADA compliant. Water Closet shall be Sloan Model ST-2033-1.6.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.



NOTE: Plumbing System Requirements √ Minimum Flowing Pressure: 25 PSI √ Minimum Flow Rate: 18 GPM

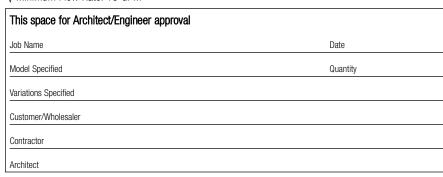





certificates to meet 100% of the company's purchased electricity use at its Franklin Park, Illinois facility.

SLOAN

Sloan Valve Company 10500 Seymour Avenue Franklin Park, IL 60131

Phone: 1-800-9-VALVE-9 (982-5839)

or 1-847-671-4300

Fax: 1-800-447-8329 or 1-847-671-4380

www.sloanvalve.com

Copyright © 2009 Sloan Valve Company 12/09 Rev. 0b