

# STUB OUT ELBOW - F1960

▶▶ 630WG SERIES

PowerPEX®

## SPECIFICATION

Sioux Chief 630 series stub out elbows shall be used where necessary in hot and cold water supply systems. Elbows shall be formed from Type L copper tubing with a spun-closed end and provide full flow to valve or fixture. Solder joint to brass inlet fitting shall be lead-free. Elbow inlet connections shall conform to ASTM F1960 fitting end specifications.

## MATERIALS

**Elbow:** Type L copper tube  
**Optional Mounting Bracket:** copper-plated steel  
**Inlet Fitting:** Brass<sup>1</sup>

## INSTALLATION NOTES


Do Not expose the PEX tube/joint to heat in excess of 180° F. Excessive heat will damage the joint, resulting in leaks. Pressure test all joints before use.

## DIMENSIONS

Model:	248(E)	2412	2138	348(E)	4612(E)
<b>A:</b> Inlet	1/2"	1/2"	1/2"	3/4"	1"
<b>B:</b> Height (Leg)	4"	4"	12-3/4"	5"	7-1/2"
<b>C:</b> Length	8"	12"	8"	8"	12"
<b>D:</b> Tube OD	0.625"	0.625"	0.625"	0.875"	1.125"
<b>E:</b> Leg-to-bracket	1-3/4"	n/a	n/a	2"	2"
<b>F:</b> Radius	1-1/4"	1-1/4"	1-1/4"	1-3/4"	2"

<sup>1</sup> Material is C69300. Brass is dezincification and SCC resistant, and is compliant with NSF-61 Annex G and California No Lead Plumbing Law

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

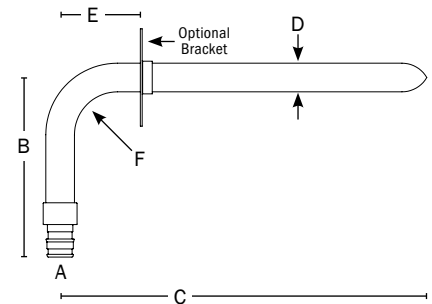

### Create Item Number

## 630WGA

e.g. **630WG248E:** 1/2" F1960 PEX, 4" x 8" stub out elbow with bracket

### STUB OUT ELBOW A

- 248** = 1/2" F1960 PEX, 4" x 8" stub out elbow
- 248E** = 1/2" F1960 PEX, 4" x 8" stub out elbow with bracket
- 2412** = 1/2" F1960 PEX, 4" x 12" stub out elbow
- 2138** = 1/2" F1960 PEX, 12-3/4" x 8" stub out elbow

- 348** = 3/4" F1960 PEX, 5" x 8" stub out elbow
- 348E** = 3/4" F1960 PEX, 5" x 8" stub out elbow with bracket
- 4612** = 1" F1960 PEX, 7-1/2" x 12" stub out elbow
- 4612E** = 1" F1960 PEX, 7-1/2" x 12" stub out elbow with bracket