



Direct Drive Blower Motors

5 1/2 inch dia. MARS SERIES 112



Direct Drive Furnace Blower Motors

MARS direct drive furnace blower motors are three speed standard efficiency models. All models are electrically reversible and include 2 1/4 inch resilient rings for base mounting. These models have all angle sleeve bearings and have open air over enclosures. All MARS Brand Motors feature Rheem shell mounting holes.

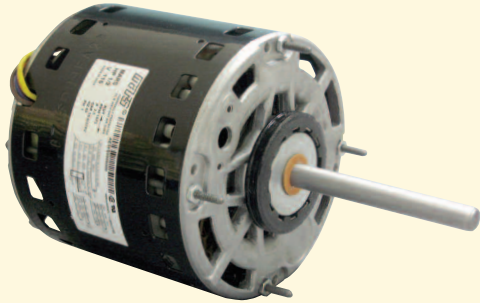


Features:

- All angle sleeve bearings
- 3 speeds
- 1/2 inch extended thru bolts
- 2 1/4 inch resilient rings
- Reversible rotation
- 4 inch long, 1/2 inch diameter shaft
- For accessories see pages M-112 to M-114

Specifications:

- Single phase, 60 Hertz
- Overload protection
- Fan duty, continuous, air over
- Open construction
- 26 inch leads
- Class B insulation



Cross Reference

MARS #	GE	AO Smith	Emerson	Fasco	Marathon	Wagner	Packard	YORK Source 1	Rheem/Ruud Prostock	Carrier/Totaline RCD	Nordyne Partner's Choice
10583	3583	DL1026	1863	D721	X000	WG840583	43583	S1-FHM3583	51-24435-83	P257-8583	01-0169
10584	3584	D1026	1971	D725	X001	WG840584	43584	S1-FHM3584	51-24435-84	P257-8584	01-0173
10585	3585	DL1036	1864	D727	X002	WG840585	43585	S1-FHM3585	51-24435-85	P257-8585	01-0170
10586	3586	D1036	1972	D923	X003	WG840586	43586	S1-FHM3586	51-24435-86	P257-8586	01-0174
10587	3587	DL1056	1865	D701	X004	WG840587	43587	S1-FHM3587	51-24435-87	P257-8587	01-0171
10588	3588	D1056	1973	D703	X005	WG840588	43588	S1-FHM3588	51-24435-88	P257-8588	01-0175
10589	3589	DL1076	8904	D728	X009	WG840589	43589	S1-FHM3589	51-24435-89	P257-8589	01-0172
10590	3590	D1076	8905	D729	X010	WG840590	43590	S1-FHM3590	51-24435-90	P257-8590	01-0176

1075 RPM - Three Speed

MARS NO.	HP	ROT	Voltage	Amps	Cap Required	Encl.	Brg.	DIMENSIONS			Lead Lengths
								A	B	C	
10583	1/4	Rev	115	4.2	5/370	OAO	Slv	4.00	4.89	1/2	26"
10584	1/4	Rev	208-230	1.8	5/370	OAO	Slv	4.00	4.89	1/2	26"
10585	1/3	Rev	115	6.1	5/370	OAO	Slv	4.00	5.14	1/2	30"
10586	1/3	Rev	208-230	2.7	5/370	OAO	Slv	4.00	5.14	1/2	26"
10587	1/2	Rev	115	7.5	10/370	OAO	Slv	4.00	5.89	1/2	29.33"
10588	1/2	Rev	208-230	3.2	7.5/370	OAO	Slv	4.00	5.64	1/2	29"
10589	3/4	Rev	115	11.2	15/370	OAO	Slv	4.00	6.14	1/2	30.25"
10590	3/4	Rev	208-230	4.5	10/370	OAO	Slv	4.00	6.14	1/2	30.25"