

**Feature**


- 600# WOG
- DZR lead free brass body
- Full port
- Dual EzPress ends
- Chrome plated ball
- PTFE seats
- Blow-out proof stem
- Adjustable packing
- MSS-SP-110
- AB1953, NSF/ANSI 61 & 372 certified
  
- Meet BAA requirement



Pressure/ Temperature rating	
Valve body and stem	
600 psi from 15 °F to 160 °F	150 psi max. at 366 °F
Press connections	
250 psi from 15 °F to 160 °F	150 psi max. at 250 °F

**Material**

	Part	Material	Specification
1	Body	DZR Lead Free Brass	ASTM B927 C27453
2	End piece	DZR Lead Free Brass	ASTM B927 C27453
3	Ball	Lead Free Brass / Cr plated	ASTM B927 C28500
4	Seat	PTFE	PTFE
5	Stem	Lead Free Brass	ASTM B927 C28500
6	Packing ring	PTFE	PTFE
7	Packing nut	Brass	ASTM B124 C37700
8	Handle	Steel / Geomet® plated	ASTM A36
9	Nut	Steel / Zn plated	ASTM A36
10	Valve info	-	-
11	O-ring	EPDM Perox	NSF approved

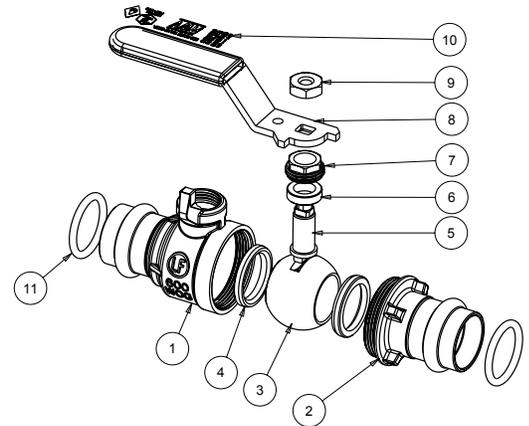

**Dimension, Cv, Weight**

Size	A [in]	L [in]	H [in]	D [in]	P [in]	C [in]	Cv	Wt. [lb]
1/2"	2.93	3.60	2.13	0.64	0.59	0.86	15	0.48
3/4"	3.54	3.60	2.26	0.89	0.79	0.98	30	0.70
1"	3.90	4.98	2.58	1.14	0.98	1.06	60	1.26
1 1/4"	4.29	4.98	2.82	1.39	1.26	1.06	110	1.64
1 1/2"	5.24	5.57	3.29	1.64	1.57	1.26	130	2.54
2"	6.18	5.57	3.58	2.14	1.97	1.46	360	3.74

