



Quietflex[®]

YOUR
FLEX DUCT

SOLUTIONS PROVIDER

PRODUCT CATALOG

QUANTITY is
PRIORITY at **Quietflex**[®]
& **customer service** is **standard**
with all of our **flex duct** products

Johns Manville Formaldehyde-Free[™] Fiberglass Insulation

Oversized Core to Fit on Collars and Register Boxes

Children & Schools GREENGUARD[®] Indoor Air Quality Certified

Compressed Packaging in Bags or Boxes

Anti-Microbial Coated* Commercial & Acoustical Flex Available

(*On Certain Products, Inhibits the Growth of Bacterial Odors)

Color Coded Packaging in Correlation to
R-Value for Product Identification

Bar Coded Product Labels

10 Year Warranty

Available in R4.2, R6.0 and R8.0



AMGFlex[®] Duct

An indoor air quality system is not complete without AMGFlex Duct from Quietflex. In ductwork, conditions can exist for the growth and proliferation of indoor air contaminants. AMGFlex Duct continuously inhibits the growth of bacterial odors with an antimicrobial coating, Agion, on the inner core. Furthermore, AMGFlex uses Johns Manville Formaldehyde-free insulation, which helps reduce overall formaldehyde exposure and results in a healthier and safer home. For the ultimate in indoor air quality, be certain to install Quietflex AMGFlex Duct.

- Available in R6.0 and R8.0
- Agion Coated Inner Core Inhibits the Growth of Bacterial Odors
- Polyester Vapor Barrier and Heavy-Duty Rip-Stop Scrim Reinforcement

SERIES	R-VALUE	DIAMETER									
		4	5	6	7	8	9	10	12	14	16
86	6.0	•	•	•	•	•	•	•	•	•	•
88	8.0	•	•	•	•	•	•	•	•	•	•



HPDFlex[™] Duct (Commercial)

The HPDFlex Duct is able to satisfy the demands of high pressure HVAC applications by being rated for up to -2 inch negative and +16 inch W.C. positive static pressure. This high pressure duct has a resilient metallic, polyester-vapor barrier with a special "rip-stop" scrim reinforcement. It also uses Johns Manville Formaldehyde-free insulation, which helps reduce overall formaldehyde exposure. Furthermore, HPDFlex Duct continuously inhibits the growth of bacterial odors with an antimicrobial coating, Agion, on the inner core.

- Available in R4.2, R6.0 and R8.0
- -2" W.C. Negative and +16" W.C. Positive Pressure
- Agion Coated Inner Core Inhibits the Growth of Mold and Bacteria
- Polyester Vapor Barrier and Heavy-Duty Rip-Stop Scrim Reinforcement

SERIES	R-VALUE	DIAMETER									
		4	5	6	7	8	9	10	12	14	16
340	4.2	•	•	•	•	•	•	•	•	•	•
380	6.0	•	•	•	•	•	•	•	•	•	•
385	8.0	•	•	•	•	•	•	•	•	•	•



QAS Branded Acoustical Flex Duct

The QAS Acoustical Flex Duct reduces the overall sound transmitted through your flex duct system. Noise traveling in your duct wall, generated by your HVAC system, air flow, media rooms, and other sound sources is reduced. The key technology is the perforated inner core which allows the noise to be absorbed by the thermal insulation. In addition, QAS features Johns Manville Formaldehyde-free™ insulation which reduces the risk of formaldehyde exposure.

- Available in R6.0 and R8.0
- -1/2" W.C. Negative and +4" W.C. Positive Static Pressure
- 7' Collared Flex Available for Quicker Installation

SERIES	R-VALUE	DIAMETER											
		4	5	6	7	8	9	10	12	14	16	18	
105	4.2	•	•	•	•	•	•	•	•	•	•	•	•
120	6.0	•	•	•	•	•	•	•	•	•	•	•	•
125	8.0	•	•	•	•	•	•	•	•	•	•	•	•



Rip Stop Silver Jacket Flex Duct

The Rip Stop Silver Jacket Flex Duct has a metallic, polyester-vapor barrier with a special "rip-stop" scrim reinforcement. It also uses Johns Manville Formaldehyde-free™ insulation, which helps reduce overall formaldehyde exposure.

- Available in R4.2, R6.0 and R8.0
- Available in Bag or Boxed Packaging
- -1/2" W.C. Negative and +10" W.C. Positive Static Pressure

SERIES	R-VALUE	DIAMETER														
		3	4	5	6	7	8	9	10	12	14	16	18	20	22	
40	4.2		•	•	•	•	•	•	•	•	•	•	•	•	•	
80	6.0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
85	8.0	•	•	•	•	•	•	•	•	•	•	•	•	•		



UV-Inhibited Black Jacket

The UV-Inhibited Black Jacket Flex Duct has a UV-inhibited polyethylene vapor barrier.

- Available in R4.2, R6.0 and R8.0
- Available in Bag or Boxed Packaging
- Durable 2 mil Polyethylene Vapor Barrier
- -1/2" W.C. Negative and +10" W.C. Positive Static Pressure

SERIES	R-VALUE	DIAMETER												
		4	5	6	7	8	9	10	12	14	16	18	20	22
20	4.2	•	•	•	•	•	•	•	•	•	•	•	•	•
60	6.0	•	•	•	•	•	•	•	•	•	•	•	•	•
65	8.0	•	•	•	•	•	•	•	•	•	•	•	•	•




Manufactured Housing Flex Duct

The Mobile Home Flex Duct has an extra heavy-duty, UV-inhibited polyethylene vapor barrier and complies with HUD standards for outdoor use with mobile homes.

- Available in R4.2, R6.0 and R8.0
- Available in Bag Packaging
- Heavy Duty 4 mil Polyethylene Vapor Barrier
- -1/2" W.C. Negative and +10" W.C. Positive Static Pressure

SERIES	R-VALUE	DIAMETER								
		6	7	8	9	10	12	14	16	18
51	4.2	•		•		•	•	•	•	•
71	6.0	•		•		•	•	•	•	•
81	8.0	•	•	•	•	•	•	•	•	•

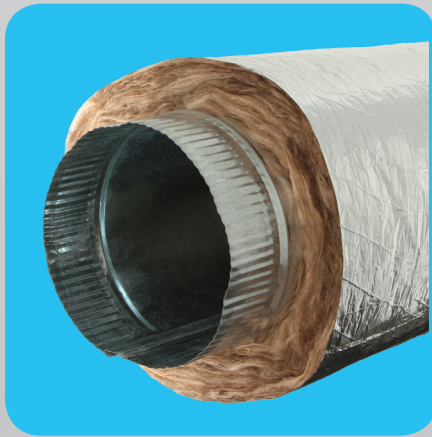

Insulated Sleeve

The Insulated Sleeve is ideal for use in insulating new or existing hard pipe. It increases the efficiency of warm or cool air traveling through the duct and reduces condensation build-up. The oversized diameter of the sleeve results in an easy slip-on installation.

- Available in R4.2, R6.0 and R8.0
- Available in Boxed Packaging
- Cut Lengths of 5' and 10'
- Available in Metallic Polyester-Vapor Barrier or Polyethylene Vapor Barrier
- One Starter Cap Included in Each Box

SILVER SLEEVE		DIAMETER									
SERIES	R-VALUE	4	5	6	7	8	9	10	12	14	16
SS42	4.2	•	•	•	•	•	•	•	•	•	•
SS60	6.0	•	•	•	•	•	•	•	•	•	•
SS80	8.0	•	•	•	•	•	•	•	•	•	•
BLACK SLEEVE											
BS42	4.2	•	•	•	•	•	•	•	•	•	•
BS60	6.0	•	•	•	•	•	•	•	•	•	•
BS80	8.0	•	•	•	•	•	•	•	•	•	•




6' and 7' Collared Silver Jacket Flex Duct

The silver jacket pre-collared product has a metallic, polyester-vapor barrier with "rip-stop" scrim reinforcement. It is constructed with a universal male/female collar that is factory attached at each end. This product comes pre-assembled and packaged 2 to a box.

- Available in R4.2, R6.0 and R8.0
- Available in 6' or 7' Lengths
- Pre-Assembled for Quicker Installation

6' COLLARED SILVER JACKET		DIAMETER										
SERIES	R-VALUE	4	5	6	7	8	9	10	12	14	16	18
30-6	4.2	•	•	•	•	•	•	•	•	•	•	•
70-6	6.0	•	•	•	•	•	•	•	•	•	•	•
84-6	8.0	•	•	•	•	•	•	•	•	•	•	•
7' COLLARED SILVER JACKET												
30-7	4.2	•	•	•	•	•	•	•	•	•	•	•
70-7	6.0	•	•	•	•	•	•	•	•	•	•	•
84-7	8.0	•	•	•	•	•	•	•	•	•	•	•

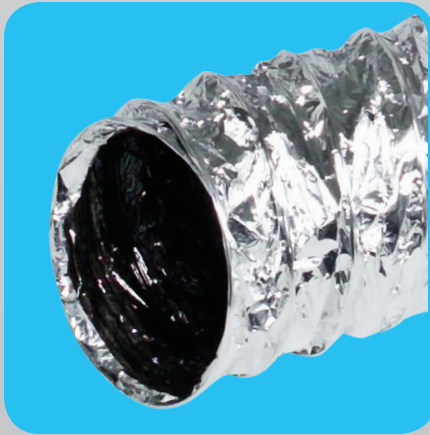

Uninsulated Connector

The Uninsulated Air Connector has an oversized core to fit on collars and register boxes for quicker installation.

- 3" and 4" Packaged Individually – 25 to a Master Carton
- 5" through 20" Packaged 4 to a Master Carton
- All Lengths of 25'

SERIES	DIAMETER												
	3	4	5	6	7	8	9	10	12	14	16	18	20
06	•	•	•	•	•	•	•	•	•	•	•	•	•



Dryer Vent

The Clothes Dryer Transition Duct is an easy to install boxed universal flexible dryer duct. The heavy duty 4-ply aluminum foil laminate construction makes this product fire resistant and meets all the requirements of UL 2158A.

- Fits Most Commonly Used Electric and Gas Dryers
- Fits in Tight Places Where Rigid Metal Ducting Will Not Work
- Close Wire Frame Spacing Allows Tight Bends Without Collapsing

BOXED LENGTHS	DIAMETERS
Feet	Inch
8	Nominal 4" (actual 4.125)
25	Each hose will be packaged individually and then placed in a master carton. 50 pieces for 8', 25 pieces for 25' and 10 pieces for 50'
50	



Quietflex Manufacturing Company, L.P.

4518 Brittmoores Road • Houston, Texas 77041

Phone 713.849.2163 • Fax 713.849.0753 • Toll Free 877.694.3669

www.quietflex.com

WARRANTY

Quietflex Manufacturing Company, L.P. warrants its products for ten (10) years against defects in material and workmanship, provided that no such product is installed in a location exposed to direct or indirect light or on the high-pressure side of variable air-volume (VAV) systems.

THIS WARRANTY IS EXCLUSIVE. IT IS PROVIDED IN LIEU OF ANY OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

As Quietflex's sole obligation, and the purchaser's exclusive remedy, for any defect covered by this warranty, Quietflex will replace any defective products. Quietflex will not be responsible for any labor charges or other costs of either deinstallation of any defective products or installation of any replacement products.

LIMITATION OF LIABILITY

QUIETFLEX MANUFACTURING COMPANY, L.P. SHALL IN NO EVENT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR RELATING TO ITS PRODUCTS, WHETHER FOR BREACH OF WARRANTY OR OTHER CONTRACT BREACH, NEGLIGENCE OR OTHER TORT, OR ON ANY STRICT LIABILITY THEORY.

Quietflex® is a registered trademark of Quietflex Manufacturing Company, L.P.

