

Speedrooter 92[®]

Job tested tough



Contractors know that the Speedrooter really can take a beating – from its frame braced at key stress points, to General's exclusive Flexicore[®] wire rope center cable that's so tough it carries a one year warranty.

The Speedrooter 92's field tested design offers easy handling. One person can easily load it onto a truck, as the machine slides smoothly from the loading wheel to the handle to the stair climbers and finally to the wheels. The adjustable height handle can be reset to be three inches longer or more compact, depending upon your preference.

With the driving and pulling power for long, tough jobs, General's Power Cable Feed easily handles 3/4" and 5/8" cables. To adjust to different cable sizes, simply turn

the knob on top of the feed. The screwdriver stays in the tool box.

The drum holds 100 feet of 3/4" or 5/8" Flexicore cable to clear 3" to 10" drain lines. The drum has a see-through inner cage, so you can quickly see how much cable is left in the drum.



Truck Loading Wheel

One person easily loads the Speedrooter 92 onto a truck. The swept-back handle and loading wheel give you the needed leverage.

General *General Wire Spring Co.*
PIPE CLEANERS McKees Rocks, PA 15136 USA
800-245-6200 or 412-771-6300
www.drainbrain.com



The toughest tools down the line.™

Speedrooter 92® Units

Complete and ready to operate

P-S92	Basic Unit: 1/2 hp Capacitor Motor, Power Cable Feed, Drum, Water-Proof Foot Switch, 20 ft. Power Cord w/GFI, Leather Gloves
P-S92-C	Basic Unit + 100 ft. x 3/4" (100EM5) cable and SRCS cutter set.
P-S92-E	Basic Unit + 100 ft. x 5/8" (100EM4) cable and SRCS cutter

Flexicore® Wire Rope Center Cables

Heavy gauge wire is coiled around 49 strand wire rope and then heat treated. This cable has unequalled strength and the right amount of flexibility. It's so tough it has a one year warranty against defect or breakage.


Senior Cutter Set – Catalog #SRCS

Cutter	Part Number	Application
 Spear Head	SHD	Starting Drill (Gets Water Flowing)
 3" and 4" Side Cutter Blades	3SCB 4SCB	For cutting and scraping
 2" U-Cutter	2UC	For cutting and scraping
 3" Heavy Duty Saw Blade	3HDB	For roots and other stoppages
 4" Rotary Saw Blades	4RSB	For roots and other stoppages
 Large Retrieving Tool	RTR-2	For removing loose objects and broken cable
 26" Flexible Leader	LE-3	Helps cable get around tight bends and traps



Guide tube

Guide tube reduces cable whipping and keeps your hands off the spinning cable. Tube is 30" long. Five foot extensions are available.

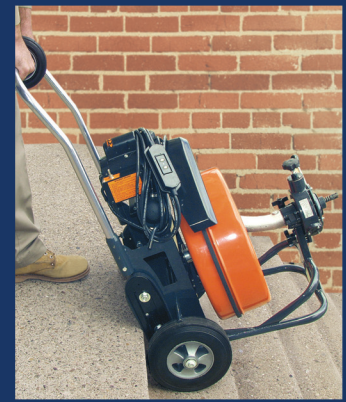

V-Belt Stair Climbers

V-belt stair climbers like the ones used to move heavy furniture and appliances let you take the Speedrooter 92 up a flight of stairs yourself.

Specifications:

Weight:

115 lbs. (52 kg) without cable.

Dimensions:

26" deep, 22" wide, 41" high (66 cm x 56 cm 104 cm).

Drum:

Holds 100 ft x 3/4" or 5/8" cable (30 m x 19 mm or 17 mm).

Drum Removal:

Loosen two knobs, remove bolt, and lift off.

Motor:

1/2 hp with capacitor, forward-off-reverse switch, 20 ft. power cord and ground fault circuit interrupter.

Foot Switch:

Pneumatic, with no electrical contact between pedal and motor.

Power Cable Feed

Drives and retracts at variable speed of up to 20 ft. per minute.

Wheels:

10" Heavy-duty wheels with roller bearings.

Stair Climbers:

Heavy-duty V-belts running on nylon rollers.

Wheel Brake:

Enables one person to lift machine onto bed of truck.

Truck Loading Wheel:

Enables one person to lift machine onto bed of truck.

Tool Box:

Attached to rear of machine. Holds all cutters except Flexible leader.

Leather Gloves:

With double-reinforced palm for hand protection when guiding cable.

Cables:

Left wound Flexicore® wire rope center 3/4" diameter for 4" to 10" lines and 3" lines without sharp bends; 5/8" diameter for 3" to 6" lines.

Cutters: Cutter Set for 5/8" and 3/4" cables (see left column).