

# Hardwire Converter with Battery Backup

TECK<sup>®</sup>  
COMMERCIAL



## HARDWIRE CONVERTER WITH BATTERY BACKUP

### Hardwire Converter with Battery Backup for Delta 6 VDC products listed below:

(To order as part of complete product from factory,  
add “-BB” suffix to the model number.)

#### FOR USE ON ELECTRONIC FAUCETS


590T, 591T, 590TP, 591TP, 600T, 620TP, 860T, 1500T3, 1500T4,  
3000TA, 590-HDF, 591-HDF 590-P, 591-P, 592-P-HDF SERIES

#### FOR USE ON ELECTRONIC VALVES

81T with Body Mounted Sensor  
81T-WMS with Wall Mounted Sensor  
1600T

#### 061047A

To convert installed product in field,  
order the 061047A kit pictured below.

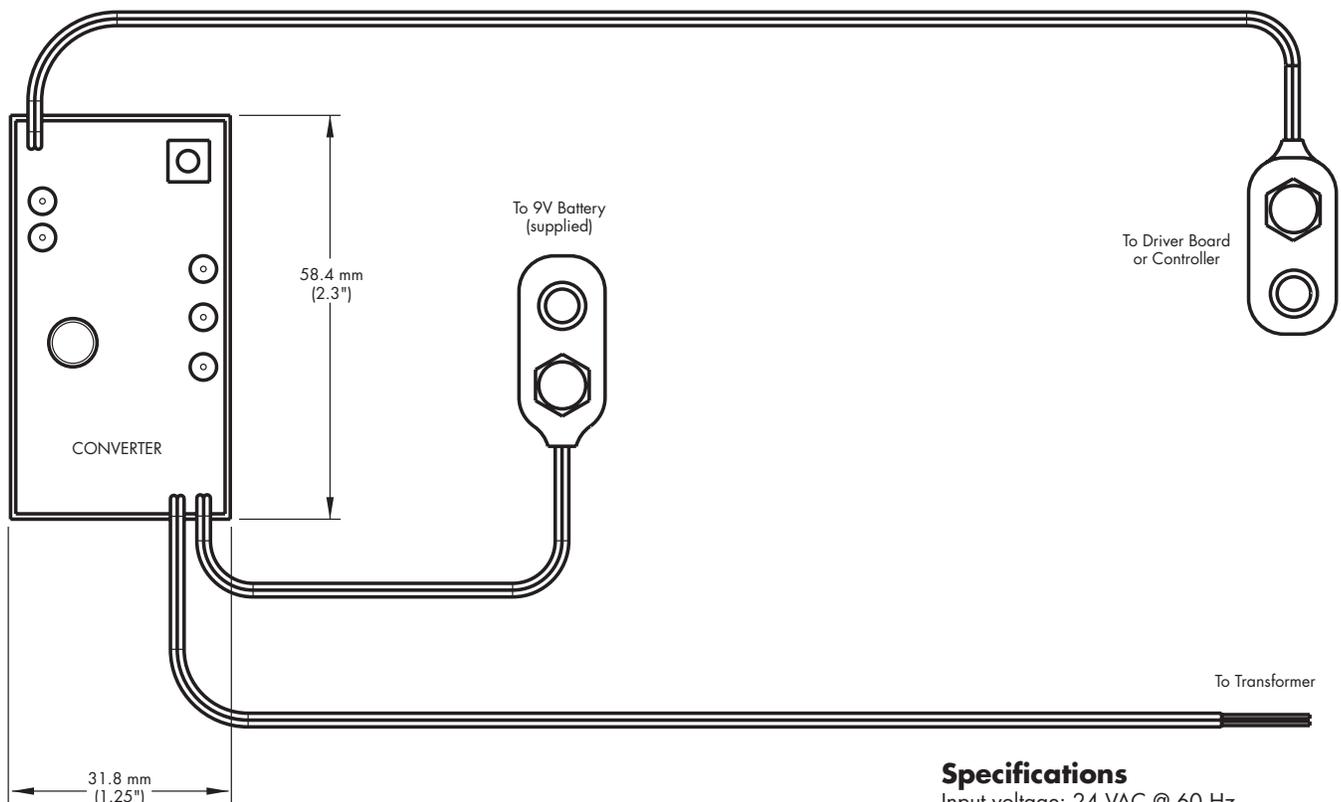

### Specifications

Input voltage: 24 VAC @ 60 Hz

Output voltage: 5 VDC  $\pm$  5%

Current Draw: 600 MA

Operating Temperature Range: -55°C to 85°C

Battery Backup: with 9V Battery

Note: Measurements may vary  $\pm$  6mm (0.25")

Refer to [www.specselect.com](http://www.specselect.com) for individual models.