




Zurn PEX® XL-Low Lead Brass Barb Elbow - QQE_GX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

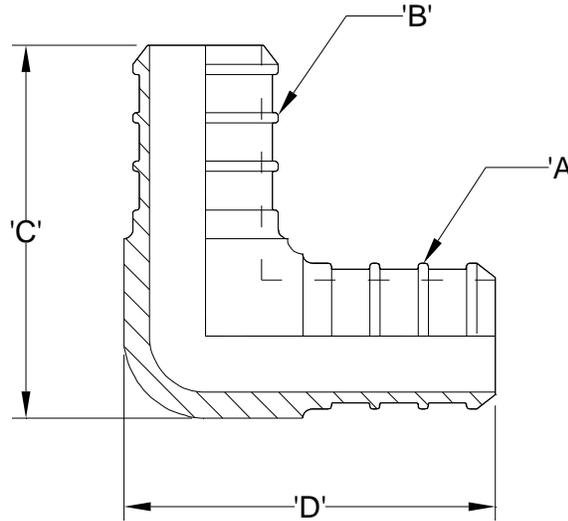

NOTE: Barb geometry will vary depending upon barb size.

Part Number	Description	'A'	'B'	'C'	'D'
QQE33GX	1/2" Barb x 1/2" Barb Elbow	1/2" Barb	1/2" Barb	1.21" [30.7]	1.20" [30.5]
QQE43GX	3/4" Barb x 1/2" Barb Elbow	3/4" Barb	1/2" Barb	1.44" [36.6]	1.20" [30.5]
QQE44GX	3/4" Barb x 3/4" Barb Elbow	3/4" Barb	3/4" Barb	1.44" [36.6]	1.43" [36.3]
QQE55GX	1" Barb x 1" Barb Elbow	1" Barb	1" Barb	1.86" [47.2]	1.82" [46.2]
QQE66GX	1-1/4" Barb x 1-1/4" Barb Elbow	1-1/4" Barb	1-1/4" Barb	2.46" [62.5]	2.46" [62.5]
QQE77GX	1-1/2" Barb x 1-1/2" Barb Elbow	1-1/2" Barb	1-1/2" Barb	2.68" [68.1]	2.68" [68.1]
QQE88GX	2" Barb x 2" Barb Elbow	2" Barb	2" Barb	3.44" [87.4]	3.44" [87.4]

Engineering Specification: Zurn PEX® XL-Low Lead Brass Barb Elbow. The QQE_GX is used to make sharp 90° bends. Manufactured from EcoBrass®, C69300. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, and ASTM F1807.

Accessories

- ___ QCLP3X 1/2" QuickClamp® Crimp Ring
- ___ QCLP4X 3/4" QuickClamp® Crimp Ring
- ___ QCLP5X 1" QuickClamp® Crimp Ring
- ___ QCR3X 1/2" Copper Crimp Ring
- ___ QCR4X 3/4" Copper Crimp Ring
- ___ QCR5X 1" Copper Crimp Ring
- ___ QCR6X 1-1/4" Copper Crimp Ring
- ___ QCR7X 1-1/2" Copper Crimp Ring
- ___ QCR8X 2" Copper Crimp Ring
- ___ QSOET3X 1/2" Stainless Steel Crimp Ring
- ___ QSOET4X 3/4" Stainless Steel Crimp Ring
- ___ QSOET5X 1" Stainless Steel Crimp Ring

Rev.	Date: 2/22/10	C.N. No. 110732
Dwg. No. 84486	Prod. No. QQE_GX	