




Zurn PEX® XL-Low Lead Brass Barb x Female Thread Swivel Adapter - QQSFC__GXP Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

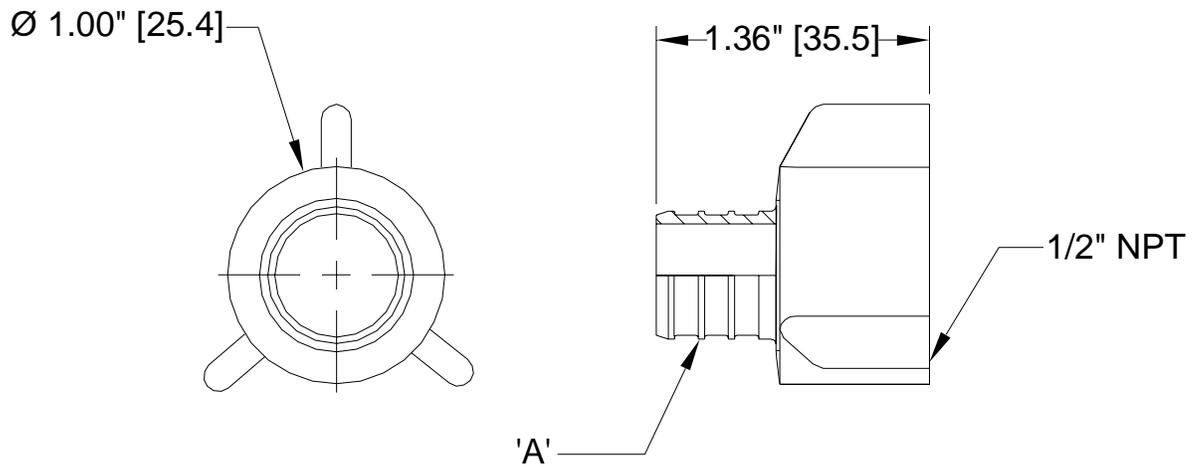

| Part Number | Description | 'A' |
|-------------|--|-----------|
| QQSFC23GXP | 3/8" Barb x 1/2" Female Swivel Adapter | 3/8" Barb |
| QQSFC33GXP | 1/2" Barb x 1/2" Female Swivel Adapter | 1/2" Barb |

Engineering Specification: Zurn PEX® XL-Low Lead Brass Barb x Female Thread Swivel Adapter. The QQSFC__GXP adapter is used to transition from PEX to male pipe threads, such as on QickPort® manifold outlets. Manufactured from EcoBrass®, C69300. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, and ASTM F1807.

Accessories

- ___ QCLP2X 3/8" QickClamp® Crimp Ring
- ___ QCLP3X 1/2" QickClamp® Crimp Ring
- ___ QCR2X 3/8" Copper Crimp Ring
- ___ QCR3X 1/2" Copper Crimp Ring
- ___ QSOET2X 3/8" Stainless Steel Crimp Ring
- ___ QSOET3X 1/2" Stainless Steel Crimp Ring

| | | |
|----------------|----------------------|-----------------|
| Rev. | Date: 2/22/10 | C.N. No. 110728 |
| Dwg. No. 84482 | Prod. No. QQSFC__GXP | |