


MODELS 761BN, 761RB, 761WHA VENTILATION FAN WITH DECORATIVE LIGHT



DESCRIPTION

LIGHT FIXTURE:

- Brushed Nickel finish with White Opal glass (761BN)
- Oil-Rubbed Bronze finish with Ivory Alabaster glass (761RB)
- White finish with White Alabaster glass (761WHA)
- Close mount design
- Uses two 60 Watt maximum, B10 type, candelabra bulbs or energy efficient equivalent. Bulbs not included.
- Vent opening in fixture base for exhaust fan
- Light fixture assembly is plug-in and removable

BLOWER:

- Plug-in permanently lubricated motor
- Polymeric blower wheel

HOUSING:

- Rugged, 26-gage galvanized steel construction
- 5-3/4" height allows for 2" x 6" ceiling installations
- Sturdy key-holed mounting brackets for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter

NOTE: For installation in flat ceilings only.

DO NOT install in a bathtub or shower enclosure.

U.L. Listed for use in insulated ceilings (Type I.C.)

Use supply wiring rated for at least 90° C

SPECIFICATIONS

VOLTS	AMPS	STATIC PRESSURE	CFM	SONES	DUCT
120	1.6	0.10	80	2.5	4" Round



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

TYPICAL SPECIFICATION

Ventilation Fan with Decorative Light Fixture shall be Broan Model 761BN (761RB) (761WHA).

Unit shall have galvanized steel housing with dual integral mounting brackets. It shall be ducted to a roof or wall cap.

Blower assembly shall be removable and have a permanently lubricated motor.


Light fixture assembly shall be plug-in, removable and include:

- Brushed Nickel finish with White Opal glass (761BN)
- Oil-Rubbed Bronze finish with Ivory Alabaster glass (761RB)
- White finish with White Alabaster glass (761WHA)

Bulbs shall be two 60 Watt maximum, B10 type, candelabra bulbs or energy efficient equivalent.

Air delivery to be no less than 80 cfm and sound level no greater than 2.5 sones. Air and sound ratings shall be certified by HVI.

Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.)

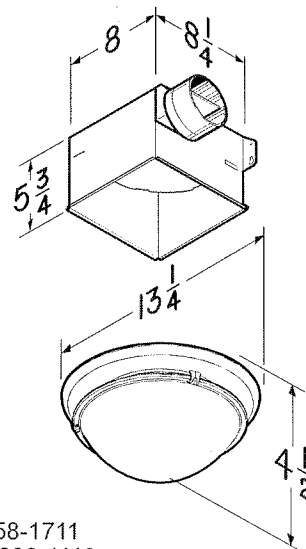

Broan-NuTone LLC Hartford, Wisconsin www.broan.com 800-558-1711
Broan-NuTone Canada Mississauga, Ontario www.broan.ca 877-896-1119

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date