

5

4




3

2

1



C

C

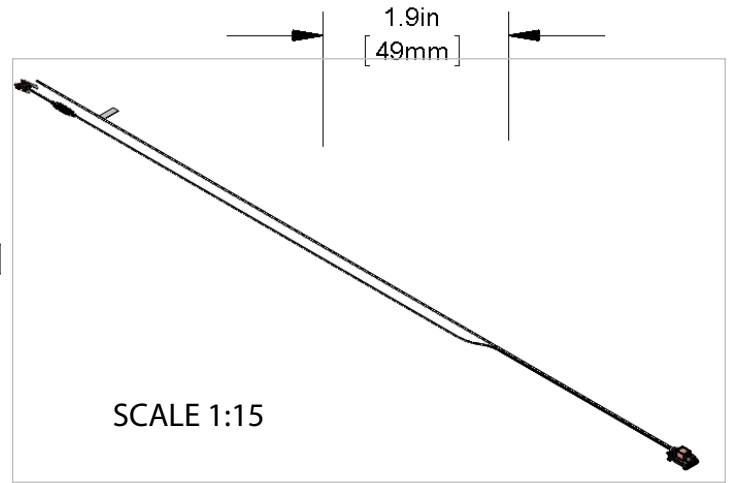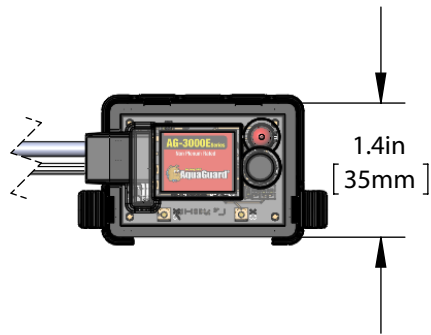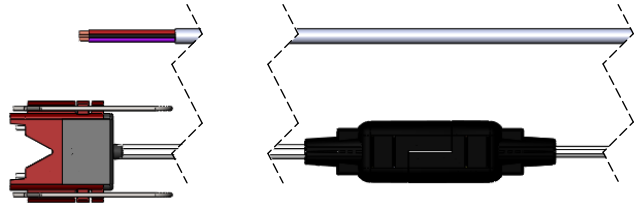

B

B

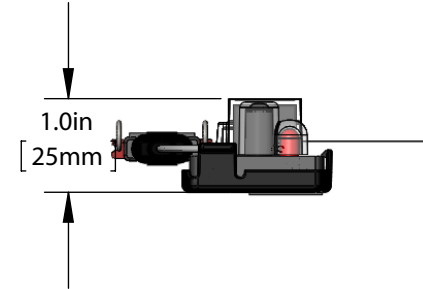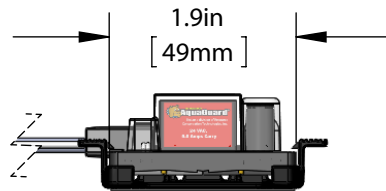

NOTES:
 AG-3180 24 VAC, 5.0 AMPS
 BREAKING/CARRYING
 PLENUM RATED

UNLESS OTHERWISE SPECIFIED:	PROPRIETARY AND CONFIDENTIAL
DIMENSIONS ARE IN INCHES	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RECTORSEAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RECTORSEAL IS PROHIBITED.
TOLERANCES:	
FRACTIONAL ±.032	
ANGULAR: MACH ±.5° BEND ±2°	
TWO PLACE DECIMAL ±.010	
THREE PLACE DECIMAL ±.005	
INTERPRET GEOMETRIC TOLERANCING PER: ANS1 Y14.5, 1994	

ENGINEERING	NAME	DATE
DRAWN BY ENG.	JK	3/1/12
CHECKED BY ENG.	DS	3/1/12
ENG APPR.	CC	3/1/12
MFG APPR.	CC	3/1/12



2601 Spenwick Drive,
 Houston, TX 77055
 800-231-3345

TITLE: AG-3180 SPEIFICATION SHEET		
SIZE A	SCALE: 1:2	SHEET 1 OF 1

5

4

3

2

1

A