
US) ChekPoint [™]
	ChekPoint ⁻

Electronic Sensor Faucet

TAG:

Architect/Engineering Specifications:

4" deck mount electronic sensor faucet with polished chrome plated brass body with integral spout, 2.2 GPM vandal resistant aerator, AC/DC control module with internal flow control setting switches, temperature control mixing valve with check valves, hydro-generator power supply and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.

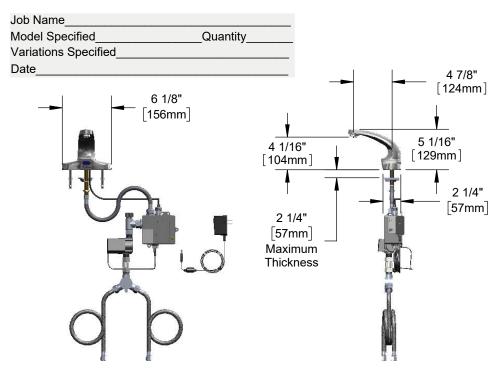



Features & Benefits:

- 4" deck mount faucet w/ polished chrome plated brass body with integral spout
- 2.2 GPM vandal resistant aerator, Series 8 (B-0199-08)
- Water resistant control module w/ internal flow control switches for adjusting auto time out & shut off delay settings
- Optional auto flush feature flows water for 30 seconds after every 12 inactive hours
- Hydro-generator power supply
- Plug in AC transformer or (4) AA battery (DC) power options
- Mechanical temperature mixing valve with check valves
- 18" flexible stainless steel supply hoses with 3/8" compression connections
- Low battery LED indicator light
- Material: Polished chrome plated brass body

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951

Warranty: Three Year (Limited)

ADA Compliant

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F Flow Rate: 2.2 GPM @ 60 psi

Water Consumption: @ 10 sec = .37 gal

@ 15 sec = .55 gal



Optional Outlets (Series 3 / VR Series 8)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-03-N035	N/A	□ B-0199-08-N035
0.5	N/A	□ B-0199-03-N05	N/A	□ B-0199-08-N05
1.0	N/A	N/A	N/A	□ B-0199-08-LF-10
1.5	□ B-0199-03-WS	N/A	□ B-0199-08-WS	N/A
2.2	□ B-0199-03	□ B-0199-26	Standard	□ B-0199-28







T&S BRASS AND BRONZE WORKS, INC.

