



# SUBMITTAL INFORMATION

## Iron Service Saddles - (FC202-xxx-TAP style)



### FC202 EPOXY COATED DOUBLE BAND IRON SERVICE SADDLES FOR DUCTILE IRON AND A/C PIPE

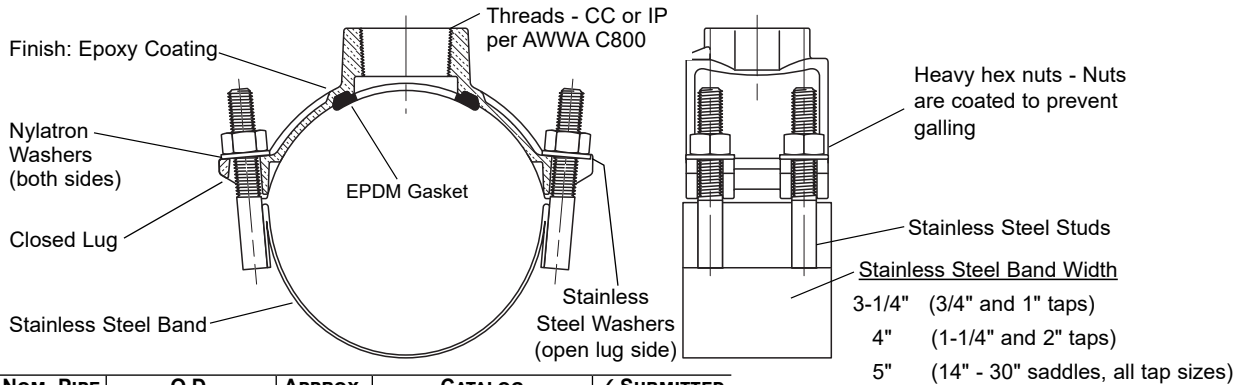

NOM. PIPE SIZE	O.D. RANGE (IN.)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	2.35 - 2.50	2.8	FC202-250-TAP	
2-1/2"	2.75 - 2.90	2.8	FC202-290-TAP	
3"	*3.46 - 3.80	4.8	FC202-380-TAP	
	*3.80 - 4.25	5.5	FC202-425-TAP	
4"	**4.26 - 4.80	5.4	FC202-480-TAP	
	▲ 4.74 - 5.00	5.4	FC202-500-TAP	
	*4.74 - 5.26	5.4	FC202-526-TAP	
	▲ 4.97 - 5.26	5.4	FC202-526-TAP	
6"	*4.50 - 5.40	5.4	FC202-540-TAP	
	5.94 - 6.69	5.7	FC202-669-TAP	
	6.63 - 6.90	5.7	FC202-690-TAP	
	6.84 - 7.60	6.7	FC202-760-TAP	
8"	6.63 - 7.61	6.7	FC202-761-TAP	
	7.93 - 8.71	6.8	FC202-871-TAP	
	8.63 - 9.05	8.2	FC202-905-TAP	
	8.99 - 9.79	8.4	FC202-979-TAP	
10"	8.63 - 9.80	8.4	FC202-980-TAP	
	10.00 - 10.75	9.4	FC202-1075-TAP	
	10.75 - 11.10	9.0	FC202-1110-TAP	
	11.10 - 12.12	10.8	FC202-1212-TAP	
12"	10.64 - 12.13	10.8	FC202-1213-TAP	
	12.00 - 12.75	11.0	FC202-1275-TAP	
	12.75 - 13.20	9.0	FC202-1320-TAP	
	13.20 - 14.38	12.8	FC202-1438-TAP	
14"	12.62 - 14.39	12.8	FC202-1439-TAP	
	15.30 - 16.25	11.9	FC202-1625-TAP	
	16.30 - 17.25	12.9	FC202-1725-TAP	
	17.40 - 18.40	13.1	FC202-1840-TAP	
16"	18.50 - 19.25	12.3	FC202-1925-TAP	
	19.50 - 20.50	13.1	FC202-2050-TAP	
20"	21.20 - 22.20	13.2	FC202-2220-TAP	
	22.50 - 23.50	13.3	FC202-2350-TAP	
24"	23.80 - 24.80	13.4	FC202-2480-TAP	
	25.60 - 26.50	13.9	FC202-2650-TAP	
30"	31.74 - 32.74	14.8	FC202-3274-TAP	

- \* Saddles with this pipe range are not available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.
- \*\* These saddles with 2" CC (CC7) or 2-1/2" IP (IP8) taps only fit 4.80" O.D. pipe. Example: FC202-480-CC7 fits 4.80 pipe O.D. only.
- ▲ This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

#### OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	Δ CC5	
1-1/2" CC	CC6	
2" CC	CC7	
IP THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

Δ Contact factory for availability

#### FEATURES

- Body made of high strength ductile iron per ASTM A536
- Double wide band and 5/8" UNC threaded studs of type 304 stainless steel. For saddles 3" or smaller, studs are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- Finish on saddle body is fusion-bonded epoxy coating
- Certified to ANSI/NSF Standard 61
- Rated for the lesser of 350 psi on sizes 2"-12", 250 psi on sizes 14"-30", or the pressure of the pipe on which it is installed
- Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**  
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
 Phone: 260-563-3171 / Fax: 800-826-3487  
 Overseas Fax: 260-563-0167  
 www.fordmeterbox.com

06/06/19

Submitted By: