


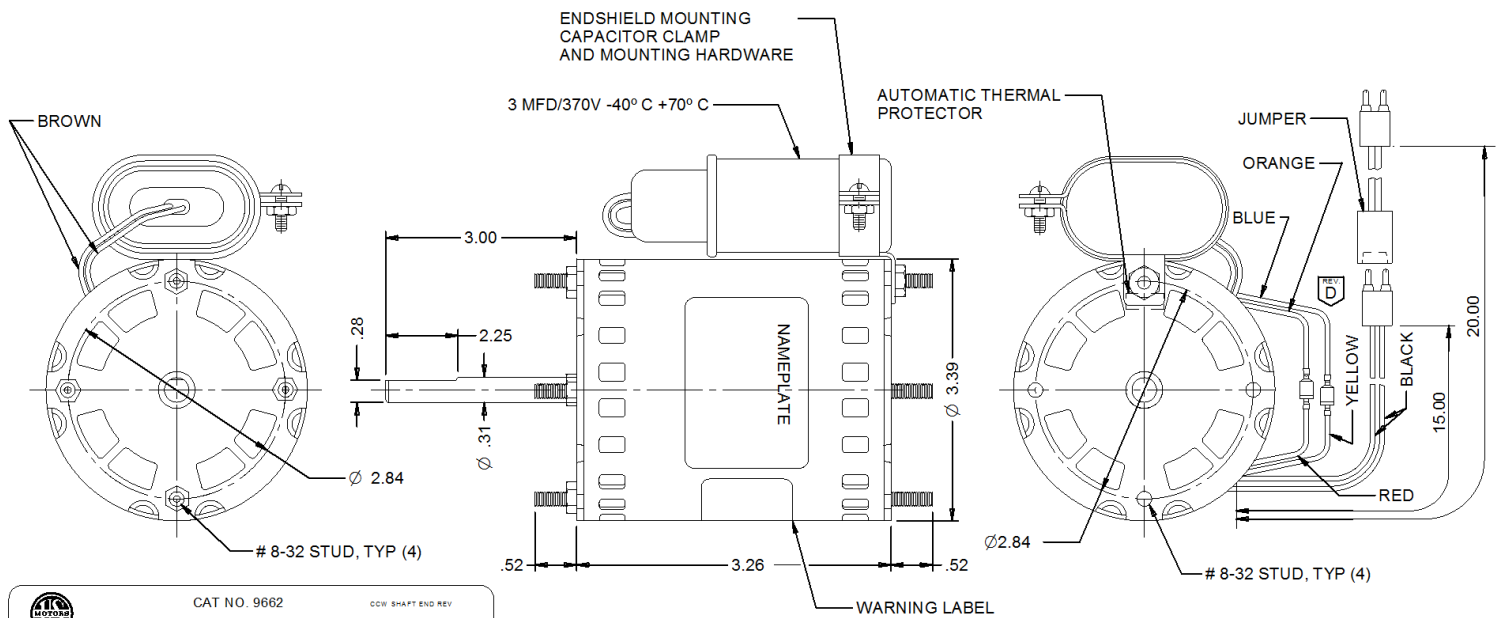

CAT NO. 9662

MODEL K33NVWLB-1409 HP 1/20

VOLT 115 HZ 60 AMP 0.85 PH 1

R.P.M. 1550 & 1200 THERMALLY PROTECTED

INS CLS 40° C AMB MFG. NO. (XXX) 12

AIR OVER CONT

us

WARNING: FOLLOW ALL SAFETY INFORMATION TO REDUCE POTENTIAL ELECTRICAL SHOCK DISCONNECT POWER BEFORE SERVICING. FOLLOW NATIONAL AND LOCAL CODES FOR GROUNDING AND INSULATE UNUSED LEAD WIRES INDIVIDUALLY.

NIDEC MOTOR CORPORATION www.usmotors.com MADE IN CHINA

CCW SHAFT END REV

BLK - LINE

BLK - LINE

YEL → INS

BLU → INS

RED → INS

ORG → INS

TO REVERSE ROTATION INTERCHANGE BLU & ORG LEADS

CAP 3 MFD 370 VAC

ALL DIMENSIONS ARE IN INCHES

MODEL		REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN	
K33NVWLB-1409		--	WHOLESALE-HAC	1/20	115	0.85	60	1550	CCW SHAFT END REV	9662	
SHEET NUMBER	REV	REVISION RECORD FOR: C4928-00			INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION				NIDEC MOTOR CORPORATION		
1 OF 1	D	RELOCATED LEAD EXITS AT TO 45°, REVISED NAMEPLATE TO 50mm X 90mm AND REFORMATTED (SHEET 2)									
REVISION DATE											
05-JAN-12					ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN						
ISSUED BY		REVIEWED BY		ENGINEER APPROVED	TITLE				CODE	ITEM NO.	SIZE
M. COLLINS		M. COLLINS		M. COLLINS	ASSEMBLED VIEW				V01	778369	B

NIDEC MOTOR CORPORATION 10-Jan-12

V01_NMCB (MAR-2011)

SOLIDEDGE