



100 Royal Way
Temple, GA 30179
Phone (800) 520-6593

SPECIFICATION DATA SHEET

Date: 8/1/2025

MODEL No. 168 Air Tite with Damper for Duct

DIMENSIONAL DATA

SIZES AVAILABLE: 4" THROUGH 20" DIAMETER

FABRICATION DATA

Material:

ASTM-A653 CS Type B Galvanized Steel,
G-30 Coating LFQ Chemical Treatment

Gasket:

Fire Retardant Polyethylene Foam with Double Stick
3M Tape UL94 HF-1

A

<u>Diameter</u>	<u>Gauges</u>	<u>Total Height</u>
4"-9"	30GA	5 1/2"
10"-20"	28GA	5 1/2"

*See Note below for Smacna Requirements

Assembly:

Air Tites are assembled with 1/8" x 1/8" Zinc Coated Steel
Rivets.

OPTIONS


Available in 26GA and 24GA upon request

Raised Quadrants:


Duro Dyne #7206 ESO14R-200 1/4" standoff regulator 2" wrap or
Rossi TwistKnob 3/8" Continuous Rod

SMACNA Requirements:

*ASTM-A653 CS Type B Galvanized Steel 26GA

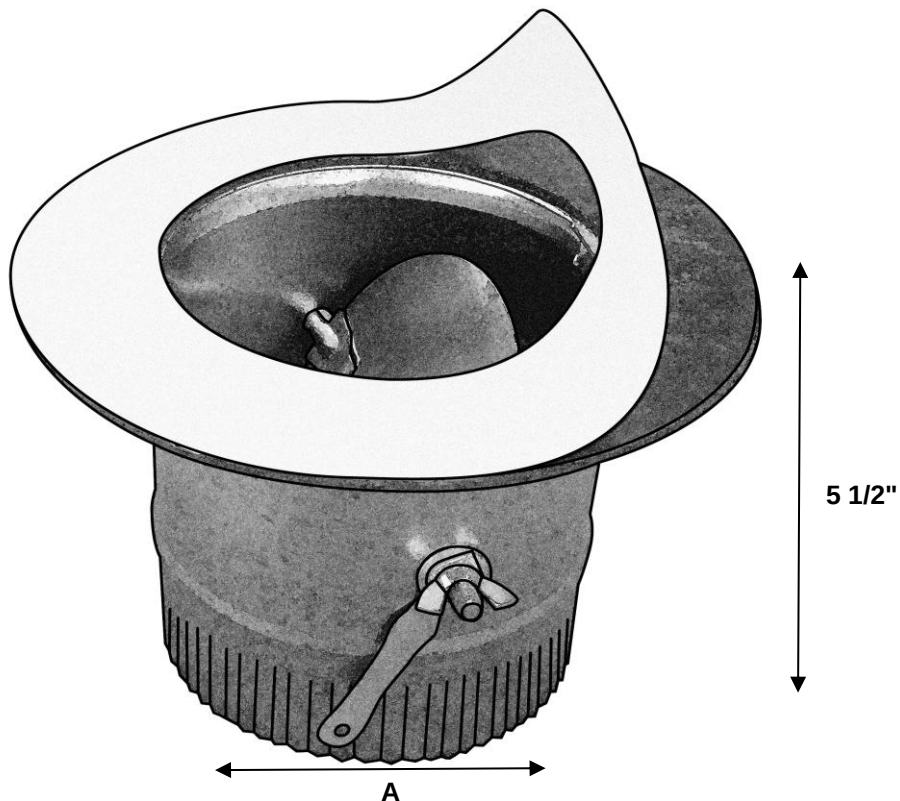

Rossi Twistknob 3/8" Rod



Superior Quality, Superior Service, Superior Value.. that's the Royal Advantage