



The new degree of comfort.™

Rheem *Value Series* Air Conditioners



14AJM- Series

Efficiencies up to 16.5 SEER/14 EER

Nominal Sizes 1¹/₂-5 Ton [5.28 to 17.6 kW]

Cooling Capacities 19,600 to 56,500 BTU/H
[7.44 to 16.70 kW]



"Proper sizing and installation of equipment is critical to achieve optimal performance. Ask your Contractor for details or visit www.energystar.gov."

Note: Above image does not show deep drawn basepan.

- Outdoor air conditioner designed for ground level or rooftop installations. These units offer comfort and dependability for single, multi-family and light commercial applications.
- Painted louvered steel cabinet
- Easily accessible control box
- Condenser coils constructed with copper tubing and enhanced aluminum fins
- Grille/Motor mount for quiet fan operation
- Filter Drier (shipped – not installed)



TABLE OF CONTENTS

Model Number Identification	3
Accessories.....	3
Scroll Compressor	3
Performance Data	4-35
Electrical & Physical Data	36
Unit Dimensions.....	37
Refrigerant Line Size Information	38
Limited Warranty	39

Model Number Identification

<u>14</u>	<u>A</u>	<u>J</u>	<u>M</u>	<u>18</u>	<u>A</u>	<u>01</u>
14.5 SEER	A = AIR CONDITIONER	<u>VOLTAGE</u> J = 208-230 SINGLE PHASE	<u>DESIGN SERIES</u> M = 1ST DESIGN R-410A	<u>NOMINAL COOLING CAPACITY</u> 18 = 18,000 BTU/HR [5.28 kW] 24 = 24,000 BTU/HR [7.03 kW] 30 = 30,000 BTU/HR [8.79 kW] 36 = 36,000 BTU/HR [10.55 kW] 42 = 42,000 BTU/HR [12.31 kW] 48 = 48,000 BTU/HR [14.07 kW] 49 = 47,000 BTU/HR [13.77 kW] 56 = 54,000 BTU/HR [15.83 kW] 60 = 60,000 BTU/HR [17.58 kW]	<u>CABINET</u> A = FULL METAL JACKET	RHEEM VALUE SERIES

Accessories

- Low Pressure Control (RXAC-A07)
- High Pressure Control (RXAB-A07)
- Low Ambient Control (RXAD-A08)
- Compressor Time Delay Control
- Crankcase Heater
- Sound Enclosure

Thermostats



200-Series *
Programmable



300-Series *
Deluxe
Programmable

400-Series *
Special Applications/
Programmable



500-Series *
Communicating/
Programmable

Brand	Descriptor (3 Characters)	Series (3 Characters)	System (2 Characters)	Type (2 Characters)
RHC	-	TST	213	UN
RHC=Rheem	TST=Thermostat	200=Programmable 300=Deluxe Programmable 400=Special Applications/ Programmable 500=Communicating/ Programmable	GE=Gas/Electric UN=Universal (AC/HP/GE) MD=Modulating Furnace DF=Dual Fuel CM=Communicating	SS=Single-Stage MS=Multi-Stage

* Photos are representative. Actual models may vary.

For detailed thermostat match-up information,
see specification sheet form number T11-001.

Scroll® Compressor

The reliable scroll compressor is the key to efficiency for this Rheem model. It's the latest in high-efficiency compressor technology. The advanced scroll compressor offers low noise and vibration characteristics and features tolerance to liquid refrigerant and system contamination. The scroll compressor also has low start torque, reducing start problems in the field. And its unique design enables air conditioners to perform efficiently and quietly.

[] Designates Metric Conversions



Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*2417 ①	19,300 [5.7]	13,850 [4.1]	5,450 [1.6]	12.00	14.50	74	600 [283]
	RHAL-FR18P	19,900 [5.8]	14,750 [4.3]	5,150 [1.5]	12.00	14.50	74	600 [283]
	RHBL-FR24T	20,200 [5.9]	15,050 [4.4]	5,150 [1.5]	13.00	16.00	74	600 [283]
	RCFL-A*2414	19,300 [5.7]	13,900 [4.1]	5,400 [1.6]	12.00	14.50	74	600 [283]
	RCFL-A*2417	19,300 [5.7]	13,900 [4.1]	5,400 [1.6]	12.00	14.50	74	600 [283]
	RCFL-A*2417(RGFE-06?MCK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	575 [271]
	RCFL-A*2417(RGFE-07?MCK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	600 [283]
	RCFL-A*2417(RGFG-06?MCK?)	19,700 [5.8]	14,100 [4.1]	5,600 [1.6]	13.00	16.00	74	575 [271]
	RCFL-A*2417(RGFG-07?MCK?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	600 [283]
	RCFL-A*2417(RGGE-06?MCK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	625 [295]
18	RCFL-A*2417(RGGE-07?MCK?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	575 [271]
	RCFL-A*2417(RGLE-07?AMK?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	600 [283]
	RCFL-A*2417(RGLT-07?AMK?)	20,200 [5.9]	14,750 [4.3]	5,450 [1.6]	13.00	16.00	74	675 [319]
	RCFL-A*2417(RGPE-05?BMK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	575 [271]
	RCFL-A*2417(RGPE-07?AMK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	625 [295]
	RCFL-A*2417(RGPT-05?BMK?)	20,000 [5.9]	14,550 [4.3]	5,450 [1.6]	13.00	16.00	74	650 [307]
	RCFL-A*2417(RGPT-07?AMK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	625 [295]
	RCFL-A*2417(RGRM-04?MAE?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	575 [271]
	RCFL-A*2417(RGRM-06?MAE?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	600 [283]
	RCFL-A*2417(RGRM-07?MAE?)	19,700 [5.8]	14,150 [4.1]	5,550 [1.6]	13.00	16.00	74	625 [295]
	RCFL-A*2417(RGTM-06?MAE?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	575 [271]
	RCFL-A*2417(ROCA-070E03)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	600 [283]
	RCFL-A*2417(ROLA-070E03)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	600 [283]
	RCFL-H*2414	19,300 [5.7]	13,900 [4.1]	5,400 [1.6]	12.00	14.50	74	600 [283]
	RCFL-H*2417(RGFE-06?MCK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	575 [271]
	RCFL-H*2417(RGFE-07?MCK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	600 [283]
	RCFL-H*2417(RGFG-06?MCK?)	19,700 [5.8]	14,100 [4.1]	5,600 [1.6]	13.00	16.00	74	575 [271]
	RCFL-H*2417(RGFG-07?MCK?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	600 [283]
	RCFL-H*2417(RGGE-06?MCK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	625 [295]
	RCFL-H*2417(RGGE-07?MCK?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	575 [271]
	RCFL-H*2417(RGJF-06?MCK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	625 [295]
	RCFL-H*2417(RGJF-07?MCK?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	575 [271]
	RCFL-H*2417(RGLE-07?AMK?)	19,800 [5.8]	14,200 [4.2]	5,600 [1.6]	13.00	16.00	74	600 [283]
	RCFL-H*2417(RGLT-07?AMK?)	20,200 [5.9]	14,750 [4.3]	5,450 [1.6]	13.00	16.00	74	675 [319]
	RCFL-H*2417(RGPE-05?BMK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	575 [271]
	RCFL-H*2417(RGPE-07?AMK?)	19,800 [5.8]	14,250 [4.2]	5,550 [1.6]	13.00	16.00	74	62

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12 18	RCQD-2417(RGJF-06?MCK?)	20,000 [5.9]	14,650 [4.3]	5,350 [1.6]	13.00	16.00	74	625 [295]
	RCQD-2417(RGJF-07?MCK?)	19,800 [5.8]	14,400 [4.2]	5,400 [1.6]	13.00	16.00	74	575 [271]
	RCQD-2417(RGPE-05?BMK?)	19,800 [5.8]	14,400 [4.2]	5,400 [1.6]	13.00	16.00	74	575 [271]
	RCQD-2417(RGPE-07?AMK?)	20,000 [5.9]	14,650 [4.3]	5,350 [1.6]	13.00	16.00	74	625 [295]
	RCQD-2417(RGPT-05?BMK?)	20,200 [5.9]	14,900 [4.4]	5,300 [1.6]	13.00	16.00	74	650 [307]
	RCQD-2417(RGPT-07?AMK?)	20,400 [6.0]	15,150 [4.4]	5,250 [1.5]	13.00	16.00	74	675 [319]
	RCQD-2417(RGRM-04?MAE?)	19,800 [5.8]	14,400 [4.2]	5,400 [1.6]	13.00	16.00	74	575 [271]
	RCQD-2417(RGRM-06?MAE?)	20,000 [5.9]	14,650 [4.3]	5,350 [1.6]	13.00	16.00	74	600 [283]
	RCQD-2417(RGRM-07?MAE?)	19,900 [5.8]	14,550 [4.3]	5,350 [1.6]	13.00	16.00	74	625 [295]
	RCQD-2417(ROCA-070E03)	20,000 [5.9]	14,600 [4.3]	5,400 [1.6]	13.00	16.00	74	600 [283]
	RCQD-2417(ROLA-070E03)	20,000 [5.9]	14,650 [4.3]	5,350 [1.6]	13.00	16.00	74	600 [283]
	RHKL-HM2417(RCSL-H*2417)	20,000 [5.9]	14,500 [4.2]	5,500 [1.6]	13.00	16.00	74	650 [307]
	RHLL-HM2417(RCSL-H*2417)	20,000 [5.9]	14,500 [4.2]	5,500 [1.6]	13.00	16.00	74	650 [307]
	RHSL-HM1817(RCSL-H*2417)	19,500 [5.7]	14,000 [4.1]	5,500 [1.6]	12.50	15.00	74	600 [283]
24	RCFL-H*2417+RXMD-C04 ①	23,600 [6.9]	16,800 [4.9]	6,800 [2.0]	12.00	14.50	74	800 [378]
	RHAL-FR24P	24,200 [7.1]	18,900 [5.5]	5,300 [1.6]	12.00	14.50	74	800 [378]
	RHBL-FR24T	24,400 [7.1]	19,100 [5.6]	5,300 [1.6]	12.50	15.00	74	800 [378]
	RCFL-A*2414+RXMD-C04	23,600 [6.9]	16,900 [5.0]	6,800 [2.0]	12.00	14.50	74	800 [378]
	RCFL-A*2417(RGFE-06?MCK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	15.50	74	800 [378]
	RCFL-A*2417(RGFE-07?MCK?)	24,000 [7.0]	17,050 [5.0]	6,950 [2.0]	13.00	15.50	74	825 [389]
	RCFL-A*2417(RGFG-06?MCK?)	24,000 [7.0]	17,100 [5.0]	6,900 [2.0]	13.00	15.50	74	800 [378]
	RCFL-A*2417(RGFG-07?MCK?)	24,200 [7.1]	17,200 [5.0]	7,000 [2.1]	13.00	15.50	74	800 [378]
	RCFL-A*2417(RGGE-06?MCK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	16.00	74	825 [389]
	RCFL-A*2417(RGGE-07?MCK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	15.50	74	800 [378]
	RCFL-A*2417(RGLE-07?AMK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	16.00	74	800 [378]
	RCFL-A*2417(RGLT-07?AMK?)	23,600 [6.9]	16,300 [4.8]	7,300 [2.1]	13.00	16.00	74	675 [319]
	RCFL-A*2417(RGPE-05?BMK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	15.50	74	800 [378]
	RCFL-A*2417(RGPE-07?AMK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	16.00	74	825 [389]
	RCFL-A*2417(RGPT-05?BMK?)	23,400 [6.9]	16,100 [4.7]	7,300 [2.1]	13.00	16.00	74	650 [307]
	RCFL-A*2417(RGPT-07?AMK?)	24,400 [7.1]	17,600 [5.2]	6,800 [2.0]	13.00	15.50	74	850 [401]
	RCFL-A*2417(RGRM-04?MAE?)	24,000 [7.0]	17,100 [5.0]	6,900 [2.0]	13.00	15.50	74	800 [378]
	RCFL-A*2417(RGRM-06?MAE?)	24,000 [7.0]	17,100 [5.0]	6,900 [2.0]	13.00	15.50	74	825 [389]
	RCFL-A*2417(RGRM-07?MAE?)	24,200 [7.1]	17,450 [5.1]	6,750 [2.0]	12.50	15.10	74	850 [401]
	RCFL-A*2417(RGTM-06?MAE?)	24,000 [7.0]	16,900 [5.0]	7,100 [2.1]	13.00	16.00	74	750 [354]
	RCFL-A*2417(RHWP-04WMX36A)	24,200 [7.1]	17,400 [5.1]	6,800 [2.0]	13.00	16.00	74	825 [389]
	RCFL-A*2417(ROCA-070E03)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	16.00	74	800 [378]
	RCFL-A*2417(ROLA-070E03)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	16.00	74	800 [378]
	RCFL-A*2417+RXMD-C04	23,600 [6.9]	16,900 [5.0]	6,800 [2.0]	12.00	14.50	74	800 [378]
	RCFL-H*2414+RXMD-C04	23,600 [6.9]	16,900 [5.0]	6,800 [2.0]	12.00	14.50	74	800 [378]
	RCFL-H*2417(RGFE-06?MCK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	15.50	74	800 [378]
	RCFL-H*2417(RGFE-07?MCK?)	24,000 [7.0]	17,050 [5.0]	6,950 [2.0]	13.00	15.50	74	825 [389]
	RCFL-H*2417(RGFG-06?MCK?)	24,000 [7.0]	17,100 [5.0]	6,900 [2.0]	13.00	15.50	74	800 [378]
	RCFL-H*2417(RGFG-07?MCK?)	24,200 [7.1]	17,200 [5.0]	7,000 [2.1]	13.00	15.50	74	800 [378]
	RCFL-H*2417(RGGE-06?MCK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	16.00	74	825 [389]
	RCFL-H*2417(RGGE-07?MCK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	15.50	74	800 [378]
	RCFL-H*2417(RGJF-06?MCK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	16.00	74	825 [389]
	RCFL-H*2417(RGJF-07?MCK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	15.50	74	800 [378]
	RCFL-H*2417(RGLE-07?AMK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	16.00	74	800 [378]
	RCFL-H*2417(RGLT-07?AMK?)	23,600 [6.9]	16,300 [4.8]	7,300 [2.1]	13.00	16.00	74	675 [319]
	RCFL-H*2417(RGPE-05?BMK?)	24,200 [7.1]	17,250 [5.1]	6,950 [2.0]	13.00	15.50	74	800 [378]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

24

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12 24	RCQD-2417(RGFE-06?MCK?)	24,400 [7.1]	17,450 [5.1]	6,950 [2.0]	13.00	16.00	74	725 [342]
	RCQD-2417(RGFE-07?MCK?)	24,800 [7.3]	18,050 [5.3]	6,750 [2.0]	13.00	16.00	74	825 [389]
	RCQD-2417(RGFG-06?MCK?)	24,800 [7.3]	18,100 [5.3]	6,700 [2.0]	13.00	16.00	74	800 [378]
	RCQD-2417(RGFG-07?MCK?)	24,800 [7.3]	18,050 [5.3]	6,750 [2.0]	13.00	16.00	74	800 [378]
	RCQD-2417(RGJF-06?MCK?)	24,800 [7.3]	18,050 [5.3]	6,750 [2.0]	13.00	16.00	74	825 [389]
	RCQD-2417(RGJF-07?MCK?)	24,800 [7.3]	18,050 [5.3]	6,750 [2.0]	13.00	16.00	74	800 [378]
	RCQD-2417(RGPE-05?BMK?)	24,800 [7.3]	18,050 [5.3]	6,750 [2.0]	13.00	16.00	74	800 [378]
	RCQD-2417(RGPE-07?AMK?)	25,000 [7.3]	18,250 [5.3]	6,750 [2.0]	13.00	16.00	74	825 [389]
	RCQD-2417(RGPT-05?BMK?)	25,400 [7.4]	18,950 [5.6]	6,450 [1.9]	13.00	16.00	74	900 [425]
	RCQD-2417(RGRM-04?MAE?)	24,600 [7.2]	17,750 [5.2]	6,850 [2.0]	13.00	16.00	74	750 [354]
	RCQD-2417(RGRM-06?MAE?)	25,000 [7.3]	18,250 [5.3]	6,750 [2.0]	13.00	16.00	74	775 [366]
	RCQD-2417(RGRM-07?MAE?)	24,800 [7.3]	18,100 [5.3]	6,700 [2.0]	13.00	15.50	74	800 [378]
	RCQD-2417(RHWP-04WMX36A)	25,400 [7.4]	19,100 [5.6]	6,300 [1.8]	13.00	16.00	74	875 [413]
	RCQD-2417(ROCA-070E03)	25,000 [7.3]	18,250 [5.3]	6,750 [2.0]	13.00	16.00	74	800 [378]
	RCQD-2417(ROLA-070E03)	25,000 [7.3]	18,250 [5.3]	6,750 [2.0]	13.00	16.00	74	800 [378]
	RCQD-2417+RXMD-C04	24,200 [7.1]	17,650 [5.2]	6,550 [1.9]	12.00	14.50	74	800 [378]
	RHKL-HM2417(RCSL-H*2417)	24,400 [7.1]	17,550 [5.1]	6,850 [2.0]	13.00	16.00	74	850 [401]
	RHLL-HM2417(RCSL-H*2417)	24,400 [7.1]	17,400 [5.1]	7,000 [2.1]	13.50	16.50	74	775 [366]
	RHSL-HM2417(RCSL-H*2417)	23,800 [7.0]	16,950 [5.0]	6,850 [2.0]	12.50	14.50	74	800 [378]
30	RCFL-H*3617+RXMD-C04 ①	28,200 [8.3]	20,250 [5.9]	7,950 [2.3]	12.00	14.50	76	950 [448]
	RHAL-FR30P	28,400 [8.3]	21,900 [6.4]	6,500 [1.9]	12.00	14.50	76	975 [460]
	RHBL-FR36T	28,800 [8.4]	22,300 [6.5]	6,500 [1.9]	13.00	16.00	76	1,025 [484]
	RCFL-A*3617(RGFE-06?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	12.50	15.10	76	875 [413]
	RCFL-A*3617(RGFE-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	12.50	15.10	76	875 [413]
	RCFL-A*3617(RGFG-06?MCK?)	28,000 [8.2]	19,400 [5.7]	8,600 [2.5]	13.00	15.50	76	800 [378]
	RCFL-A*3617(RGFG-07?MCK?)	28,200 [8.3]	19,500 [5.7]	8,700 [2.5]	13.00	15.50	76	800 [378]
	RCFL-A*3617(RGGE-06?MCK?)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	925 [437]
	RCFL-A*3617(RGGE-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	13.00	15.50	76	875 [413]
	RCFL-A*3617(RGLE-07?AMK?)	29,200 [8.6]	21,350 [6.3]	7,850 [2.3]	13.00	15.50	76	1,025 [484]
	RCFL-A*3617(RGLE-07?BRQ?)	29,000 [8.5]	20,850 [6.1]	8,150 [2.4]	13.00	16.00	76	925 [437]
	RCFL-A*3617(RGLT-07?AMK?)	28,600 [8.4]	20,200 [5.9]	8,400 [2.5]	13.00	15.50	76	875 [413]
	RCFL-A*3617(RGPE-05?BMK?)	28,600 [8.4]	20,300 [5.9]	8,300 [2.4]	13.00	15.50	76	900 [425]
	RCFL-A*3617(RGPE-07?AMK?)	28,600 [8.4]	20,300 [5.9]	8,300 [2.4]	13.00	15.50	76	900 [425]
	RCFL-A*3617(RGPT-05?BMK?)	28,400 [8.3]	19,950 [5.8]	8,450 [2.5]	13.00	15.50	76	850 [401]
	RCFL-A*3617(RGPT-07?AMK?)	28,400 [8.3]	20,000 [5.9]	8,400 [2.5]	13.00	15.50	76	875 [413]
	RCFL-A*3617(RGRM-04?MAE?)	28,800 [8.4]	21,050 [6.2]	7,750 [2.3]	12.00	14.50	76	1,025 [484]
	RCFL-A*3617(RGRM-06?MAE?)	28,800 [8.4]	20,950 [6.1]	7,850 [2.3]	12.00	14.50	76	1,000 [472]
	RCFL-A*3617(RGRM-07?MAE?)	28,200 [8.3]	19,800 [5.8]	8,400 [2.5]	12.50	15.10	76	850 [401]
	RCFL-A*3617(RGTM-06?MAE?)	28,600 [8.4]	20,300 [5.9]	8,300 [2.4]	13.00	15.50	76	900 [425]
	RCFL-A*3617(RGTM-07?RBG?)	29,200 [8.6]	21,450 [6.3]	7,750 [2.3]	13.00	15.50	76	1,050 [495]
	RCFL-A*3617(RGTM-09?ZAJ?)	28,800 [8.4]	20,650 [6.1]	8,150 [2.4]	13.00	15.50	76	975 [460]
	RCFL-A*3617(RHWP-04WMX36A)	29,200 [8.6]	21,600 [6.3]	7,600 [2.2]	13.00	15.50	76	1,050 [495]
	RCFL-A*3617(RHWP-06WMX48A)	28,800 [8.4]	20,800 [6.1]	8,000 [2.3]	13.00	15.50	76	975 [460]
	RCFL-A*3617(ROCA-070E03)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-A*3617(ROCA-070E04)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-A*3617(ROLA-070E03)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	975 [460]
	RCFL-A*3617(ROLA-070E04)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	975 [460]
	RCFL-A*3617+RXMD-C04	28,200 [8.3]	20,400 [6.0]	8,000 [2.3]	12.00	14.50	76	950 [448]
	RCFL-A*3621(RGFE-06?MCK?)	28,800 [8.4]	20,900 [6.1]	7,900 [2.3]	12.50	15.10	76	1,000 [472]
	RCFL-A*3621(RGFE-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	12.50	15.10	76	875 [413]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-A*3621(RGFE-09?ZCM?)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	975 [460]
	RCFL-A*3621(RGFE-10?ZCM?)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-A*3621(RGFG-06?MCK?)	28,000 [8.2]	19,400 [5.7]	8,600 [2.5]	13.00	15.50	76	800 [378]
	RCFL-A*3621(RGFG-07?MCK?)	28,200 [8.3]	19,500 [5.7]	8,700 [2.5]	13.00	15.50	76	800 [378]
	RCFL-A*3621(RGFG-09?ZCM?)	28,400 [8.3]	20,000 [5.9]	8,400 [2.5]	13.00	15.50	76	875 [413]
	RCFL-A*3621(RGFG-10?ZCM?)	28,200 [8.3]	19,500 [5.7]	8,700 [2.5]	13.00	15.50	76	800 [378]
	RCFL-A*3621(RGGE-06?MCK?)	28,800 [8.4]	20,650 [6.1]	8,150 [2.4]	13.00	15.50	76	925 [437]
	RCFL-A*3621(RGGE-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	13.00	15.50	76	875 [413]
	RCFL-A*3621(RGGE-09?ZCM?)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-A*3621(RGGE-10?ZCM?)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
30	RCFL-A*3621(RGJF-06?MCK?)	28,800 [8.4]	20,650 [6.1]	8,150 [2.4]	13.00	15.50	76	925 [437]
	RCFL-A*3621(RGJF-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	13.00	15.50	76	875 [413]
	RCFL-A*3621(RGJF-09?ZCM?)	29,200 [8.6]	21,350 [6.3]	7,850 [2.3]	13.00	15.50	76	1,025 [484]
	RCFL-A*3621(RGJF-10?ZCM?)	29,200 [8.6]	21,450 [6.3]	7,750 [2.3]	13.00	15.50	76	1,050 [495]
	RCFL-A*3621(RGLE-07?AMK?)	29,200 [8.6]	21,350 [6.3]	7,850 [2.3]	13.00	15.50	76	1,025 [484]
	RCFL-A*3621(RGLE-10?BRM?)	29,400 [8.6]	21,600 [6.3]	7,800 [2.3]	13.00	16.00	76	1,050 [495]
	RCFL-A*3621(RGLT-07?AMK?)	28,600 [8.4]	20,200 [5.9]	8,400 [2.5]	13.00	16.00	76	875 [413]
	RCFL-A*3621(RGLT-07?BRQ?)	28,800 [8.4]	20,650 [6.1]	8,150 [2.4]	13.00	16.00	76	975 [460]
	RCFL-A*3621(RGLT-10?BRM?)	29,000 [8.5]	20,850 [6.1]	8,150 [2.4]	13.00	16.00	76	975 [460]
	RCFL-A*3621(RGPE-05?BMK?)	28,600 [8.4]	20,300 [5.9]	8,300 [2.4]	13.00	15.50	76	900 [425]
	RCFL-A*3621(RGPE-07?AMK?)	29,000 [8.5]	21,100 [6.2]	7,900 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-A*3621(RGPE-07?BRQ?)	29,200 [8.6]	21,300 [6.2]	7,900 [2.3]	13.00	16.00	76	1,025 [484]
	RCFL-A*3621(RGPE-10?BRM?)	28,800 [8.4]	20,450 [6.0]	8,350 [2.4]	13.00	16.00	76	900 [425]
	RCFL-A*3621(RGPT-05?BMK?)	28,400 [8.3]	20,000 [5.9]	8,400 [2.5]	13.00	15.50	76	875 [413]
	RCFL-A*3621(RGPT-07?AMK?)	28,600 [8.4]	20,200 [5.9]	8,400 [2.5]	13.00	15.50	76	875 [413]
	RCFL-A*3621(RGPT-07?BRQ?)	29,000 [8.5]	20,850 [6.1]	8,150 [2.4]	13.00	16.00	76	975 [460]
	RCFL-A*3621(RGRM-04?MAE?)	28,800 [8.4]	21,050 [6.2]	7,750 [2.3]	12.00	14.50	76	1,025 [484]
	RCFL-A*3621(RGRM-06?MAE?)	28,200 [8.3]	19,650 [5.8]	8,550 [2.5]	12.50	15.10	76	825 [389]
	RCFL-A*3621(RGRM-07?MAE?)	28,200 [8.3]	19,800 [5.8]	8,400 [2.5]	12.50	15.10	76	850 [401]
	RCFL-A*3621(RGRM-07?YBG?)	28,400 [8.3]	20,400 [6.0]	8,000 [2.3]	12.00	14.50	76	975 [460]
	RCFL-A*3621(RGRM-09?ZAJ?)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	950 [448]
	RCFL-A*3621(RGRM-10?ZAJ?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	13.00	15.50	76	875 [413]
	RCFL-A*3621(RHWB-04WMX36A)	29,200 [8.6]	21,600 [6.3]	7,600 [2.2]	13.00	15.50	76	1,050 [495]
	RCFL-A*3621(RHWB-06WMX48A)	29,000 [8.5]	21,200 [6.2]	7,800 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-A*3621(ROCA-070E03)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-A*36							

[1 Designates Metric Conversions

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-A*3821(RGPT-10?BRM?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-A*3821(RGRM-04?MAE?)	29,400 [8.6]	21,550 [6.3]	7,850 [2.3]	13.00	15.50	76	925 [437]
	RCFL-A*3821(RGRM-06?MAE?)	28,800 [8.4]	20,450 [6.0]	8,350 [2.4]	13.00	16.00	76	825 [389]
	RCFL-A*3821(RGRM-07?MAE?)	29,000 [8.5]	20,800 [6.1]	8,200 [2.4]	13.00	15.50	76	850 [401]
	RCFL-A*3821(RGRM-07?YBG?)	28,800 [8.4]	20,600 [6.0]	8,200 [2.4]	13.00	15.50	76	850 [401]
	RCFL-A*3821(RGRM-09?ZAJ?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	950 [448]
	RCFL-A*3821(RGRM-10?ZAJ?)	29,200 [8.6]	21,050 [6.2]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-A*3821(ROCA-070E03)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-A*3821(ROCA-070E04)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-A*3821(ROLA-070E03)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
30	RCFL-A*3821(ROLA-070E04)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-A*3821(ROLA-115E05)	30,000 [8.8]	22,450 [6.6]	7,550 [2.2]	13.00	16.00	76	1,050 [495]
	RCFL-A*3824(RGFG-09?ZCM?)	29,200 [8.6]	21,000 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-A*3824(RGFG-10?ZCM?)	29,400 [8.6]	21,300 [6.2]	8,100 [2.4]	13.00	16.00	76	900 [425]
	RCFL-A*3824(RGFG-12?RCM?)	29,400 [8.6]	21,200 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-A*3824(RGLT-07?BRQ?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-A*3824(RGLT-10?BRM?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-A*3824(RGLT-12?ARM?)	29,800 [8.7]	21,850 [6.4]	7,950 [2.3]	13.00	16.00	76	975 [460]
	RCFL-A*3824(RGPT-07?BRQ?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-A*3824(RGPT-10?BRM?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-A*3824(RGPT-12?ARM?)	29,800 [8.7]	21,850 [6.4]	7,950 [2.3]	13.00	16.00	76	975 [460]
	RCFL-A*3824(RGRM-07?YBG?)	28,800 [8.4]	20,600 [6.0]	8,200 [2.4]	13.00	15.50	76	850 [401]
	RCFL-A*3824(RGRM-09?ZAJ?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	950 [448]
	RCFL-A*3824(RGRM-10?ZAJ?)	29,200 [8.6]	21,050 [6.2]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-A*3824(RGRM-12?RAJ?)	29,600 [8.7]	21,650 [6.3]	7,950 [2.3]	13.00	16.00	76	925 [437]
	RCFL-A*3824(ROCA-070E03)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-A*3824(ROCA-070E04)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-A*3824(ROLA-070E03)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-A*3824(ROLA-070E04)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-A*3824(ROLA-115E05)	30,000 [8.8]	22,450 [6.6]	7,550 [2.2]	13.00	16.00	76	1,050 [495]
	RCFL-H*3617(RGFE-06?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	12.50	15.10	76	875 [413]
	RCFL-H*3617(RGFE-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	12.50	15.10	76	875 [413]
	RCFL-H*3617(RGFG-06?MCK?)	28,000 [8.2]	19,400 [5.7]	8,600 [2.5]	13.00	15.50	76	800 [378]
	RCFL-H*3617(RGFG-07?MCK?)	28,200 [8.3]	19,500 [5.7]	8,700 [2.5]	13.00	15.50	76	800 [378]
	RCFL-H*3617(RGGE-06?MCK?)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	925 [437]
	RCFL-H*3617(RGGE-07?M							

[1 Designates Metric Conversions

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*3617(ROCA-070E03)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-H*3617(ROCA-070E04)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-H*3617(ROLA-070E03)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	975 [460]
	RCFL-H*3617(ROLA-070E04)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	975 [460]
	RCFL-H*3621(RGFE-06?MCK?)	28,800 [8.4]	20,900 [6.1]	7,900 [2.3]	12.50	15.10	76	1,000 [472]
	RCFL-H*3621(RGFE-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	12.50	15.10	76	875 [413]
	RCFL-H*3621(RGFE-09?ZCM?)	28,800 [8.4]	20,700 [6.1]	8,100 [2.4]	13.00	15.50	76	975 [460]
	RCFL-H*3621(RGFE-10?ZCM?)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-H*3621(RGFG-06?MCK?)	28,000 [8.2]	19,400 [5.7]	8,600 [2.5]	13.00	15.50	76	800 [378]
	RCFL-H*3621(RGFG-07?MCK?)	28,200 [8.3]	19,500 [5.7]	8,700 [2.5]	13.00	15.50	76	800 [378]
30	RCFL-H*3621(RGFG-09?ZCM?)	28,400 [8.3]	20,000 [5.9]	8,400 [2.5]	13.00	15.50	76	875 [413]
	RCFL-H*3621(RGFG-10?ZCM?)	28,200 [8.3]	19,500 [5.7]	8,700 [2.5]	13.00	15.50	76	800 [378]
	RCFL-H*3621(RGGE-06?MCK?)	28,800 [8.4]	20,650 [6.1]	8,150 [2.4]	13.00	15.50	76	925 [437]
	RCFL-H*3621(RGGE-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	13.00	15.50	76	875 [413]
	RCFL-H*3621(RGGE-09?ZCM?)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-H*3621(RGGE-10?ZCM?)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-H*3621(RGJF-06?MCK?)	28,800 [8.4]	20,650 [6.1]	8,150 [2.4]	13.00	15.50	76	925 [437]
	RCFL-H*3621(RGJF-07?MCK?)	28,400 [8.3]	20,050 [5.9]	8,350 [2.4]	13.00	15.50	76	875 [413]
	RCFL-H*3621(RGJF-09?ZCM?)	29,200 [8.6]	21,350 [6.3]	7,850 [2.3]	13.00	15.50	76	1,025 [484]
	RCFL-H*3621(RGJF-10?ZCM?)	29,200 [8.6]	21,450 [6.3]	7,750 [2.3]	13.00	15.50	76	1,050 [495]
	RCFL-H*3621(RGLE-07?AMK?)	29,200 [8.6]	21,350 [6.3]	7,850 [2.3]	13.00	15.50	76	1,025 [484]
	RCFL-H*3621(RGLE-07?BRQ?)	29,000 [8.5]	20,850 [6.1]	8,150 [2.4]	13.00	16.00	76	925 [437]
	RCFL-H*3621(RGLT-10?BRM?)	29,400 [8.6]	21,600 [6.3]	7,800 [2.3]	13.00	16.00	76	1,050 [495]
	RCFL-H*3621(RGLT-07?AMK?)	28,600 [8.4]	20,200 [5.9]	8,400 [2.5]	13.00	16.00	76	875 [413]
	RCFL-H*3621(RGLT-07?BRQ?)	28,800 [8.4]	20,650 [6.1]	8,150 [2.4]	13.00	16.00	76	975 [460]
	RCFL-H*3621(RGLT-10?BRM?)	29,000 [8.5]	20,850 [6.1]	8,150 [2.4]	13.00	16.00	76	975 [460]
	RCFL-H*3621(RGPE-05?BMK?)	28,600 [8.4]	20,300 [5.9]	8,300 [2.4]	13.00	15.50	76	900 [425]
	RCFL-H*3621(RGPE-07?AMK?)	29,000 [8.5]	21,100 [6.2]	7,900 [2.3]	13.00	15.50	76	1,000 [472]
	RCFL-H*3621(RGPE-07?BRQ?)	29,200 [8.6]	21,300 [6.2]	7,900 [2.3]	13.00	16.00	76	1,025 [484]
	RCFL-H*3621(RGPE-10?BRM?)	28,800 [8.4]	20,450 [6.0]	8,350 [2.4]	13.00	16.00	76	900 [425]
	RCFL-H*3621(RGPT-05?BMK?)	28,400 [8.3]	20,000 [5.9]	8,400 [2.5]	13.00	15.50	76	875 [413]
	RCFL-H*3621(RGPT-07?AMK?)	28,600 [8.4]	20,200 [5.9]	8,400 [2.5]	13.00	15.50	76	875 [413]
	RCFL-H*3621(RGPT-07?BRQ?)	29,000 [8.5]	20,850 [6.1]	8,150 [2.4]	13.00	16.00	76	975 [460]
	RCFL-H*3621(RGRM-04?MAE?)	28,800 [8.4]	21,050 [6.2]	7,750 [2.3]	12.00	14.50	76	1,025 [484]
	RCFL-H*3621(RGRM-06?MAE?)	28,200 [8.3]	19,650 [5.8]	8,550 [2.5]	12.50	15.10	76	825 [389]
	RCFL-H*3621							

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*3821(RGFE-06?MCK?)	29,000 [8.5]	20,850 [6.1]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGFE-07?MCK?)	29,000 [8.5]	20,650 [6.1]	8,350 [2.4]	13.00	16.00	76	825 [389]
	RCFL-H*3821(RGFE-09?ZCM?)	29,200 [8.6]	21,000 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGFE-10?ZCM?)	29,400 [8.6]	21,300 [6.2]	8,100 [2.4]	13.00	16.00	76	900 [425]
30	RCFL-H*3821(RGFG-06?MCK?)	29,200 [8.6]	21,050 [6.2]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGFG-07?MCK?)	29,000 [8.5]	20,750 [6.1]	8,250 [2.4]	13.00	16.00	76	850 [401]
	RCFL-H*3821(RGFG-09?ZCM?)	29,200 [8.6]	21,000 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGFG-10?ZCM?)	29,400 [8.6]	21,300 [6.2]	8,100 [2.4]	13.00	16.00	76	900 [425]
	RCFL-H*3821(RGGE-06?MCK?)	29,000 [8.5]	20,650 [6.1]	8,350 [2.4]	13.00	16.00	76	825 [389]
	RCFL-H*3821(RGGE-07?MCK?)	29,200 [8.6]	21,050 [6.2]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGGE-09?ZCM?)	29,200 [8.6]	21,000 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGGE-10?ZCM?)	29,200 [8.6]	21,000 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGJF-06?MCK?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	925 [437]
	RCFL-H*3821(RGJF-07?MCK?)	29,200 [8.6]	21,050 [6.2]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGJF-09?ZCM?)	29,200 [8.6]	21,000 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGJF-10?ZCM?)	29,200 [8.6]	21,000 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGLE-07?AMK?)	29,200 [8.6]	21,050 [6.2]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGLE-07?BRQ?)	29,800 [8.7]	21,850 [6.4]	7,950 [2.3]	13.00	16.00	76	925 [437]
	RCFL-H*3821(RGLE-10?BRM?)	29,400 [8.6]	21,200 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGLT-07?AMK?)	29,600 [8.7]	21,650 [6.3]	7,950 [2.3]	13.00	16.00	76	925 [437]
	RCFL-H*3821(RGLT-07?BRQ?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3821(RGLT-10?BRM?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3821(RGPE-05?BMK?)	29,200 [8.6]	21,150 [6.2]	8,050 [2.4]	13.00	16.00	76	900 [425]
	RCFL-H*3821(RGPE-07?AMK?)	29,000 [8.5]	20,650 [6.1]	8,350 [2.4]	13.00	16.00	76	825 [389]
	RCFL-H*3821(RGPE-07?BRQ?)	29,400 [8.6]	21,300 [6.2]	8,100 [2.4]	13.00	16.00	76	900 [425]
	RCFL-H*3821(RGPE-10?BRM?)	29,400 [8.6]	21,300 [6.2]	8,100 [2.4]	13.00	16.00	76	900 [425]
	RCFL-H*3821(RGPT-05?BMK?)	29,200 [8.6]	21,100 [6.2]	8,100 [2.4]	13.00	16.00	76	900 [425]
	RCFL-H*3821(RGPT-07?AMK?)	29,600 [8.7]	21,650 [6.3]	7,950 [2.3]	13.00	16.00	76	925 [437]
	RCFL-H*3821(RGPT-07?BRQ?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3821(RGPT-10?BRM?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3821(RGRM-04?MAE?)	29,400 [8.6]	21,550 [6.3]	7,850 [2.3]	13.00	15.50	76	925 [437]
	RCFL-H*3821(RGRM-06?MAE?)	28,800 [8.4]	20,450 [6.0]	8,350 [2.4]	13.00	16.00	76	825 [389]
	RCFL-H*3821(RGRM-07?MAE?)	29,000 [8.5]	20,800 [6.1]	8,200 [2.4]	13.00	15.50	76	850 [401]
	RCFL-H*3821(RGRM-07?YBG?)	28,800 [8.4]	20,600 [6.0]	8,200 [2.4]	13.00	15.50	76	850 [401]
	RCFL-H*3821(RGRM-09?ZAJ?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	950 [448]
	RCFL-H*3821(RGRM-10?ZAJ?)	29,200 [8.6]	21,050 [6.2]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3821(RGTM-06?MAE?)	29,400 [8.6]	21,300 [6.2]	8,100 [2.4]	13.00	16.00	76	900 [425]
	RCFL-H*3821(RGTM-07?RBG?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	950 [448]
	RCFL-H*3821(RGTM-09?ZAJ?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3821(RHWP-04WMX36A)	30,200 [8.8]	22,900 [6.7]	7,300 [2.1]	13.00	16.00	76	1,075 [507]
	RCFL-H*3821(RHWP-06WMX48A)	29,800 [8.7]	22,300 [6.5]	7,500 [2.2]	13.00	16.00	76	1,000 [472]
	RCFL-H*3821(ROCA-070E03)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3821(ROCA-070E04)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3821(ROLA-070E03)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3821(ROLA-070E04)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3821(ROLA-115E05)	30,000 [8.8]	22,450 [6.6]	7,550 [2.2]	13.00	16.00	76	1,050 [495]
	RCFL-H*3821+RXMD-C04	29,000 [8.5]	21,250 [6.2]	7,750 [2.3]	12.00	14.50	76	950 [448]
	RCFL-H*3824(RGFE-09?ZCM?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3824(RGFE-10?ZCM?)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(RGFE-12?RCM?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions



Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*3824(RGFG-09?ZCM?)	29,200 [8.6]	21,000 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3824(RGFG-10?ZCM?)	29,400 [8.6]	21,300 [6.2]	8,100 [2.4]	13.00	16.00	76	900 [425]
	RCFL-H*3824(RGFG-12?RCM?)	29,400 [8.6]	21,200 [6.2]	8,200 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3824(RGGE-09?ZCM?)	29,800 [8.7]	22,050 [6.5]	7,750 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(RGGE-10?ZCM?)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(RGGE-12?RCM?)	30,000 [8.8]	22,250 [6.5]	7,750 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(RGJF-09?ZCM?)	29,800 [8.7]	22,050 [6.5]	7,750 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(RGJF-10?ZCM?)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(RGJF-12?RCM?)	30,000 [8.8]	22,250 [6.5]	7,750 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(RGLE-07?BRQ?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3824(RGLE-10?BRM?)	30,200 [8.8]	22,650 [6.6]	7,550 [2.2]	13.00	16.00	76	1,050 [495]
	RCFL-H*3824(RGLE-12?ARM?)	29,800 [8.7]	21,850 [6.4]	7,950 [2.3]	13.00	16.00	76	925 [437]
	RCFL-H*3824(RGLT-07?BRQ?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3824(RGLT-10?BRM?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3824(RGLT-12?ARM?)	29,800 [8.7]	21,850 [6.4]	7,950 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3824(RGPE-07?BRQ?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3824(RGPE-10?BRM?)	30,200 [8.8]	22,750 [6.7]	7,450 [2.2]	13.00	16.00	76	1,075 [507]
	RCFL-H*3824(RGPE-12?ARM?)	30,400 [8.9]	22,950 [6.7]	7,450 [2.2]	13.00	16.00	76	1,075 [507]
	RCFL-H*3824(RGPT-07?BRQ?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3824(RGPT-10?BRM?)	30,000 [8.8]	22,350 [6.5]	7,650 [2.2]	13.00	16.00	76	1,025 [484]
	RCFL-H*3824(RGPT-12?ARM?)	29,800 [8.7]	21,850 [6.4]	7,950 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3824(RGRM-07?YBG?)	28,800 [8.4]	20,600 [6.0]	8,200 [2.4]	13.00	15.50	76	850 [401]
	RCFL-H*3824(RGRM-09?ZAJ?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	950 [448]
	RCFL-H*3824(RGRM-10?ZAJ?)	29,200 [8.6]	21,050 [6.2]	8,150 [2.4]	13.00	16.00	76	875 [413]
	RCFL-H*3824(RGRM-12?RAJ?)	29,600 [8.7]	21,650 [6.3]	7,950 [2.3]	13.00	16.00	76	925 [437]
	RCFL-H*3824(RGTM-07?RBG?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	950 [448]
	RCFL-H*3824(RGTM-09?ZAJ?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3824(RGTM-10?RBJ?)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3824(ROCA-070E03)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(ROCA-070E04)	29,800 [8.7]	22,100 [6.5]	7,700 [2.3]	13.00	16.00	76	1,000 [472]
	RCFL-H*3824(ROLA-070E03)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3824(ROLA-070E04)	29,600 [8.7]	21,700 [6.4]	7,900 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3824(ROLA-115E05)	30,000 [8.8]	22,450 [6.6]	7,550 [2.2]	13.00	16.00	76	1,050 [495]
30	RBHP-21(RCHL-36A1)	28,600 [8.4]	20,400 [6.0]	8,200 [2.4]	13.00	16.00	76	1,000 [472]
	RCQD-3621(RGFE-06?MCK?)	29,000 [8.5]	21,150 [6.2]	7,850 [2.3]	13.00	16.00	76	875 [413]
	RCQD-3621(RGFE-07?MCK?)	29,000 [8.5]	20,950 [6.1]	8,050 [2.4]	13.00	16.00	76	825 [389]
	RCQD-3621(RGFE-09?ZCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	975 [460]
	RCQD-3621(RGFE-10?ZCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3621(RGFG-06?MCK?)	29,400 [8.6]	21,700 [6.4]	7,700 [2.3]	13.00	16.00	76	875 [413]
	RCQD-3621(RGFG-07?MCK?)	29,400 [8.6]	21,600 [6.3]	7,800 [2.3]	13.00	16.00	76	850 [401]
	RCQD-3621(RGFG-09?ZCM?)	29,600 [8.7]	21,850 [6.4]	7,750 [2.3]	13.00	16.00	76	875 [413]
	RCQD-3621(RGFG-10?ZCM?)	29,600 [8.7]	21,950 [6.4]	7,650 [2.2]	13.00	16.00	76	900 [425]
	RCQD-3621(RGJF-06?MCK?)	29,000 [8.5]	20,900 [6.1]	8,100 [2.4]	13.00	16.00	76	825 [389]
	RCQD-3621(RGJF-07?MCK?)	29,000 [8.5]	21,150 [6.2]	7,850 [2.3]	13.00	16.00	76	875 [413]
	RCQD-3621(RGJF-09?ZCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3621(RGJF-10?ZCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3621(RGPE-05?BMK?)	29,200 [8.6]	21,400 [6.3]	7,800 [2.3]	13.00	16.00	76	900 [425]
	RCQD-3621(RGPE-07?AMK?)	29,000 [8.5]	20,900 [6.1]	8,100 [2.4]	13.00	16.00	76	825 [389]
	RCQD-3621(RGPE-07?BRQ?)	29,400 [8.6]	21,550 [6.3]	7,850 [2.3]	13.00	16.00	76	900 [425]
	RCQD-3621(RGPE-10?BRM?)	29,400 [8.6]	21,550 [6.3]	7,850 [2.3]	13.00	16.00	76	900 [425]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCQD-3621(RGPT-05?BMK?)	29,200 [8.6]	21,400 [6.3]	7,800 [2.3]	13.00	16.00	76	900 [425]
	RCQD-3621(RGPT-07?AMK?)	29,400 [8.6]	21,700 [6.4]	7,700 [2.3]	13.00	16.00	76	925 [437]
	RCQD-3621(RGPT-07?BRQ?)	30,200 [8.8]	22,900 [6.7]	7,300 [2.1]	13.00	16.00	76	1,050 [495]
	RCQD-3621(RGPT-10?BRM?)	30,200 [8.8]	22,950 [6.7]	7,250 [2.1]	13.00	16.00	76	1,050 [495]
	RCQD-3621(RGRM-04?MAE?)	29,200 [8.6]	21,550 [6.3]	7,650 [2.2]	13.00	15.50	76	925 [437]
	RCQD-3621(RGRM-06?MAE?)	29,000 [8.5]	20,950 [6.1]	8,050 [2.4]	13.00	16.00	76	825 [389]
	RCQD-3621(RGRM-07?MAE?)	29,000 [8.5]	21,050 [6.2]	7,950 [2.3]	13.00	15.50	76	850 [401]
	RCQD-3621(RGRM-07?YBG?)	28,800 [8.4]	20,850 [6.1]	7,950 [2.3]	13.00	15.50	76	850 [401]
	RCQD-3621(RGRM-09?ZAJ?)	29,400 [8.6]	21,800 [6.4]	7,600 [2.2]	13.00	16.00	76	950 [448]
	RCQD-3621(RGRM-10?ZAJ?)	29,200 [8.6]	21,300 [6.2]	7,900 [2.3]	13.00	16.00	76	875 [413]
	RCQD-3621(RHWP-04WMX36A)	30,400 [8.9]	23,600 [6.9]	6,800 [2.0]	13.00	16.00	76	1,075 [507]
	RCQD-3621(RHWP-06WMX48A)	30,200 [8.8]	23,200 [6.8]	7,000 [2.1]	13.00	16.00	76	1,000 [472]
	RCQD-3621(ROCA-070E03)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3621(ROCA-070E04)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3621(ROLA-070E03)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	975 [460]
	RCQD-3621(ROLA-070E04)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,025 [484]
	RCQD-3621(ROLA-115E05)	30,000 [8.8]	22,750 [6.7]	7,250 [2.1]	13.00	16.00	76	1,050 [495]
	RCQD-3621+RXMD-C04	29,000 [8.5]	21,750 [6.4]	7,250 [2.1]	12.00	14.50	76	1,000 [472]
	RCQD-3624(RGFE-09?ZCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	975 [460]
	RCQD-3624(RGFE-10?ZCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3624(RGFE-12?RCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	975 [460]
	RCQD-3624(RGFG-09?ZCM?)	29,600 [8.7]	21,850 [6.4]	7,750 [2.3]	13.00	16.00	76	875 [413]
	RCQD-3624(RGFG-10?ZCM?)	29,600 [8.7]	21,950 [6.4]	7,650 [2.2]	13.00	16.00	76	900 [425]
	RCQD-3624(RGFG-12?RCM?)	29,600 [8.7]	21,850 [6.4]	7,750 [2.3]	13.00	16.00	76	875 [413]
	RCQD-3624(RGJF-09?ZCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3624(RGJF-10?ZCM?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3624(RGJF-12?RCM?)	30,000 [8.8]	22,550 [6.6]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3624(RGPE-07?BRQ?)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,025 [484]
	RCQD-3624(RGPE-10?BRM?)	30,200 [8.8]	23,000 [6.7]	7,200 [2.1]	13.00	16.00	76	1,075 [507]
	RCQD-3624(RGPE-12?ARM?)	30,200 [8.8]	23,000 [6.7]	7,200 [2.1]	13.00	16.00	76	1,075 [507]
	RCQD-3624(RGPT-07?BRQ?)	30,200 [8.8]	22,900 [6.7]	7,300 [2.1]	13.00	16.00	76	1,050 [495]
	RCQD-3624(RGPT-10?BRM?)	30,200 [8.8]	23,000 [6.7]	7,200 [2.1]	13.00	16.00	76	1,075 [507]
	RCQD-3624(RGPT-12?ARM?)	30,000 [8.8]	22,500 [6.6]	7,500 [2.2]	13.00	16.00	76	975 [460]
	RCQD-3624(RGRM-07?YBG?)	28,800 [8.4]	20,850 [6.1]	7,950 [2.3]	13.00	15.50	76	850 [401]
	RCQD-3624(RGRM-09?ZAJ?)	29,600 [8.7]	22,000 [6.4]	7,600 [2.2]	13.00	16.00	76	950 [448]
	RCQD-3624(RGRM-10?ZAJ?)	29,200 [8.6]	21,300 [6.2]	7,900 [2.3]	13.00	16.00	76	875 [413]
	RCQD-3624(RGRM-12?RAJ?)	29,600 [8.7]	21,850 [6.4]	7,750 [2.3]	13.00	16.00	76	925 [437]
	RCQD-3624(ROCA-070E03)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3624(ROCA-070E04)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	1,000 [472]
	RCQD-3624(ROLA-070E03)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	975 [460]
	RCQD-3624(ROLA-070E04)	29,800 [8.7]	22,350 [6.5]	7,450 [2.2]	13.00	16.00	76	975 [460]
	RCQD-3624(ROLA-115E05)	29,400 [8.6]	21,600 [6.3]	7,800 [2.3]	13.00	16.00	76	900 [425]
	RCQD-3624+RXMD-C04	29,000 [8.5]	21,750 [6.4]	7,250 [2.1]	12.00	14.50	76	1,000 [472]
36	RHKL-HM3617(RCSL-H*3617)	29,200 [8.6]	21,350 [6.3]	7,850 [2.3]	13.00	15.50	76	1,025 [484]
	RHLL-HM3617(RCSL-H*3617)	29,200 [8.6]	21,250 [6.2]	7,950 [2.3]	13.00	16.00	76	1,000 [472]
	RHSL-HM3017(RCSL-H*3617)	28,400 [8.3]	20,400 [6.0]	8,000 [2.3]	12.00	14.50	76	950 [448]
	RHKL-HM3821(RCSL-H*3821)	30,000 [8.8]	22,250 [6.5]	7,750 [2.3]	13.00	16.00	76	1,000 [472]
	RHLL-HM3821(RCSL-H*3821)	29,600 [8.7]	21,650 [6.3]	7,950 [2.3]	13.00	16.00	76	975 [460]
	RCFL-H*3617+RXMD-C04 ①	35,000 [10.3]	24,350 [7.1]	10,650 [3.1]	12.00	14.50	77	1,075 [507]
	RHAL-FR36P	36,000 [10.5]	26,600 [7.8]	9,400 [2.8]	12.00	14.50	77	1,200 [566]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

36

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-A*3621(RGRM-10?ZAJ?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-A*3621(RHWP-04WMX36A)	35,200 [10.3]	24,300 [7.1]	10,900 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-A*3621(RHWP-06WMX48A)	35,800 [10.5]	25,600 [7.5]	10,200 [3.0]	12.50	15.00	77	1,175 [554]
	RCFL-A*3621(ROCA-070E03)	35,200 [10.3]	24,050 [7.0]	11,150 [3.3]	12.50	15.10	77	1,000 [472]
	RCFL-A*3621(ROCA-070E04)	35,200 [10.3]	24,050 [7.0]	11,150 [3.3]	12.50	15.10	77	1,000 [472]
	RCFL-A*3621(ROLA-070E03)	36,000 [10.5]	25,650 [7.5]	10,350 [3.0]	12.50	15.10	77	1,175 [554]
	RCFL-A*3621(ROLA-070E04)	35,400 [10.4]	24,350 [7.1]	11,050 [3.2]	13.00	15.50	77	1,025 [484]
	RCFL-A*3621(ROLA-115E05)	35,600 [10.4]	24,750 [7.3]	10,850 [3.2]	13.00	15.50	77	1,050 [495]
	RCFL-A*3621+RXMD-C04	35,000 [10.3]	24,400 [7.1]	10,700 [3.1]	12.00	14.50	77	1,075 [507]
	RCFL-A*3821(RGFG-06?MCK?)	37,800 [11.1]	28,450 [8.3]	9,350 [2.7]	12.50	15.10	77	1,200 [566]
	RCFL-A*3821(RGFG-07?MCK?)	37,800 [11.1]	28,600 [8.4]	9,200 [2.7]	12.50	15.10	77	1,225 [578]
	RCFL-A*3821(RGFG-09?ZCM?)	38,000 [11.1]	28,550 [8.4]	9,450 [2.8]	13.00	16.00	77	1,200 [566]
	RCFL-A*3821(RGFG-10?ZCM?)	38,000 [11.1]	28,550 [8.4]	9,450 [2.8]	13.00	16.00	77	1,200 [566]
	RCFL-A*3821(RGLT-07?AMK?)	37,200 [10.9]	26,550 [7.8]	10,650 [3.1]	13.00	16.00	77	1,100 [519]
	RCFL-A*3821(RGLT-07?BRQ?)	37,800 [11.1]	27,850 [8.2]	9,950 [2.9]	13.00	16.00	77	1,250 [590]
	RCFL-A*3821(RGLT-10?BRM?)	38,000 [11.1]	28,050 [8.2]	9,950 [2.9]	13.00	16.00	77	1,250 [590]
	RCFL-A*3821(RGPT-05?BMK?)	37,000 [10.8]	26,400 [7.7]	10,600 [3.1]	13.00	15.50	77	1,100 [519]
	RCFL-A*3821(RGPT-07?AMK?)	37,000 [10.8]	26,350 [7.7]	10,650 [3.1]	13.00	15.50	77	1,100 [519]
	RCFL-A*3821(RGPT-07?BRQ?)	37,000 [10.8]	26,000 [7.6]	11,000 [3.2]	13.00	16.00	77	1,050 [495]
	RCFL-A*3821(RGPT-10?BRM?)	37,800 [11.1]	27,650 [8.1]	10,150 [3.0]	13.00	16.00	77	1,225 [578]
	RCFL-A*3821(ROCA-070E03)	37,600 [11.0]	27,550 [8.1]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-A*3821(ROCA-070E04)	37,600 [11.0]	27,550 [8.1]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-A*3821(ROLA-070E03)	37,400 [11.0]	27,100 [7.9]	10,300 [3.0]	13.00	15.50	77	1,175 [554]
	RCFL-A*3821(ROLA-070E04)	37,400 [11.0]	27,100 [7.9]	10,300 [3.0]	13.00	15.50	77	1,175 [554]
	RCFL-A*3821(ROLA-115E05)	37,800 [11.1]	27,700 [8.1]	10,100 [3.0]	13.00	16.00	77	1,200 [566]
	RCFL-A*3824(RGFG-09?ZCM?)	38,000 [11.1]	28,550 [8.4]	9,450 [2.8]	13.00	16.00	77	1,200 [566]
	RCFL-A*3824(RGFG-10?ZCM?)	38,000 [11.1]	28,550 [8.4]	9,450 [2.8]	13.00	16.00	77	1,200 [566]
	RCFL-A*3824(RGFG-12?RCM?)	38,500 [11.3]	29,150 [8.5]	9,350 [2.7]	13.00	16.00	77	1,225 [578]
	RCFL-A*3824(RGLT-07?BRQ?)	37,800 [11.1]	27,850 [8.2]	9,950 [2.9]	13.00	16.00	77	1,250 [590]
	RCFL-A*3824(RGLT-10?BRM?)	38,000 [11.1]	28,050 [8.2]	9,950 [2.9]	13.00	16.00	77	1,250 [590]
	RCFL-A*3824(RGLT-12?ARM?)	37,600 [11.0]	27,100 [7.9]	10,500 [3.1]	13.00	16.00	77	1,150 [543]
	RCFL-A*3824(RGPT-07?BRQ?)	37,000 [10.8]	26,000 [7.6]	11,000 [3.2]	13.00	16.00	77	1,050 [495]
	RCFL-A*3824(RGPT-10?BRM?)	37,800 [11.1]	27,700 [8.1]	10,100 [3.0]	13.00	16.00	77	1,225 [578]
	RCFL-A*3824(RGPT-12?ARM?)	37,600 [11.0]	27,250 [8.0]	10,350 [3.0]	13.00	16.00	77	1,175 [554]
	RCFL-A*3824(ROCA-070E03)	37,400 [11.0]	27,350 [8.0]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-A*3824(ROCA-070E04)	37,400 [11.0]	27,350 [8.0]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-A*3824(ROLA-070E03)	37,400 [11.0]	27,100 [7.9]	10,300 [3.0]	13.00	15.50	77	1,175 [554]
	RCFL-A*3824(ROLA-070E04)	37,400 [11.0]	27,100 [7.9]	10,300 [3.0]	13.00	15.50	77	1,175 [554]
	RCFL-A*3824(ROLA-115E05)	37,800 [11.1]	27,700 [8.1]	10,100 [3.0]	13.00	16.00	77	1,200 [566]
	RCFL-H*3617(RGFE-06?MCK?)	35,000 [10.3]	23,950 [7.0]	11,050 [3.2]	12.50	15.00	77	1,000 [472]
	RCFL-H*3617(RGFE-07?MCK?)	35,000 [10.3]	24,050 [7.0]	10,950 [3.2]	12.50	14.50	77	1,025 [484]
	RCFL-H*3617(RGFG-06?MCK?)	35,000 [10.3]	23,800 [7.0]	11,200 [3.3]	12.50	15.00	77	1,000 [472]
	RCFL-H*3617(RGFG-07?MCK?)	34,800 [10.2]	23,800 [7.0]	11,000 [3.2]	12.00	14.50	77	1,000 [472]
	RCFL-H*3617(RGGE-06?MCK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3617(RGGE-07?MCK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3617(RGJF-06?MCK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3617(RGJF-07?MCK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3617(RGLE-07?AMK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	13.00	15.10	77	1,025 [484]
	RCFL-H*3617(RGLT-07?AMK?)	35,600 [10.4]	24,800 [7.3]	10,800 [3.2]	12.50	15.10	77	1,050 [495]
	RCFL-H*3617(RGPE-07?AMK?)	35,000 [10.3]	23,900 [7.0]	11,100 [3.3]	12.50	15.10	77	1,000 [472]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*3617(RGPT-05?BMK?)	35,400 [10.4]	24,650 [7.2]	10,750 [3.1]	12.50	15.00	77	1,050 [495]
	RCFL-H*3617(RGPT-07?AMK?)	35,400 [10.4]	24,600 [7.2]	10,800 [3.2]	12.50	15.10	77	1,050 [495]
	RCFL-H*3617(RGRM-04?MAE?)	35,000 [10.3]	24,050 [7.0]	10,950 [3.2]	12.00	14.50	77	1,025 [484]
	RCFL-H*3617(RGRM-06?MAE?)	35,000 [10.3]	23,950 [7.0]	11,050 [3.2]	12.00	14.50	77	1,000 [472]
	RCFL-H*3617(RGTM-06?MAE?)	35,400 [10.4]	24,650 [7.2]	10,750 [3.1]	12.50	15.10	77	1,075 [507]
	RCFL-H*3617(RHWB-04WMX36A)	35,200 [10.3]	24,300 [7.1]	10,900 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3617(RHWB-06WMX48A)	35,600 [10.4]	25,300 [7.4]	10,300 [3.0]	12.00	14.50	77	1,150 [543]
	RCFL-H*3617(ROCA-070E03)	35,200 [10.3]	24,100 [7.1]	11,100 [3.3]	12.50	15.10	77	1,000 [472]
	RCFL-H*3617(ROCA-070E04)	35,200 [10.3]	24,100 [7.1]	11,100 [3.3]	12.50	15.10	77	1,000 [472]
	RCFL-H*3617(ROLA-070E03)	35,800 [10.5]	25,500 [7.5]	10,300 [3.0]	12.50	15.10	77	1,175 [554]
36	RCFL-H*3617(ROLA-070E04)	35,800 [10.5]	25,500 [7.5]	10,300 [3.0]	12.50	15.10	77	1,175 [554]
	RCFL-H*3621(RGFE-06?MCK?)	35,000 [10.3]	23,900 [7.0]	11,100 [3.3]	12.50	15.00	77	1,000 [472]
	RCFL-H*3621(RGFE-07?MCK?)	35,000 [10.3]	24,050 [7.0]	10,950 [3.2]	12.50	15.00	77	1,025 [484]
	RCFL-H*3621(RGFE-09?ZCM?)	36,000 [10.5]	25,800 [7.6]	10,200 [3.0]	12.50	14.50	77	1,200 [566]
	RCFL-H*3621(RGFE-10?ZCM?)	35,200 [10.3]	24,050 [7.0]	11,150 [3.3]	13.00	15.50	77	1,000 [472]
	RCFL-H*3621(RGFG-06?MCK?)	35,000 [10.3]	23,800 [7.0]	11,200 [3.3]	12.50	15.10	77	1,000 [472]
	RCFL-H*3621(RGFG-07?MCK?)	35,000 [10.3]	23,800 [7.0]	11,200 [3.3]	12.00	14.50	77	1,000 [472]
	RCFL-H*3621(RGFG-09?ZCM?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3621(RGFG-10?ZCM?)	35,200 [10.3]	24,000 [7.0]	11,200 [3.3]	12.50	15.10	77	1,000 [472]
	RCFL-H*3621(RGGE-06?MCK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3621(RGGE-07?MCK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3621(RGGE-09?ZCM?)	35,200 [10.3]	24,150 [7.1]	11,050 [3.2]	13.00	15.50	77	1,025 [484]
	RCFL-H*3621(RGGE-10?ZCM?)	35,600 [10.4]	24,800 [7.3]	10,800 [3.2]	13.00	15.50	77	1,050 [495]
	RCFL-H*3621(RGJF-06?MCK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3621(RGJF-07?MCK?)	35,200 [10.3]	24,200 [7.1]	11,000 [3.2]	12.50	15.10	77	1,025 [484]
	RCFL-H*3621(RGJF-09?ZCM?)	35,200 [10.3]	24,150 [7.1]	11,050 [3.2]	13.00	15.50	77	1,025 [484]
	RCFL-H*3621(RGJF-10?ZCM?)	35,600 [10.4]	24,800 [7.3]	10,800 [3.2]	13.00	15.50	77	1,050 [495]
	RCFL-H*3621(RGLE-07?AMK?)	35,200 [10.3]	24,150 [7.1]	11,050 [3.2]	13.00	15.50	77	1,025 [484]
	RCFL-H*3621(RGLE-07?BRQ?)	35,400 [10.4]	24,350 [7.1]	11,050 [3.2]	13.00	15.50	77	1,025 [484]
	RCFL-H*3621(RGLE-10?BRM?)	35,800 [10.5]	24,900 [7.3]	10,900 [3.2]	13.00	16.00	77	1,050 [495]
	RCFL-H*3621(RGLT-07?AMK?)	35,600 [10.4]	24,800 [7.3]	10,800 [3.2]	13.00	15.50	77	1,075 [507]
	RCFL-H*3621(RGLT-07?BRQ?)	36,200 [10.6]	25,950 [7.6]	10,250 [3.0]	12.50	15.10	77	1,200 [566]
	RCFL-H*3621(RGLT-10?BRM?)	36,000 [10.5]	25,650 [7.5]	10,350 [3.0]	13.00	15.50	77	1,175 [554]
	RCFL-H*3621(RGPE-05?BMK?)	35,800 [10.5]	25,650 [7.5]	10,150 [3.0]	12.00	14.50	77	1,200 [566]
	RCFL-H*362							

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*3621(ROCA-070E03)	35,200 [10.3]	24,050 [7.0]	11,150 [3.3]	12.50	15.10	77	1,000 [472]
	RCFL-H*3621(ROCA-070E04)	35,200 [10.3]	24,050 [7.0]	11,150 [3.3]	12.50	15.10	77	1,000 [472]
	RCFL-H*3621(ROLA-070E03)	36,000 [10.5]	25,650 [7.5]	10,350 [3.0]	12.50	15.10	77	1,175 [554]
	RCFL-H*3621(ROLA-070E04)	35,400 [10.4]	24,350 [7.1]	11,050 [3.2]	13.00	15.50	77	1,025 [484]
	RCFL-H*3621(ROLA-115E05)	35,600 [10.4]	24,750 [7.3]	10,850 [3.2]	13.00	15.50	77	1,050 [495]
	RCFL-H*3621+RXMD-C04	35,000 [10.3]	24,400 [7.1]	10,700 [3.1]	12.00	14.50	77	1,075 [507]
	RCFL-H*3821(RGFE-06?MCK?)	37,200 [10.9]	27,250 [8.0]	9,950 [2.9]	12.50	15.00	77	1,200 [566]
	RCFL-H*3821(RGFE-09?ZCM?)	37,600 [11.0]	27,550 [8.1]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-H*3821(RGFE-10?ZCM?)	37,400 [11.0]	27,350 [8.0]	10,050 [2.9]	13.00	15.50	77	1,225 [578]
	RCFL-H*3821(RGFG-06?MCK?)	37,800 [11.1]	28,450 [8.3]	9,350 [2.7]	12.50	15.10	77	1,200 [566]
	RCFL-H*3821(RGFG-07?MCK?)	37,800 [11.1]	28,600 [8.4]	9,200 [2.7]	12.50	15.10	77	1,225 [578]
	RCFL-H*3821(RGFG-09?ZCM?)	38,000 [11.1]	28,550 [8.4]	9,450 [2.8]	13.00	16.00	77	1,200 [566]
	RCFL-H*3821(RGFG-10?ZCM?)	38,000 [11.1]	28,550 [8.4]	9,450 [2.8]	13.00	16.00	77	1,200 [566]
	RCFL-H*3821(RGLT-07?AMK?)	37,200 [10.9]	26,550 [7.8]	10,650 [3.1]	13.00	16.00	77	1,100 [519]
	RCFL-H*3821(RGLT-07?BRQ?)	37,800 [11.1]	27,850 [8.2]	9,950 [2.9]	13.00	16.00	77	1,250 [590]
	RCFL-H*3821(RGLT-10?BRM?)	38,000 [11.1]	28,050 [8.2]	9,950 [2.9]	13.00	16.00	77	1,250 [590]
	RCFL-H*3821(RGPE-05?BMK?)	37,400 [11.0]	27,400 [8.0]	10,000 [2.9]	12.50	15.50	77	1,200 [566]
	RCFL-H*3821(RGPE-07?AMK?)	37,400 [11.0]	27,350 [8.0]	10,050 [2.9]	13.00	15.50	77	1,225 [578]
	RCFL-H*3821(RGPE-07?BRQ?)	37,800 [11.1]	27,700 [8.1]	10,100 [3.0]	13.00	16.00	77	1,225 [578]
	RCFL-H*3821(RGPE-10?BRM?)	37,800 [11.1]	27,700 [8.1]	10,100 [3.0]	13.00	16.00	77	1,225 [578]
	RCFL-H*3821(RGPT-05?BMK?)	37,000 [10.8]	26,400 [7.7]	10,600 [3.1]	13.00	15.50	77	1,100 [519]
	RCFL-H*3821(RGPT-07?AMK?)	37,000 [10.8]	26,350 [7.7]	10,650 [3.1]	13.00	15.50	77	1,100 [519]
	RCFL-H*3821(RGPT-07?BRQ?)	37,000 [10.8]	26,000 [7.6]	11,000 [3.2]	13.00	16.00	77	1,050 [495]
	RCFL-H*3821(RGPT-10?BRM?)	37,800 [11.1]	27,650 [8.1]	10,150 [3.0]	13.00	16.00	77	1,225 [578]
36	RCFL-H*3821(RGRM-07?YBG?)	36,600 [10.7]	25,800 [7.6]	10,800 [3.2]	12.50	15.10	77	1,050 [495]
	RCFL-H*3821(RGRM-09?ZAJ?)	36,800 [10.8]	26,050 [7.6]	10,750 [3.1]	13.00	16.00	77	1,075 [507]
	RCFL-H*3821(RGRM-10?ZAJ?)	37,200 [10.9]	26,850 [7.9]	10,350 [3.0]	13.00	15.50	77	1,150 [543]
	RCFL-H*3821(RHWP-04WMX36A)	38,500 [11.3]	29,300 [8.6]	9,200 [2.7]	13.00	16.00	77	1,200 [566]
	RCFL-H*3821(RHWP-06WMX48A)	38,000 [11.1]	28,800 [8.4]	9,200 [2.7]	13.00	16.00	77	1,200 [566]
	RCFL-H*3821(ROCA-070E03)	37,600 [11.0]	27,550 [8.1]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-H*3821(ROCA-070E04)	37,600 [11.0]	27,550 [8.1]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-H*3821(ROLA-070E03)	37,400 [11.0]	27,100 [7.9]	10,300 [3.0]	13.00	15.50	77	1,175 [554]
	RCFL-H*3821(ROLA-070E04)	37,400 [11.0]	27,100 [7.9]	10,300 [3.0]	13.00	15.50	77	1,175 [554]
	RCFL-H*3821(ROLA-115E05)	37,800 [11.1]	27,700 [8.1]	10,100 [3.0]	13.00	16.00	77	1,200 [566]
	RCFL-H*3821+RXMD-C04	36,800 [10.8]	26,950 [7.9]	9,850 [2.9]	12.00	15.00	77	1,220 [576]
	RCFL-H*3824(RGFE-09?ZCM?)	37,600 [11.0]	27,550 [8.1]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-H*3824(RGFE-10?ZCM?)	37,400 [11.0]	27,350 [8.0]	10,050 [2.9]	13.00	15.50	77	1,225 [578]
	RCFL-H*3824(RGFE-12?RCM?)	37,600 [11.0]	27,500 [8.1]	10,100 [3.0]	13.00	16.00	77	1,225 [578]
	RCFL-H*3824(RGFG-09?ZCM?)	38,000 [11.1]	28,550 [8.4]	9,450 [2.8]	13.00	16.00	77	1,200 [566]
	RCFL-H*3824(RGFG-10?ZCM?)	38,000 [11.1]	28,550 [8.4]	9,450 [2.8]	13.00	16.00	77	1,200 [566]
	RCFL-H*3824(RGFG-12?RCM?)	38,500 [11.3]	29,150 [8.5]	9,350 [2.7]	13.00	16.00	77	1,225 [578]
	RCFL-H*3824(RGGE-09?ZCM?)	37,600 [11.0]	27,500 [8.1]	10,100 [3.0]	13.00	16.00	77	1,225 [578]
	RCFL-H*3824(RGGE-10?ZCM?)	37,600 [11.0]	27,550 [8.1]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-H*3824(RGGE-12?RCM?)	37,800 [11.1]	27,700 [8.1]	10,100 [3.0]	13.00	16.00	77	1,200 [566]
	RCFL-H*3824(RGJF-09?ZCM?)	37,600 [11.0]	27,500 [8.1]	10,100 [3.0]	13.00	16.00	77	1,225 [578]
	RCFL-H*3824(RGJF-10?ZCM?)	37,600 [11.0]	27,550 [8.1]	10,050 [2.9]	13.00	15.50	77	1,200 [566]
	RCFL-H*3824(RGJF-12?RCM?)	37,800 [11.1]	27,650 [8.1]	10,150 [3.0]	13.00	16.00	77	1,200 [566]
	RCFL-H*3824(RGLE-07?BRQ?)	37,800 [11.1]	27,700 [8.1]	10,100 [3.0]	13.00	16.00	77	1,225 [578]
	RCFL-H*3824(RGLE-10?BRM?)	37,800 [11.1]	27,650 [8.1]	10,150 [3.0]	13.00	16.00	77	1,200 [566]
	RCFL-H*3824(RGLE-12?ARM?)	37,800 [11.1]	27,650 [8.1]	10,150 [3.0]	13.00	16.00	77	1,225 [578]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

36

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFN-H*3624(ROLA-070E03)	39,500 [11.6]	29,950 [8.8]	9,550 [2.8]	13.00	16.00	77	1,175 [554]
	RCFN-H*3624(ROLA-070E04)	39,500 [11.6]	29,950 [8.8]	9,550 [2.8]	13.00	16.00	77	1,175 [554]
	RCFN-H*3624(ROLA-115E05)	39,500 [11.6]	29,900 [8.8]	9,600 [2.8]	13.00	16.00	77	1,200 [566]
	RCFN-H*3624+RXMD-C04	38,500 [11.3]	29,150 [8.5]	9,350 [2.7]	12.50	15.00	77	1,200 [566]
	RBHP-21(RCHL-36A1)	35,800 [10.5]	24,850 [7.3]	10,950 [3.2]	13.00	15.00	77	1,200 [566]
	RCQD-3621(RGFE-06?MCK?)	37,000 [10.8]	27,200 [8.0]	9,800 [2.9]	12.50	15.00	77	1,200 [566]
	RCQD-3621(RGFE-09?ZCM?)	37,400 [11.0]	27,500 [8.1]	9,900 [2.9]	13.00	15.50	77	1,200 [566]
	RCQD-3621(RGFE-10?ZCM?)	37,400 [11.0]	27,500 [8.1]	9,900 [2.9]	13.00	15.50	77	1,225 [578]
	RCQD-3621(RGFG-06?MCK?)	37,600 [11.0]	28,400 [8.3]	9,200 [2.7]	12.50	15.10	77	1,200 [566]
	RCQD-3621(RGFG-07?MCK?)	37,800 [11.1]	28,750 [8.4]	9,050 [2.7]	12.50	15.00	77	1,225 [578]
36	RCQD-3621(RGFG-09?ZCM?)	38,000 [11.1]	28,700 [8.4]	9,300 [2.7]	13.00	16.00	77	1,200 [566]
	RCQD-3621(RGFG-10?ZCM?)	38,000 [11.1]	28,700 [8.4]	9,300 [2.7]	13.00	15.50	77	1,200 [566]
	RCQD-3621(RGJF-06?MCK?)	37,400 [11.0]	27,550 [8.1]	9,850 [2.9]	12.50	15.00	77	1,200 [566]
	RCQD-3621(RGJF-07?MCK?)	37,200 [10.9]	27,350 [8.0]	9,850 [2.9]	12.50	15.00	77	1,200 [566]
	RCQD-3621(RGJF-09?ZCM?)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	16.00	77	1,225 [578]
	RCQD-3621(RGJF-10?ZCM?)	37,600 [11.0]	27,700 [8.1]	9,900 [2.9]	13.00	15.50	77	1,200 [566]
	RCQD-3621(RGPE-05?BMK?)	37,200 [10.9]	27,350 [8.0]	9,850 [2.9]	12.50	15.00	77	1,200 [566]
	RCQD-3621(RGPE-07?AMK?)	37,400 [11.0]	27,500 [8.1]	9,900 [2.9]	12.50	15.00	77	1,225 [578]
	RCQD-3621(RGPE-07?BRQ?)	37,000 [10.8]	26,300 [7.7]	10,700 [3.1]	13.00	16.00	77	1,050 [495]
	RCQD-3621(RGPE-10?BRM?)	37,200 [10.9]	26,600 [7.8]	10,600 [3.1]	13.00	16.00	77	1,075 [507]
	RCQD-3621(RGPT-05?BMK?)	37,000 [10.8]	26,600 [7.8]	10,400 [3.0]	12.50	15.10	77	1,100 [519]
	RCQD-3621(RGPT-07?AMK?)	37,000 [10.8]	26,600 [7.8]	10,400 [3.0]	13.00	15.50	77	1,100 [519]
	RCQD-3621(RGPT-07?BRQ?)	37,200 [10.9]	26,450 [7.7]	10,750 [3.1]	13.00	16.00	77	1,050 [495]
	RCQD-3621(RGPT-10?BRM?)	38,000 [11.1]	28,250 [8.3]	9,750 [2.9]	13.00	16.00	77	1,250 [590]
	RCQD-3621(RGRM-07?YBG?)	36,600 [10.7]	26,000 [7.6]	10,600 [3.1]	12.50	15.00	77	1,050 [495]
	RCQD-3621(RGRM-09?ZAJ?)	37,000 [10.8]	26,450 [7.7]	10,550 [3.1]	13.00	15.50	77	1,075 [507]
	RCQD-3621(RGRM-10?ZAJ?)	37,200 [10.9]	27,050 [7.9]	10,150 [3.0]	13.00	15.50	77	1,150 [543]
	RCQD-3621(RHWB-04WMX36A)	38,000 [11.1]	28,900 [8.5]	9,100 [2.7]	13.00	16.00	77	1,200 [566]
	RCQD-3621(RHWB-06WMX48A)	38,000 [11.1]	29,000 [8.5]	9,000 [2.6]	13.00	16.00	77	1,225 [578]
	RCQD-3621(ROCA-070E03)	37,400 [11.0]	27,500 [8.1]	9,900 [2.9]	12.50	15.10	77	1,200 [566]
	RCQD-3621(ROCA-070E04)	37,400 [11.0]	27,500 [8.1]	9,900 [2.9]	12.50	15.10	77	1,200 [566]
	RCQD-3621(ROLA-070E03)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	15.50	77	1,175 [554]
	RCQD-3621(ROLA-070E04)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	15.50	77	1,175 [554]
	RCQD-3621(ROLA-115E05)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	16.00	77	1,200 [566]
	RCQD-3621+RXMD-C04	36,800 [10.8]	27,100 [7.9]	9,700 [2.8]	12.00	14.50	77	1,200 [566]
	RCQD-3624(RGFE-09?ZCM?)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	15.50	77	1,200 [566]
	RCQD-3624(RGFE-10?ZCM?)	37,400 [11.0]	27,500 [8.1]	9,900 [2.9]	13.00	15.50	77	1,225 [578]
	RCQD-3624(RGFE-12?RCM?)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	16.00	77	1,225 [578]
	RCQD-3624(RGFG-09?ZCM?)	38,000 [11.1]	28,700 [8.4]	9,300 [2.7]	13.00	16.00	77	1,200 [566]
	RCQD-3624(RGFG-10?ZCM?)	38,000 [11.1]	28,700 [8.4]	9,300 [2.7]	13.00	16.00	77	1,200 [566]
	RCQD-3624(RGFG-12?RCM?)	38,500 [11.3]	29,300 [8.6]	9,200 [2.7]	13.00	16.00	77	1,225 [578]
	RCQD-3624(RGJF-09?ZCM?)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	16.00	77	1,225 [578]
	RCQD-3624(RGJF-10?ZCM?)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	16.00	77	1,200 [566]
	RCQD-3624(RGJF-12?RCM?)	37,800 [11.1]	27,800 [8.1]	10,000 [2.9]	13.00	16.00	77	1,200 [566]
	RCQD-3624(RGPE-07?BRQ?)	37,000 [10.8]	26,250 [7.7]	10,750 [3.1]	13.00	16.00	77	1,050 [495]
	RCQD-3624(RGPE-10?BRM?)	37,200 [10.9]	26,600 [7.8]	10,600 [3.1]	13.00	16.00	77	1,075 [507]
RCQD-3624(RGPE-12?ARM?)	37,200 [10.9]	26,550 [7.8]	10,650 [3.1]	13.00	16.00	77	1,075 [507]	
RCQD-3624(RGPT-07?BRQ?)	37,200 [10.9]	26,450 [7.7]	10,750 [3.1]	13.00	16.00	77	1,050 [495]	
RCQD-3624(RGPT-10?BRM?)	37,200 [10.9]	26,550 [7.8]	10,650 [3.1]	13.00	16.00	77	1,075 [507]	
RCQD-3624(RGPT-12?ARM?)	37,800 [11.1]	27,800 [8.1]	10,000 [2.9]	13.00	16.00	77	1,225 [578]	

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12 36	RCQD-3624(RGRM-07?YBG?)	36,600 [10.7]	26,000 [7.6]	10,600 [3.1]	12.50	15.00	77	1,050 [495]
	RCQD-3624(RGRM-09?ZAJ?)	37,000 [10.8]	26,450 [7.7]	10,550 [3.1]	13.00	16.00	77	1,075 [507]
	RCQD-3624(RGRM-10?ZAJ?)	37,200 [10.9]	27,050 [7.9]	10,150 [3.0]	13.00	15.50	77	1,150 [543]
	RCQD-3624(RGRM-12?RAJ?)	37,000 [10.8]	26,400 [7.7]	10,600 [3.1]	13.00	16.00	77	1,075 [507]
	RCQD-3624(ROCA-070E03)	37,400 [11.0]	27,500 [8.1]	9,900 [2.9]	13.00	15.50	77	1,200 [566]
	RCQD-3624(ROCA-070E04)	37,400 [11.0]	27,500 [8.1]	9,900 [2.9]	13.00	15.50	77	1,200 [566]
	RCQD-3624(ROLA-070E03)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	16.00	77	1,175 [554]
	RCQD-3624(ROLA-070E04)	37,600 [11.0]	27,650 [8.1]	9,950 [2.9]	13.00	16.00	77	1,175 [554]
	RCQD-3624(ROLA-115E05)	37,800 [11.1]	27,800 [8.1]	10,000 [2.9]	13.00	16.00	77	1,200 [566]
	RCQD-3624+RXMD-C04	36,800 [10.8]	27,100 [7.9]	9,700 [2.8]	12.00	14.50	77	1,200 [566]
	RHKL-HM3617(RCSL-H*3617)	36,200 [10.6]	26,100 [7.6]	10,100 [3.0]	12.50	15.00	77	1,225 [578]
	RHLL-HM3617(RCSL-H*3617)	36,200 [10.6]	25,950 [7.6]	10,250 [3.0]	13.00	15.50	77	1,200 [566]
	RHSL-HM3617(RCSL-H*3617)	35,000 [10.3]	24,350 [7.1]	10,650 [3.1]	12.00	14.50	77	1,100 [519]
	RHSL-HM3621(RCSL-H*3621)	35,000 [10.3]	24,350 [7.1]	10,650 [3.1]	12.00	14.50	77	1,100 [519]
	RHKL-HM3821(RCSL-H*3821)	37,800 [11.1]	27,650 [8.1]	10,150 [3.0]	13.00	16.00	77	1,200 [566]
	RHLL-HM3821(RCSL-H*3821)	37,600 [11.0]	27,250 [8.0]	10,350 [3.0]	13.00	16.00	77	1,175 [554]
	RHPN-HM3624(RCSN-H*3624)	39,500 [11.6]	29,850 [8.7]	9,650 [2.8]	13.00	16.00	77	1,200 [566]
42	RCFL-H*4821+RXMD-C04 ①	40,500 [11.9]	29,750 [8.7]	10,750 [3.1]	12.00	14.50	77	1,425 [672]
	RCFL-A*3821(RGLT-07?AMK?)	40,000 [11.7]	28,850 [8.5]	11,150 [3.3]	12.00	14.50	77	1,350 [637]
	RCFL-A*3821(RGLT-07?BRQ?)	40,000 [11.7]	28,150 [8.2]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-A*3821(RGLT-10?BRM?)	40,500 [11.9]	28,650 [8.4]	11,850 [3.5]	13.00	15.50	77	1,250 [590]
	RCFL-A*3821(RGPT-05?BMK?)	39,500 [11.6]	27,650 [8.1]	11,850 [3.5]	12.00	14.50	77	1,225 [578]
	RCFL-A*3821(RGPT-07?AMK?)	40,000 [11.7]	28,250 [8.3]	11,750 [3.4]	12.00	14.50	77	1,250 [590]
	RCFL-A*3821(RGPT-07?BRQ?)	40,500 [11.9]	28,600 [8.4]	11,900 [3.5]	13.00	15.50	77	1,250 [590]
	RCFL-A*3821(RGPT-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*3821(ROCA-070E03)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-A*3821(ROCA-070E04)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-A*3821(ROLA-070E03)	40,000 [11.7]	27,750 [8.1]	12,250 [3.6]	12.50	15.00	77	1,175 [554]
	RCFL-A*3821(ROLA-070E04)	40,500 [11.9]	29,400 [8.6]	11,100 [3.3]	12.50	15.00	77	1,375 [649]
	RCFL-A*3821(ROLA-115E05)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-A*3824(RGLT-07?BRQ?)	40,000 [11.7]	28,150 [8.2]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-A*3824(RGLT-10?BRM?)	40,500 [11.9]	28,650 [8.4]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-A*3824(RGLT-12?ARM?)	41,000 [12.0]	29,850 [8.7]	11,150 [3.3]	12.50	15.50	77	1,375 [649]
	RCFL-A*3824(RGPT-07?BRQ?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*3824(RGPT-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*3824(RGPT-12?ARM?)	41,000 [12.0]	29,850 [8.7]	11,150 [3.3]	13.00	15.50	77	1,375 [649]
	RCFL-A*3824(ROCA-070E03)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-A*3824(ROCA-070E04)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-A*3824(ROLA-070E03)	40,000 [11.7]	27,750 [8.1]	12,250 [3.6]	12.50	15.00	77	1,175 [554]
	RCFL-A*3824(ROLA-070E04)	40,500 [11.9]	29,400 [8.6]	11,100 [3.3]	12.50	15.00	77	1,375 [649]
	RCFL-A*3824(ROLA-115E05)	40,500 [11.9]	29,700 [8.7]	10,800 [3.2]	12.50	15.00	77	1,400 [661]
	RCFL-A*4821(RGFE-09?ZCM?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-A*4821(RGFE-10?ZCM?)	40,000 [11.7]	28,100 [8.2]	11,900 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-A*4821(RGFG-09?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.10	77	1,200 [566]
	RCFL-A*4821(RGFG-10?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.00	77	1,200 [566]
	RCFL-A*4821(RGGE-06?MCK?)	39,500 [11.6]	27,500 [8.1]	12,000 [3.5]	12.00	14.50	77	1,200 [566]
	RCFL-A*4821(RGGE-07?MCK?)	39,500 [11.6]	27,500 [8.1]	12,000 [3.5]	12.00	14.50	77	1,200 [566]
	RCFL-A*4821(RGGE-09?ZCM?)	40,000 [11.7]	28,050 [8.2]	11,950 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-A*4821(RGGE-10?ZCM?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-A*4821(RGLE-07?AMK?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-A*4821(RGLE-10?BRM?)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-A*4821(RGLT-07?AMK?)	40,000 [11.7]	28,850 [8.5]	11,150 [3.3]	12.00	14.50	77	1,350 [637]
	RCFL-A*4821(RGLT-07?BRQ?)	40,000 [11.7]	28,150 [8.2]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-A*4821(RGLT-10?BRM?)	40,500 [11.9]	28,650 [8.4]	11,850 [3.5]	13.00	15.50	77	1,250 [590]
	RCFL-A*4821(RGPE-05?BMK?)	39,500 [11.6]	27,500 [8.1]	12,000 [3.5]	12.00	14.50	77	1,200 [566]
	RCFL-A*4821(RGPE-07?AMK?)	40,000 [11.7]	28,100 [8.2]	11,900 [3.5]	12.50	14.50	77	1,225 [578]
	RCFL-A*4821(RGPE-07?BRQ?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*4821(RGPE-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*4821(RGPT-05?BMK?)	39,500 [11.6]	27,650 [8.1]	11,850 [3.5]	12.00	14.50	77	1,225 [578]
	RCFL-A*4821(RGPT-07?AMK?)	40,000 [11.7]	28,250 [8.3]	11,750 [3.4]	12.00	14.50	77	1,250 [590]
	RCFL-A*4821(RGPT-07?BRQ?)	40,500 [11.9]	28,600 [8.4]	11,900 [3.5]	13.00	15.50	77	1,250 [590]
	RCFL-A*4821(RGPT-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*4821(RHWP-04WMX36A)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-A*4821(RHWP-06WMX48A)	40,000 [11.7]	28,700 [8.4]	11,300 [3.3]	12.00	14.50	77	1,325 [625]
	RCFL-A*4821(ROCA-070E03)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-A*4821(ROCA-070E04)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-A*4821(ROLA-070E03)	40,000 [11.7]	27,750 [8.1]	12,250 [3.6]	12.50	15.00	77	1,175 [554]
	RCFL-A*4821(ROLA-070E04)	40,500 [11.9]	29,400 [8.6]	11,100 [3.3]	12.50	15.00	77	1,375 [649]
	RCFL-A*4821(ROLA-115E05)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-A*4821+RXMD-C04	40,500 [11.9]	29,600 [8.7]	10,700 [3.1]	12.00	14.50	77	1,425 [672]
	RCFL-A*4824(RGFE-09?ZCM?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-A*4824(RGFE-10?ZCM?)	40,000 [11.7]	28,100 [8.2]	11,900 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-A*4824(RGFE-12?RCM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-A*4824(RGFG-09?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.10	77	1,200 [566]
	RCFL-A*4824(RGFG-10?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.00	77	1,200 [566]
	RCFL-A*4824(RGFG-12?RCM?)	40,000 [11.7]	28,200 [8.3]	11,800 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-A*4824(RGGE-09?ZCM?)	40,000 [11.7]	28,050 [8.2]	11,950 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-A*4824(RGGE-10?ZCM?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-A*4824(RGGE-12?RCM?)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-A*4824(RGLE-10?BRM?)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-A*4824(RGLE-12?ARM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*4824(RGLT-07?BRQ?)	40,000 [11.7]	28,150 [8.2]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-A*4824(RGLT-10?BRM?)	40,500 [11.9]	28,650 [8.4]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-A*4824(RGLT-12?ARM?)	41,000 [12.0]	29,850 [8.7]	11,150 [3.3]	12.50	15.50	77	1,375 [649]
	RCFL-A*4824(RGPE-07?BRQ?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*4824(RGPE-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*4824(RGPE-12?ARM?)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-A*4824(RGPT-07?BRQ?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*4824(RGPT-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-A*4824(RGPT-12?ARM?)	41,000 [12.0]	29,850 [8.7]	11,150 [3.3]	13.00	15.50	77	1,375 [649]
	RCFL-A*4824(RGTM-07?RBG?)	39,500 [11.6]	27,000 [7.9]	12,500 [3.7]	12.50	15.50	77	1,125 [531]
	RCFL-A*4824(RGTM-09?ZAJ?)	40,000 [11.7]	28,200 [8.3]	11,800 [3.5]	12.50	15.10	77	1,250 [590]
	RCFL-A*4824(RGTM-10?RBJ?)	39,500 [11.6]	26,950 [7.9]	12,550 [3.7]	13.00	15.50	77	1,125 [531]
	RCFL-A*4824(RHWP-08WRX60A)	40,500 [11.9]	29,300 [8.6]	11,200 [3.3]	13.00	15.50	77	1,350 [637]
	RCFL-A*4824(RHWP-10WRX60A)	41,000 [12.0]	30,300 [8.9]	10,700 [3.1]	13.00	15.50	77	1,400 [661]
	RCFL-A*4824(ROCA-070E03)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-A*4824(ROCA-070E04)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-A*4824(ROLA-070E03)	40,000 [11.7]	27,750 [8.1]	12,250 [3.6]	12.50	15.00	77	1,175 [554]
	RCFL-A*4824(ROLA-070E04)	40,500 [11.9]	29,400 [8.6]	11,100 [3.3]	12.50	15.00	77	1,375 [649]
	RCFL-A*4824(ROLA-115E05)	40,500 [11.9]	29,700 [8.7]	10,800 [3.2]	12.50	15.00	77	1,400 [661]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-A*4824+RXMD-C04	40,500 [11.9]	29,600 [8.7]	10,700 [3.1]	12.00	14.50	77	1,425 [672]
	RCFL-H*3821(RGFE-09?ZCM?)	40,000 [11.7]	28,650 [8.4]	11,350 [3.3]	12.50	15.10	77	1,200 [566]
	RCFL-H*3821(RGFE-10?ZCM?)	39,500 [11.6]	28,150 [8.2]	11,350 [3.3]	12.00	14.50	77	1,225 [578]
	RCFL-H*3821(RGFG-09?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.10	77	1,200 [566]
	RCFL-H*3821(RGFG-10?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.00	77	1,200 [566]
	RCFL-H*3821(RGGE-06?MCK?)	39,500 [11.6]	28,200 [8.3]	11,300 [3.3]	12.00	14.50	77	1,200 [566]
	RCFL-H*3821(RGGE-07?MCK?)	39,500 [11.6]	28,200 [8.3]	11,300 [3.3]	12.00	14.50	77	1,200 [566]
	RCFL-H*3821(RGGE-09?ZCM?)	40,000 [11.7]	28,650 [8.4]	11,350 [3.3]	12.50	15.10	77	1,225 [578]
	RCFL-H*3821(RGGE-10?ZCM?)	40,000 [11.7]	28,650 [8.4]	11,350 [3.3]	12.50	15.10	77	1,200 [566]
	RCFL-H*3821(RGJF-06?MCK?)	39,500 [11.6]	28,200 [8.3]	11,300 [3.3]	12.00	14.50	77	1,200 [566]
42	RCFL-H*3821(RGJF-07?MCK?)	39,500 [11.6]	28,200 [8.3]	11,300 [3.3]	12.00	14.50	77	1,200 [566]
	RCFL-H*3821(RGJF-09?ZCM?)	40,000 [11.7]	28,600 [8.4]	11,400 [3.3]	12.50	15.10	77	1,225 [578]
	RCFL-H*3821(RGJF-10?ZCM?)	40,000 [11.7]	28,650 [8.4]	11,350 [3.3]	12.50	15.10	77	1,200 [566]
	RCFL-H*3821(RGLE-07?AMK?)	39,500 [11.6]	28,150 [8.2]	11,350 [3.3]	12.00	14.50	77	1,200 [566]
	RCFL-H*3821(RGLE-07?BRQ?)	40,000 [11.7]	28,600 [8.4]	11,400 [3.3]	12.50	15.10	77	1,225 [578]
	RCFL-H*3821(RGLE-10?BRM?)	40,000 [11.7]	28,550 [8.4]	11,450 [3.4]	13.00	15.50	77	1,200 [566]
	RCFL-H*3821(RGLT-07?AMK?)	40,000 [11.7]	28,850 [8.5]	11,150 [3.3]	12.00	14.50	77	1,350 [637]
	RCFL-H*3821(RGLT-07?BRQ?)	40,000 [11.7]	28,150 [8.2]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-H*3821(RGLT-10?BRM?)	40,500 [11.9]	28,650 [8.4]	11,850 [3.5]	13.00	15.50	77	1,250 [590]
	RCFL-H*3821(RGPE-05?BMK?)	39,500 [11.6]	28,200 [8.3]	11,300 [3.3]	12.00	14.50	77	1,200 [566]
	RCFL-H*3821(RGPE-07?AMK?)	39,500 [11.6]	28,200 [8.3]	11,300 [3.3]	12.00	14.50	77	1,225 [578]
	RCFL-H*3821(RGPE-07?BRQ?)	40,000 [11.7]	28,600 [8.4]	11,400 [3.3]	12.50	15.50	77	1,225 [578]
	RCFL-H*3821(RGPE-10?BRM?)	40,000 [11.7]	28,600 [8.4]	11,400 [3.3]	12.50	15.50	77	1,225 [578]
	RCFL-H*3821(RGPT-05?BMK?)	39,500 [11.6]	27,650 [8.1]	11,850 [3.5]	12.00	14.50	77	1,225 [578]
	RCFL-H*3821(RGPT-07?AMK?)	40,000 [11.7]	28,250 [8.3]	11,750 [3.4]	12.00	14.50	77	1,250 [590]
	RCFL-H*3821(RGPT-07?BRQ?)	40,500 [11.9]	28,600 [8.4]	11,900 [3.5]	13.00	15.50	77	1,250 [590]
	RCFL-H*3821(RGPT-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*3821(RGRM-09?ZAJ?)	39,500 [11.6]	28,200 [8.3]	11,300 [3.3]	12.00	14.50	77	1,225 [578]
	RCFL-H*3821(RGRM-10?ZAJ?)	39,500 [11.6]	27,850 [8.2]	11,650 [3.4]	12.00	14.50	77	1,150 [543]
	RCFL-H*3821(RGTM-07?RBG?)	39,500 [11.6]	27,650 [8.1]	11,850 [3.5]	12.50	15.10	77	1,125 [531]
	RCFL-H*3821(RGTM-09?ZAJ?)	40,000 [11.7]	28,800 [8.4]	11,200 [3.3]	12.50	15.10	77	1,250 [590]
	RCFL-H*3821(ROCA-070E03)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-H*3821(ROCA-070E04)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-H*3821(ROLA-070E03)	40,000 [11.7]	27,750 [8.1]	12,250 [3.6]	12.50	15.00	77	1,175 [554]
	RCFL-H*3821(ROLA-0							

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*4821(RGFE-10?ZCM?)	40,000 [11.7]	28,100 [8.2]	11,900 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-H*4821(RGFG-09?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.10	77	1,200 [566]
	RCFL-H*4821(RGFG-10?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.00	77	1,200 [566]
	RCFL-H*4821(RGGE-06?MCK?)	39,500 [11.6]	27,500 [8.1]	12,000 [3.5]	12.00	14.50	77	1,200 [566]
	RCFL-H*4821(RGGE-07?MCK?)	39,500 [11.6]	27,500 [8.1]	12,000 [3.5]	12.00	14.50	77	1,200 [566]
	RCFL-H*4821(RGGE-09?ZCM?)	40,000 [11.7]	28,050 [8.2]	11,950 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-H*4821(RGGE-10?ZCM?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-H*4821(RGJF-06?MCK?)	39,500 [11.6]	27,500 [8.1]	12,000 [3.5]	12.00	14.50	77	1,200 [566]
	RCFL-H*4821(RGJF-07?MCK?)	39,500 [11.6]	27,500 [8.1]	12,000 [3.5]	12.00	14.50	77	1,200 [566]
	RCFL-H*4821(RGJF-09?ZCM?)	40,000 [11.7]	28,050 [8.2]	11,950 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-H*4821(RGJF-10?ZCM?)	40,000 [11.7]	27,900 [8.2]	12,100 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-H*4821(RGLE-07?AMK?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-H*4821(RGLE-10?BRM?)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-H*4821(RGLT-07?AMK?)	40,000 [11.7]	28,850 [8.5]	11,150 [3.3]	12.00	14.50	77	1,350 [637]
	RCFL-H*4821(RGLT-07?BRQ?)	40,000 [11.7]	28,150 [8.2]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-H*4821(RGLT-10?BRM?)	40,500 [11.9]	28,650 [8.4]	11,850 [3.5]	13.00	15.50	77	1,250 [590]
	RCFL-H*4821(RGPE-05?BMK?)	39,500 [11.6]	27,500 [8.1]	12,000 [3.5]	12.00	14.50	77	1,200 [566]
	RCFL-H*4821(RGPE-07?AMK?)	40,000 [11.7]	28,100 [8.2]	11,900 [3.5]	12.50	14.50	77	1,225 [578]
	RCFL-H*4821(RGPE-07?BRQ?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*4821(RGPE-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*4821(RGPT-05?BMK?)	39,500 [11.6]	27,650 [8.1]	11,850 [3.5]	12.00	14.50	77	1,225 [578]
	RCFL-H*4821(RGPT-07?AMK?)	40,000 [11.7]	28,250 [8.3]	11,750 [3.4]	12.00	14.50	77	1,250 [590]
	RCFL-H*4821(RGPT-07?BRQ?)	40,500 [11.9]	28,600 [8.4]	11,900 [3.5]	13.00	15.50	77	1,250 [590]
	RCFL-H*4821(RGPT-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*4821(RGRM-09?ZAJ?)	40,000 [11.7]	28,100 [8.2]	11,900 [3.5]	12.00	14.50	77	1,225 [578]
	RCFL-H*4821(RGRM-10?ZAJ?)	39,500 [11.6]	27,200 [8.0]	12,300 [3.6]	12.00	15.00	77	1,150 [543]
	RCFL-H*4821(RGTM-07?RBG?)	39,500 [11.6]	27,000 [7.9]	12,500 [3.7]	12.50	15.50	77	1,125 [531]
	RCFL-H*4821(RGTM-09?ZAJ?)	40,000 [11.7]	28,200 [8.3]	11,800 [3.5]	12.50	15.10	77	1,250 [590]
	RCFL-H*4821(RHWP-04WMX36A)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-H*4821(RHWP-06WMX48A)	40,000 [11.7]	28,700 [8.4]	11,300 [3.3]	12.00	14.50	77	1,325 [625]
	RCFL-H*4821(ROCA-070E03)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-H*4821(ROCA-070E04)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-H*4821(ROLA-070E03)	40,000 [11.7]	27,750 [8.1]	12,250 [3.6]	12.50	15.00	77	1,175 [554]
	RCFL-H*4821(ROLA-070E04)	40,500 [11.9]	29,400 [8.6]	11,100 [3.3]	12.50	15.00	77	1,375 [649]
	RCFL-H*4821(ROLA-115E05)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-H*4824(RGFE-09?ZCM?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-H*4824(RGFE-10?ZCM?)	40,000 [11.7]	28,100 [8.2]	11,900 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-H*4824(RGFE-12?RCM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-H*4824(RGFG-09?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.10	77	1,200 [566]
	RCFL-H*4824(RGFG-10?ZCM?)	40,000 [11.7]	27,800 [8.1]	12,200 [3.6]	12.50	15.00	77	1,200 [566]
	RCFL-H*4824(RGFG-12?RCM?)	40,000 [11.7]	28,200 [8.3]	11,800 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-H*4824(RGGE-09?ZCM?)	40,000 [11.7]	28,050 [8.2]	11,950 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-H*4824(RGGE-10?ZCM?)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-H*4824(RGGE-12?RCM?)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-H*4824(RGJF-09?ZCM?)	40,000 [11.7]	28,050 [8.2]	11,950 [3.5]	12.50	15.10	77	1,225 [578]
	RCFL-H*4824(RGJF-10?ZCM?)	40,000 [11.7]	27,900 [8.2]	12,100 [3.5]	12.50	15.10	77	1,200 [566]
	RCFL-H*4824(RGLE-10?BRM?)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-H*4824(RGLE-12?ARM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*4824(RGLT-07?BRQ?)	40,000 [11.7]	28,150 [8.2]	11,850 [3.5]	12.50	15.50	77	1,250 [590]
	RCFL-H*4824(RGLT-10?BRM?)	40,500 [11.9]	28,650 [8.4]	11,850 [3.5]	12.50	15.50	77	1,250 [590]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions



Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*4824(RGLT-12?ARM?)	41,000 [12.0]	29,850 [8.7]	11,150 [3.3]	12.50	15.50	77	1,375 [649]
	RCFL-H*4824(RGPE-07?BRQ?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*4824(RGPE-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*4824(RGPE-12?ARM?)	40,000 [11.7]	27,850 [8.2]	12,150 [3.6]	13.00	15.50	77	1,200 [566]
	RCFL-H*4824(RGPT-07?BRQ?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*4824(RGPT-10?BRM?)	40,000 [11.7]	28,000 [8.2]	12,000 [3.5]	13.00	15.50	77	1,225 [578]
	RCFL-H*4824(RGPT-12?ARM?)	41,000 [12.0]	29,850 [8.7]	11,150 [3.3]	13.00	15.50	77	1,375 [649]
	RCFL-H*4824(RGRM-10?ZAJ?)	39,500 [11.6]	27,200 [8.0]	12,300 [3.6]	12.00	15.00	77	1,150 [543]
	RCFL-H*4824(RGRM-12?RAJ?)	40,000 [11.7]	28,050 [8.2]	11,950 [3.5]	12.00	15.00	77	1,225 [578]
	RCFL-H*4824(RGTM-07?RBG?)	39,500 [11.6]	27,000 [7.9]	12,500 [3.7]	12.50	15.50	77	1,125 [531]
42	RCFL-H*4824(RGTM-09?ZAJ?)	40,000 [11.7]	28,200 [8.3]	11,800 [3.5]	12.50	15.10	77	1,250 [590]
	RCFL-H*4824(RGTM-10?RBJ?)	39,500 [11.6]	26,950 [7.9]	12,550 [3.7]	13.00	15.50	77	1,125 [531]
	RCFL-H*4824(RHWB-08WRX60A)	40,500 [11.9]	29,300 [8.6]	11,200 [3.3]	13.00	15.50	77	1,350 [637]
	RCFL-H*4824(RHWB-10WRX60A)	41,000 [12.0]	30,300 [8.9]	10,700 [3.1]	13.00	15.50	77	1,400 [661]
	RCFL-H*4824(ROCA-070E03)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-H*4824(ROCA-070E04)	40,000 [11.7]	27,950 [8.2]	12,050 [3.5]	12.50	15.00	77	1,200 [566]
	RCFL-H*4824(ROLA-070E03)	40,000 [11.7]	27,750 [8.1]	12,250 [3.6]	12.50	15.00	77	1,175 [554]
	RCFL-H*4824(ROLA-070E04)	40,500 [11.9]	29,400 [8.6]	11,100 [3.3]	12.50	15.00	77	1,375 [649]
	RCFL-H*4824(ROLA-115E05)	40,500 [11.9]	29,700 [8.7]	10,800 [3.2]	12.50	15.00	77	1,400 [661]
	RCFL-H*4824+RXMD-C04	40,500 [11.9]	29,600 [8.7]	10,700 [3.1]	12.00	14.50	77	1,425 [672]
	RCFN-H*4824(RGFE-09?ZCM?)	42,000 [12.3]	31,050 [9.1]	10,950 [3.2]	13.00	15.50	77	1,200 [566]
	RCFN-H*4824(RGFE-10?ZCM?)	42,000 [12.3]	31,250 [9.2]	10,750 [3.1]	12.50	15.00	77	1,225 [578]
	RCFN-H*4824(RGFE-12?RCM?)	42,000 [12.3]	31,200 [9.1]	10,800 [3.2]	13.00	15.50	77	1,225 [578]
	RCFN-H*4824(RGFG-09?ZCM?)	43,500 [12.7]	34,550 [10.1]	8,950 [2.6]	12.50	15.10	77	1,400 [661]
	RCFN-H*4824(RGFG-10?ZCM?)	43,500 [12.7]	34,550 [10.1]	8,950 [2.6]	12.50	15.00	77	1,400 [661]
	RCFN-H*4824(RGFG-12?RCM?)	43,000 [12.6]	32,750 [9.6]	10,250 [3.0]	13.00	16.00	77	1,225 [578]
	RCFN-H*4824(RGGE-09?ZCM?)	42,000 [12.3]	31,200 [9.1]	10,800 [3.2]	13.00	15.50	77	1,225 [578]
	RCFN-H*4824(RGGE-10?ZCM?)	42,000 [12.3]	31,050 [9.1]	10,950 [3.2]	13.00	15.50	77	1,200 [566]
	RCFN-H*4824(RGGE-12?RCM?)	42,000 [12.3]	31,000 [9.1]	11,000 [3.2]	13.00	16.00	77	1,200 [566]
	RCFN-H*4824(RGJF-09?ZCM?)	42,000 [12.3]	31,200 [9.1]	10,800 [3.2]	13.00	15.50	77	1,225 [578]
	RCFN-H*4824(RGJF-10?ZCM?)	42,000 [12.3]	31,050 [9.1]	10,950 [3.2]	13.00	15.50	77	1,200 [566]
	RCFN-H*4824(RGJF-12?RCM?)	42,000 [12.3]	31,000 [9.1]	11,000 [3.2]	13.00	16.00	77	1,200 [566]
	RCFN-H*4824(RGLE-07?BRQ?)	42,000 [12.3]	31,150 [9.1]	10,850 [3.2]	13.00	16.00	77	1,225 [578]
	RCFN-H*4824(RGLE-10?BRM?)	42,000 [12.3]	31,000 [9.1]	11,000 [3.2]	13.00	16.00	77	1,200 [566]
	RCFN-H*4824(RGLE-12?							

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFN-H*4824(ROLA-070E04)	43,000 [12.6]	33,900 [9.9]	9,100 [2.7]	12.50	15.00	77	1,375 [649]
	RCFN-H*4824(ROLA-115E05)	43,000 [12.6]	34,200 [10.0]	8,800 [2.6]	12.50	15.00	77	1,400 [661]
	RCFN-H*4824+RXMD-C04	42,000 [12.3]	30,400 [8.9]	11,600 [3.4]	12.50	15.00	77	1,200 [566]
	RBHP-24(RCHL-48A1)	40,000 [11.7]	28,200 [8.3]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4821(RGFG-09?ZCM?)	41,500 [12.2]	31,650 [9.3]	9,850 [2.9]	12.50	15.10	77	1,200 [566]
	RCQD-4821(RGFG-10?ZCM?)	41,500 [12.2]	31,650 [9.3]	9,850 [2.9]	12.50	15.10	77	1,200 [566]
	RCQD-4821(RGPT-05?BMK?)	40,500 [11.9]	31,150 [9.1]	9,350 [2.7]	12.00	14.00	77	1,250 [590]
	RCQD-4821(RGPT-07?AMK?)	41,000 [12.0]	31,650 [9.3]	9,350 [2.7]	12.00	14.50	77	1,250 [590]
	RCQD-4821(RGPT-07?BRQ?)	41,000 [12.0]	31,550 [9.2]	9,450 [2.8]	13.00	15.50	77	1,250 [590]
	RCQD-4821(RGPT-10?BRM?)	41,500 [12.2]	32,050 [9.4]	9,450 [2.8]	13.00	15.50	77	1,250 [590]
	RCQD-4821(RHWP-04WMX36A)	41,500 [12.2]	31,400 [9.2]	10,100 [3.0]	13.00	15.50	77	1,200 [566]
	RCQD-4821(RHWP-06WMX48A)	41,500 [12.2]	31,400 [9.2]	10,100 [3.0]	12.50	15.10	77	1,200 [566]
	RCQD-4821(ROCA-070E03)	40,500 [11.9]	30,800 [9.0]	9,700 [2.8]	12.00	14.50	77	1,200 [566]
	RCQD-4821(ROCA-070E04)	40,500 [11.9]	30,800 [9.0]	9,700 [2.8]	12.00	14.50	77	1,200 [566]
	RCQD-4821(ROLA-070E03)	41,000 [12.0]	31,150 [9.1]	9,850 [2.9]	12.50	15.00	77	1,175 [554]
	RCQD-4821(ROLA-070E04)	41,500 [12.2]	32,850 [9.6]	8,650 [2.5]	12.00	14.50	77	1,375 [649]
	RCQD-4824(RGFG-09?ZCM?)	40,000 [11.7]	30,300 [8.9]	9,700 [2.8]	11.50	13.50	77	1,200 [566]
	RCQD-4824(RGFG-10?ZCM?)	40,000 [11.7]	30,300 [8.9]	9,700 [2.8]	11.50	13.50	77	1,200 [566]
	RCQD-4824(RGFG-12?RCM?)	40,500 [11.9]	30,900 [9.1]	9,600 [2.8]	11.50	13.50	77	1,225 [578]
	RCQD-4824(RGPT-07?BRQ?)	40,500 [11.9]	31,650 [9.3]	8,850 [2.6]	11.50	13.50	77	1,325 [625]
42	RCQD-4824(RGPT-10?BRM?)	40,000 [11.7]	30,850 [9.0]	9,150 [2.7]	11.50	13.50	77	1,275 [602]
	RCQD-4824(RGPT-12?ARM?)	40,000 [11.7]	30,550 [9.0]	9,450 [2.8]	11.50	14.00	77	1,225 [578]
	RCQD-4824(RHWP-08WRX60A)	42,000 [12.3]	34,200 [10.0]	7,800 [2.3]	11.50	14.00	77	1,525 [720]
	RCQD-4824(RHWP-10WRX60A)	42,000 [12.3]	34,400 [10.1]	7,600 [2.2]	11.50	14.00	77	1,550 [731]
	RCQD-4824(ROCA-070E03)	39,500 [11.6]	30,000 [8.8]	9,500 [2.8]	11.00	13.00	77	1,200 [566]
	RCQD-4824(ROCA-070E04)	39,500 [11.6]	30,000 [8.8]	9,500 [2.8]	11.00	13.00	77	1,200 [566]
	RCQD-4824(ROLA-070E03)	39,500 [11.6]	29,800 [8.7]	9,700 [2.8]	11.50	13.50	77	1,175 [554]
	RCQD-4824(ROLA-070E04)	39,500 [11.6]	29,800 [8.7]	9,700 [2.8]	11.50	13.50	77	1,175 [554]
	RCQD-4824(ROLA-115E05)	40,000 [11.7]	30,450 [8.9]	9,550 [2.8]	11.50	13.50	77	1,200 [566]
	RHKL-HM3821(RCSL-H*3821)	40,000 [11.7]	28,550 [8.4]	11,450 [3.4]	13.00	15.50	77	1,200 [566]
	RHLL-HM3821(RCSL-H*3821)	40,000 [11.7]	28,350 [8.3]	11,650 [3.4]	13.00	16.00	77	1,225 [578]
	RHKL-HM4821(RCSL-H*4821)	41,000 [12.0]	30,100 [8.8]	10,900 [3.2]	13.00	15.50	77	1,400 [661]
	RHLL-HM4821(RCSL-H*4821)	41,000 [12.0]	30,100 [8.8]	10,900 [3.2]	13.00	15.50	77	1,400 [661]
	RHSL-HM4221(RCSL-H*4821)	40,000 [11.7]	28,900 [8.5]	11,100 [3.3]	12.00	14.50	77	1,350 [637]
	RHPN-HM3624(RCSN-H*3624)	43,000 [12.6]	31,200 [9.1]	11,800 [3.5]	13.00	16.00	77	1,200 [566]
48	RCFL-H*4821+RXMD-C04 ①	48,500 [14.2]	34,300 [10.0]	14,200 [4.2]	12.00	14.50	77	1,600 [755]
	RCFL-A*4821(RGGE-09?ZCM?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGLE-07?BRQ?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGLE-10?BRM?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.50	15.00	77	1,400 [661]
	RCFL-A*4821(RGLT-07?AMK?)	48,000 [14.1]	32,000 [9.4]	16,000 [4.7]	12.50	15.00	77	1,325 [625]
	RCFL-A*4821(RGLT-07?BRQ?)	48,000 [14.1]	33,000 [9.7]	15,000 [4.4]	12.00	14.50	77	1,425 [672]
	RCFL-A*4821(RGLT-10?BRM?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGPE-07?BRQ?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGPE-10?BRM?)	48,000 [14.1]	34,000 [10.0]	14,000 [4.1]	12.00	14.50	77	1,550 [731]
	RCFL-A*4821(RGPT-07?BRQ?)	48,500 [14.2]	33,200 [9.7]	15,300 [4.5]	12.00	14.50	77	1,425 [672]
	RCFL-A*4821(RGPT-10?BRM?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGTM-07?RBG?)	48,000 [14.1]	32,000 [9.4]	16,000 [4.7]	12.00	14.50	77	1,325 [625]
	RCFL-A*4821(RGTM-09?ZAJ?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(ROLA-070E04)	48,000 [14.1]	32,400 [9.5]	15,600 [4.6]	12.00	14.50	77	1,375 [649]
	RCFL-A*4821(ROLA-115E05)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

48

[1 Designates Metric Conversions

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*4824(RGLE-10?BRM?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.50	15.00	77	1,400 [661]
	RCFL-H*4824(RGLE-12?ARM?)	48,500 [14.2]	33,200 [9.7]	15,300 [4.5]	12.50	15.00	77	1,425 [672]
	RCFL-H*4824(RGLT-07?BRQ?)	48,000 [14.1]	32,700 [9.6]	15,300 [4.5]	12.00	14.50	77	1,425 [672]
	RCFL-H*4824(RGLT-10?BRM?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGLT-12?ARM?)	48,000 [14.1]	32,200 [9.4]	15,800 [4.6]	12.50	15.00	77	1,350 [637]
	RCFL-H*4824(RGPE-07?BRQ?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGPE-10?BRM?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGPE-12?ARM?)	48,500 [14.2]	33,200 [9.7]	15,300 [4.5]	12.50	15.00	77	1,425 [672]
	RCFL-H*4824(RGPT-07?BRQ?)	48,500 [14.2]	33,200 [9.7]	15,300 [4.5]	12.00	14.50	77	1,425 [672]
	RCFL-H*4824(RGPT-10?BRM?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
48	RCFL-H*4824(RGPT-12?ARM?)	48,000 [14.1]	32,200 [9.4]	15,800 [4.6]	12.50	15.00	77	1,350 [637]
	RCFL-H*4824(RGRM-12?RAJ?)	48,000 [14.1]	32,700 [9.6]	15,300 [4.5]	12.00	14.50	77	1,425 [672]
	RCFL-H*4824(RGTM-07?RBG?)	48,000 [14.1]	32,000 [9.4]	16,000 [4.7]	12.00	14.50	77	1,325 [625]
	RCFL-H*4824(RGTM-09?ZAJ?)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGTM-10?RBJ?)	48,000 [14.1]	32,700 [9.6]	15,300 [4.5]	12.00	14.50	77	1,425 [672]
	RCFL-H*4824(RHWB-08WRX60A)	48,500 [14.2]	33,300 [9.8]	15,200 [4.5]	12.50	15.10	77	1,450 [684]
	RCFL-H*4824(RHWB-10WRX60A)	48,500 [14.2]	33,500 [9.8]	15,000 [4.4]	12.50	15.10	77	1,475 [696]
	RCFL-H*4824(ROLA-070E04)	48,000 [14.1]	32,400 [9.5]	15,600 [4.6]	12.00	14.50	77	1,375 [649]
	RCFL-H*4824(ROLA-115E05)	48,000 [14.1]	32,500 [9.5]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824+RXMD-C04	48,500 [14.2]	34,300 [10.0]	14,200 [4.2]	12.00	14.50	77	1,600 [755]
	RCFN-H*4824(RGFE-12?RCM?)	51,000 [14.9]	35,800 [10.5]	15,200 [4.5]	12.50	15.00	77	1,450 [684]
	RCFN-H*4824(RGFG-12?RCM?)	51,000 [14.9]	35,800 [10.5]	15,200 [4.5]	12.50	15.00	77	1,450 [684]
	RCFN-H*4824(RGGE-09?ZCM?)	50,500 [14.8]	35,000 [10.3]	15,500 [4.5]	12.50	15.00	77	1,400 [661]
	RCFN-H*4824(RGGE-10?ZCM?)	50,500 [14.8]	35,000 [10.3]	15,500 [4.5]	12.50	15.00	77	1,400 [661]
	RCFN-H*4824(RGGE-12?RCM?)	51,500 [15.1]	37,400 [11.0]	14,100 [4.1]	12.50	15.00	77	1,575 [743]
	RCFN-H*4824(RGJF-09?ZCM?)	50,500 [14.8]	35,000 [10.3]	15,500 [4.5]	12.50	15.00	77	1,400 [661]
	RCFN-H*4824(RGJF-10?ZCM?)	50,500 [14.8]	35,000 [10.3]	15,500 [4.5]	12.50	15.00	77	1,400 [661]
	RCFN-H*4824(RGJF-12?RCM?)	51,500 [15.1]	37,400 [11.0]	14,100 [4.1]	12.50	15.00	77	1,575 [743]
	RCFN-H*4824(RGLE-07?BRQ?)	51,000 [14.9]	35,500 [10.4]	15,500 [4.5]	12.50	15.00	77	1,400 [661]
	RCFN-H*4824(RGLE-10?BRM?)	51,500 [15.1]	36,700 [10.8]	14,800 [4.3]	13.00	15.50	77	1,500 [708]
	RCFN-H*4824(RGLE-12?ARM?)	51,000 [14.9]	35,600 [10.4]	15,400 [4.5]	13.00	15.50	77	1,425 [672]
	RCFN-H*4824(RGLT-07?BRQ?)	51,000 [14.9]	35,800 [10.5]	15,200 [4.5]	13.00	15.50	77	1,450 [684]
	RCFN-H*4824(RGLT-10?BRM?)	51,000 [14.9]	35,800 [10.5]	15,200 [4.5]	13.00	15.50	77	1,450 [684]
	RCFN-H*4824(RGLT-12?ARM?)	52,000 [15.2]	38,500 [11.3]	13,500 [4.0]	12.50	15.00	77	1,700 [802]
	RCFN-H*4							

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

48

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12 48	RHLL-HM4824(RCSL-H*4824)	49,500 [14.5]	35,300 [10.3]	14,200 [4.2]	13.00	15.50	77	1,625 [767]
	RHPL-HM4824(RCSL-H*4824)	49,500 [14.5]	35,300 [10.3]	14,200 [4.2]	13.00	15.50	77	1,625 [767]
	RHPN-HM4824(RCSN-H*4824)	52,000 [15.2]	38,000 [11.1]	14,000 [4.1]	13.00	16.00	77	1,600 [755]
49	RCFL-H*4821+RXMD-C04 ①	46,500 [13.6]	33,000 [9.7]	13,300 [3.9]	12.00	14.50	77	1,600 [755]
	RCFL-A*4821(RGFE-09?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGFE-10?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,400 [4.2]	12.00	14.50	77	1,425 [672]
	RCFL-A*4821(RGFG-09?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGFG-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGGE-09?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-A*4821(RGGE-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGLE-07?BRQ?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4821(RGLE-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	13.00	15.50	77	1,400 [661]
	RCFL-A*4821(RGLT-07?AMK?)	45,500 [13.3]	30,600 [9.0]	15,000 [4.4]	13.00	15.50	77	1,325 [625]
	RCFL-A*4821(RGLT-07?BRQ?)	46,000 [13.5]	31,600 [9.3]	14,400 [4.2]	12.50	15.10	77	1,425 [672]
	RCFL-A*4821(RGLT-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4821(RGPE-07?BRQ?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4821(RGPE-10?BRM?)	46,500 [13.6]	32,800 [9.6]	13,600 [4.0]	12.50	15.10	77	1,550 [731]
	RCFL-A*4821(RGPT-07?AMK?)	45,000 [13.2]	30,200 [8.8]	15,000 [4.4]	12.00	14.50	77	1,325 [625]
	RCFL-A*4821(RGPT-07?BRQ?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-A*4821(RGPT-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	13.00	15.50	77	1,400 [661]
	RCFL-A*4821(RGRM-09?ZAJ?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(RGRM-10?ZAJ?)	45,500 [13.3]	31,200 [9.1]	14,400 [4.2]	12.00	14.50	77	1,425 [672]
	RCFL-A*4821(RGTM-07?RBG?)	45,500 [13.3]	30,600 [9.0]	15,000 [4.4]	12.50	15.10	77	1,325 [625]
	RCFL-A*4821(RGTM-09?ZAJ?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-A*4821(RHWP-04WMX36A)	45,500 [13.3]	30,300 [8.9]	15,200 [4.5]	12.50	15.10	77	1,300 [613]
	RCFL-A*4821(RHWP-06WMX48A)	45,000 [13.2]	29,800 [8.7]	15,200 [4.5]	12.50	15.00	77	1,300 [613]
	RCFL-A*4821(ROCA-070E04)	45,500 [13.3]	30,800 [9.0]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4821(ROLA-070E04)	45,500 [13.3]	31,000 [9.1]	14,700 [4.3]	12.50	15.10	77	1,375 [649]
	RCFL-A*4821(ROLA-115E05)	46,000 [13.5]	31,200 [9.1]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4821+RXMD-C04	46,500 [13.6]	33,200 [9.7]	13,300 [3.9]	12.00	14.50	77	1,600 [755]
	RCFL-A*4824(RGFE-09?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4824(RGFE-10?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,400 [4.2]	12.00	14.50	77	1,425 [672]
	RCFL-A*4824(RGFE-12?RCM?)	46,000 [13.5]	31,800 [9.3]	14,200 [4.2]	12.50	15.10	77	1,450 [684]
	RCFL-A*4824(RGFG-09?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4824(RGFG-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4824(RGFG-12?RCM?)	46,000 [13.5]	31,800 [9.3]	14,200 [4.2]	12.50	15.10	77	1,450 [684]
	RCFL-A*4824(RGGE-09?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-A*4824(RGGE-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4824(RGGE-12?RCM?)	46,000 [13.5]	31,200 [9.1]	14,700 [4.3]	12.50	15.10	77	1,375 [649]
	RCFL-A*4824(RGJF-09?ZCM?)	45,500 [13.3]	30,900 [9.1]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4824(RGJF-10?ZCM?)	45,500 [13.3]	30,950 [9.1]	14,550 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4824(RGJF-12?RCM?)	46,000 [13.5]	31,150 [9.1]	14,850 [4.4]	12.50	15.50	77	1,375 [649]
	RCFL-A*4824(RGLE-07?BRQ?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4824(RGLE-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	13.00	15.50	77	1,400 [661]
	RCFL-A*4824(RGLE-12?ARM?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-A*4824(RGLT-07?BRQ?)	46,000 [13.5]	31,600 [9.3]	14,400 [4.2]	12.50	15.10	77	1,425 [672]
	RCFL-A*4824(RGLT-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4824(RGLT-12?ARM?)	46,000 [13.5]	31,000 [9.1]	14,900 [4.4]	13.00	15.50	77	1,350 [637]
	RCFL-A*4824(RGPE-07?BRQ?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4824(RGPE-10?BRM?)	46,500 [13.6]	32,800 [9.6]	13,600 [4.0]	12.50	15.10	77	1,550 [731]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-A*4824(RGPE-12?ARM?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-A*4824(RGPT-07?BRQ?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-A*4824(RGPT-10?BRM?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-A*4824(RGPT-12?ARM?)	46,000 [13.5]	31,000 [9.1]	14,900 [4.4]	13.00	15.50	77	1,350 [637]
	RCFL-A*4824(RGRM-09?ZAJ?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4824(RGRM-10?ZAJ?)	45,500 [13.3]	31,200 [9.1]	14,400 [4.2]	12.00	14.50	77	1,425 [672]
	RCFL-A*4824(RGRM-12?RAJ?)	46,000 [13.5]	31,400 [9.2]	14,400 [4.2]	12.50	15.00	77	1,425 [672]
	RCFL-A*4824(RGTM-07?RBG?)	45,500 [13.3]	30,600 [9.0]	15,000 [4.4]	12.50	15.10	77	1,325 [625]
	RCFL-A*4824(RGTM-09?ZAJ?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-A*4824(RGTM-10?RBJ?)	45,500 [13.3]	30,200 [8.8]	15,300 [4.5]	13.00	15.50	77	1,275 [602]
49	RCFL-A*4824(RHWB-08WRX60A)	45,500 [13.3]	30,300 [8.9]	15,200 [4.5]	13.00	15.50	77	1,300 [613]
	RCFL-A*4824(RHWB-10WRX60A)	46,000 [13.5]	31,100 [9.1]	14,900 [4.4]	13.00	16.00	77	1,350 [637]
	RCFL-A*4824(ROCA-070E04)	45,500 [13.3]	30,800 [9.0]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-A*4824(ROLA-070E04)	45,500 [13.3]	31,000 [9.1]	14,700 [4.3]	12.50	15.10	77	1,375 [649]
	RCFL-A*4824(ROLA-115E05)	46,000 [13.5]	31,200 [9.1]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-A*4824+RXMD-C04	46,500 [13.6]	33,000 [9.7]	13,300 [3.9]	12.00	14.50	77	1,600 [755]
	RCFL-H*4821(RGFE-09?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4821(RGFE-10?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,400 [4.2]	12.00	14.50	77	1,425 [672]
	RCFL-H*4821(RGFG-09?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4821(RGFG-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4821(RGGE-09?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-H*4821(RGGE-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4821(RGJF-09?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-H*4821(RGJF-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4821(RGLE-07?BRQ?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-H*4821(RGLE-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	13.00	15.50	77	1,400 [661]
	RCFL-H*4821(RGLT-07?AMK?)	45,500 [13.3]	30,600 [9.0]	15,000 [4.4]	13.00	15.50	77	1,325 [625]
	RCFL-H*4821(RGLT-07?BRQ?)	46,000 [13.5]	31,600 [9.3]	14,400 [4.2]	12.50	15.10	77	1,425 [672]
	RCFL-H*4821(RGLT-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-H*4821(RGPE-07?BRQ?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-H*4821(RGPE-10?BRM?)	46,500 [13.6]	32,800 [9.6]	13,600 [4.0]	12.50	15.10	77	1,550 [731]
	RCFL-H*4821(RGPT-07?AMK?)	45,000 [13.2]	30,200 [8.8]	15,000 [4.4]	12.00	14.50	77	1,325 [625]
	RCFL-H*4821(RGPT-07?BRQ?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-H*4821(RGPT-10?BRM?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-H*4821(RGRM-09?ZAJ?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4821(RGRM-10?ZAJ?)	45,500 [13.3]	31,200 [9.1]	14,400 [4.2]	12.00	14.50	77	1,425 [672]
	RCFL-H*4821(RGTM-07?RBG?)	45,500 [13.3]	30,600 [9.0]	15,000 [4.4]	12.50	15.10	77	1,325 [625]
	RCFL-H*4821(RGTM-09?ZAJ?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-H*4821(RHWB-04WMX36A)	45,500 [13.3]	30,300 [8.9]	15,200 [4.5]	12.50	15.10	77	1,300 [613]
	RCFL-H*4821(RHWB-06WMX48A)	45,000 [13.2]	29,800 [8.7]	15,200 [4.5]	12.50	15.00	77	1,300 [613]
	RCFL-H*4821(ROCA-070E04)	45,500 [13.3]	30,800 [9.0]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4821(ROLA-070E04)	45,500 [13.3]	31,000 [9.1]	14,700 [4.3]	12.50	15.10	77	1,375 [649]
	RCFL-H*4821(ROLA-115E05)	46,000 [13.5]	31,200 [9.1]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-H*4824(RGFE-09?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGFE-10?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,400 [4.2]	12.00	14.50	77	1,425 [672]
	RCFL-H*4824(RGFE-12?RCM?)	46,000 [13.5]	31,800 [9.3]	14,200 [4.2]	12.50	15.10	77	1,450 [684]
	RCFL-H*4824(RGFG-09?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGFG-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGFG-12?RCM?)	46,000 [13.5]	31,800 [9.3]	14,200 [4.2]	12.50	15.10	77	1,450 [684]
	RCFL-H*4824(RGGE-09?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]

① Highest sales volume tested combination required by D.O.E. test procedures.

[1 Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*4824(RGGE-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGGE-12?RCM?)	46,000 [13.5]	31,200 [9.1]	14,700 [4.3]	12.50	15.10	77	1,375 [649]
	RCFL-H*4824(RGJF-09?ZCM?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-H*4824(RGJF-10?ZCM?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGJF-12?RCM?)	46,000 [13.5]	31,200 [9.1]	14,700 [4.3]	12.50	15.10	77	1,375 [649]
	RCFL-H*4824(RGLE-07?BRQ?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-H*4824(RGLE-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	13.00	15.50	77	1,400 [661]
	RCFL-H*4824(RGLE-12?ARM?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-H*4824(RGLT-07?BRQ?)	46,000 [13.5]	31,600 [9.3]	14,400 [4.2]	12.50	15.10	77	1,425 [672]
	RCFL-H*4824(RGLT-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-H*4824(RGLT-12?ARM?)	46,000 [13.5]	31,000 [9.1]	14,900 [4.4]	13.00	15.50	77	1,350 [637]
	RCFL-H*4824(RGPE-07?BRQ?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-H*4824(RGPE-10?BRM?)	46,500 [13.6]	32,800 [9.6]	13,600 [4.0]	12.50	15.10	77	1,550 [731]
	RCFL-H*4824(RGPE-12?ARM?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-H*4824(RGPT-07?BRQ?)	46,000 [13.5]	31,800 [9.3]	14,400 [4.2]	13.00	15.50	77	1,425 [672]
	RCFL-H*4824(RGPT-10?BRM?)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	13.00	15.50	77	1,400 [661]
	RCFL-H*4824(RGPT-12?ARM?)	46,000 [13.5]	31,000 [9.1]	14,900 [4.4]	13.00	15.50	77	1,350 [637]
	RCFL-H*4824(RGRM-09?ZAJ?)	45,500 [13.3]	31,000 [9.1]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(RGRM-10?ZAJ?)	45,500 [13.3]	31,200 [9.1]	14,400 [4.2]	12.00	14.50	77	1,425 [672]
	RCFL-H*4824(RGRM-12?RAJ?)	46,000 [13.5]	31,400 [9.2]	14,400 [4.2]	12.50	15.00	77	1,425 [672]
	RCFL-H*4824(RGTM-07?RBG?)	45,500 [13.3]	30,600 [9.0]	15,000 [4.4]	12.50	15.10	77	1,325 [625]
	RCFL-H*4824(RGTM-09?ZAJ?)	45,500 [13.3]	31,200 [9.1]	14,600 [4.3]	12.50	15.00	77	1,400 [661]
	RCFL-H*4824(RGTM-10?RBJ?)	45,500 [13.3]	30,200 [8.8]	15,300 [4.5]	13.00	15.50	77	1,275 [602]
	RCFL-H*4824(RHWP-08WRX60A)	45,500 [13.3]	30,300 [8.9]	15,200 [4.5]	13.00	15.50	77	1,300 [613]
	RCFL-H*4824(RHWP-10WRX60A)	46,000 [13.5]	31,100 [9.1]	14,900 [4.4]	13.00	16.00	77	1,350 [637]
	RCFL-H*4824(ROCA-070E04)	45,500 [13.3]	30,800 [9.0]	14,600 [4.3]	12.00	14.50	77	1,400 [661]
	RCFL-H*4824(ROLA-070E04)	45,500 [13.3]	31,000 [9.1]	14,700 [4.3]	12.50	15.10	77	1,375 [649]
	RCFL-H*4824(ROLA-115E05)	46,000 [13.5]	31,200 [9.1]	14,600 [4.3]	12.50	15.10	77	1,400 [661]
	RCFL-H*4824+RXMD-C04	46,500 [13.6]	33,000 [9.7]	13,300 [3.9]	12.00	14.50	77	1,600 [755]
	RCFN-H*4824(RGFE-09?ZCM?)	49,000 [14.4]	36,600 [10.7]	12,300 [3.6]	13.00	15.50	77	1,400 [661]
	RCFN-H*4824(RGFE-10?ZCM?)	49,000 [14.4]	36,800 [10.8]	12,100 [3.5]	13.00	15.50	77	1,425 [672]
	RCFN-H*4824(RGFE-12?RCM?)	49,000 [14.4]	37,200 [10.9]	11,900 [3.5]	13.00	16.00	77	1,450 [684]
	RCFN-H*4824(RGFG-09?ZCM?)	49,000 [14.4]	36,600 [10.7]	12,300 [3.6]	13.00	15.50	77	1,400 [661]
	RCFN-H*4824(RGFG-10?ZCM?)	49,000 [14.4]	36,400 [10.7]	12,300 [3.6]	13.00	15.50	77	1,400 [661]
	RCFN-H*4824(RGFG-12?RCM?)	49,000 [14.4]	37,200 [10.9]	11,900 [3.5]	13.00	16.00	77	1,450 [684]
	RCFN-H*4824(RGGE-09?ZCM?)	49,000 [14.4]	36,600 [10.7]	12,300 [3.6]	13.00	16.00	77	1,400 [661]
	RCFN-H*4824(RGGE-10?ZCM?)	49,000 [14.4]	36,600 [10.7]	12,300 [3.6]	13.00	15.50	77	1,400 [661]
	RCFN-H*4824(RGGE-12?RCM?)	49,000 [14.4]	36,600 [10.7]	12,500 [3.7]	13.00	16.00	77	1,375 [649]
	RCFN-H*4824(RGJF-09?ZCM?)	49,000 [14.4]	36,600 [10.7]	12,300 [3.6]	13.00	16.00	77	1,400 [661]
	RCFN-H*4824(RGJF-10?ZCM?)	49,000 [14.4]	36,600 [10.7]	12,300 [3.6]	13.00	15.50	77	1,400 [661]
	RCFN-H*4824(RGJF-12?RCM?)	49,000 [14.4]	36,600 [10.7]	12,500 [3.7]	13.00	16.00	77	1,375 [649]
	RCFN-H*4824(RGLE-07?BRQ?)	49,000 [14.4]	36,800 [10.8]	12,300 [3.6]	13.00	16.00	77	1,400 [661]
	RCFN-H*4824(RGLE-10?BRM?)	50,000 [14.6]	39,000 [11.4]	10,900 [3.2]	13.00	16.00	77	1,600 [755]
	RCFN-H*4824(RGLE-12?ARM?)	50,000 [14.6]	38,500 [11.3]	11,400 [3.3]	13.00	16.00	77	1,525 [720]
	RCFN-H*4824(RGLT-07?BRQ?)	49,500 [14.5]	37,400 [11.0]	11,900 [3.5]	13.00	16.00	77	1,450 [684]
	RCFN-H*4824(RGLT-10?BRM?)	49,500 [14.5]	37,400 [11.0]	11,900 [3.5]	13.00	16.00	77	1,450 [684]
	RCFN-H*4824(RGLT-12?ARM?)	50,500 [14.8]	40,500 [11.9]	10,100 [3.0]	13.00	16.00	77	1,700 [802]
	RCFN-H*4824(RGPE-07?BRQ?)	49,000 [14.4]	36,800 [10.8]	12,300 [3.6]	13.00	16.00	77	1,400 [661]
	RCFN-H*4824(RGPE-10?BRM?)	50,000 [14.6]	38,500 [11.3]	11,200 [3.3]	13.00	16.00	77	1,550 [731]
	RCFN-H*4824(RGPE-12?ARM?)	50,000 [14.6]	39,000 [11.4]	10,900 [3.2]	13.00	16.00	77	1,625 [767]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions



Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFN-H*4824(RGPT-07?BRQ?)	49,500 [14.5]	37,400 [11.0]	11,900 [3.5]	13.00	16.00	77	1,450 [684]
	RCFN-H*4824(RGPT-10?BRM?)	49,500 [14.5]	37,600 [11.0]	11,900 [3.5]	13.00	16.00	77	1,450 [684]
	RCFN-H*4824(RGPT-12?ARM?)	49,000 [14.4]	36,800 [10.8]	12,500 [3.7]	13.00	16.00	77	1,375 [649]
	RCFN-H*4824(RGRM-09?ZAJ?)	48,500 [14.2]	36,400 [10.7]	12,300 [3.6]	13.00	15.50	77	1,400 [661]
	RCFN-H*4824(RGRM-12?RAJ?)	49,000 [14.4]	37,000 [10.8]	12,100 [3.5]	13.00	16.00	77	1,425 [672]
	RCFN-H*4824(RGTM-07?RBG?)	49,500 [14.5]	37,600 [11.0]	11,800 [3.5]	13.00	16.00	77	1,475 [696]
	RCFN-H*4824(RGTM-09?ZAJ?)	49,000 [14.4]	36,600 [10.7]	12,300 [3.6]	13.00	16.00	77	1,400 [661]
	RCFN-H*4824(RGTM-10?RBJ?)	49,000 [14.4]	37,000 [10.8]	12,100 [3.5]	13.00	16.00	77	1,425 [672]
	RCFN-H*4824(RHWP-08WRX60A)	48,000 [14.1]	35,850 [10.5]	12,150 [3.6]	13.00	16.00	77	1,450 [684]
	RCFN-H*4824(RHWP-10WRX60A)	48,000 [14.1]	11,700 [3.4]	12,450 [3.6]	13.00	16.00	77	1,400 [661]
	RCFN-H*4824(ROCA-070E04)	48,500 [14.2]	36,400 [10.7]	12,300 [3.6]	13.00	15.50	77	1,400 [661]
	RCFN-H*4824(ROLA-070E04)	49,000 [14.4]	36,400 [10.7]	12,500 [3.7]	13.00	16.00	77	1,375 [649]
	RCFN-H*4824(ROLA-115E05)	49,000 [14.4]	36,800 [10.8]	12,300 [3.6]	13.00	16.00	77	1,400 [661]
	RCFN-H*4824+RXMD-C04	49,500 [14.5]	38,500 [11.3]	10,900 [3.2]	12.50	15.50	77	1,600 [755]
	RBHP-24(RCHL-48A1)	44,500 [13.0]	31,400 [9.2]	13,100 [3.8]	12.50	15.10	77	1,600 [755]
	RCQD-4821(RGFE-09?ZCM?)	48,000 [14.1]	36,000 [10.5]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4821(RGFE-10?ZCM?)	48,000 [14.1]	36,200 [10.6]	11,600 [3.4]	12.50	15.10	77	1,425 [672]
	RCQD-4821(RGFG-09?ZCM?)	48,000 [14.1]	36,000 [10.5]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4821(RGFG-10?ZCM?)	48,000 [14.1]	36,000 [10.5]	11,800 [3.5]	12.50	15.10	77	1,400 [661]
	RCQD-4821(RGJF-09?ZCM?)	48,000 [14.1]	36,200 [10.6]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4821(RGJF-10?ZCM?)	48,000 [14.1]	36,000 [10.5]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4821(RGPE-07?BRQ?)	48,000 [14.1]	36,400 [10.7]	11,800 [3.5]	13.00	16.00	77	1,400 [661]
	RCQD-4821(RGPE-10?BRM?)	48,000 [14.1]	36,400 [10.7]	11,800 [3.5]	13.00	16.00	77	1,400 [661]
	RCQD-4821(RGPT-07?AMK?)	47,500 [13.9]	35,200 [10.3]	12,300 [3.6]	13.00	15.50	77	1,325 [625]
	RCQD-4821(RGPT-07?BRQ?)	48,500 [14.2]	36,800 [10.8]	11,600 [3.4]	13.00	16.00	77	1,425 [672]
	RCQD-4821(RGPT-10?BRM?)	48,500 [14.2]	36,800 [10.8]	11,600 [3.4]	13.00	16.00	77	1,425 [672]
	RCQD-4821(RGRM-09?ZAJ?)	47,500 [13.9]	36,000 [10.5]	11,800 [3.5]	12.50	15.10	77	1,400 [661]
	RCQD-4821(RGRM-10?ZAJ?)	48,000 [14.1]	36,200 [10.6]	11,600 [3.4]	12.50	15.10	77	1,425 [672]
	RCQD-4821(RGTM-07?RBG?)	48,000 [14.1]	35,600 [10.4]	12,300 [3.6]	13.00	16.00	77	1,325 [625]
	RCQD-4821(RGTM-09?ZAJ?)	48,000 [14.1]	36,200 [10.6]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4821(RHWP-04WMX36A)	45,500 [13.3]	33,100 [9.7]	12,400 [3.6]	12.50	15.10	77	1,300 [613]
	RCQD-4821(RHWP-06WMX48A)	45,500 [13.3]	33,200 [9.7]	12,300 [3.6]	12.50	15.10	77	1,325 [625]
	RCQD-4821(ROCA-070E04)	47,500 [13.9]	35,800 [10.5]	11,800 [3.5]	12.50	15.10	77	1,400 [661]
	RCQD-4821(ROLA-070E04)	48,000 [14.1]	36,000 [10.5]	12,000 [3.5]	13.00	16.00	77	1,375 [649]
	RCQD-4821(ROLA-115E05)	48,500 [14.2]	37,200 [10.9]	11,100 [3.3]	13.00	15.50	77	1,500 [708]
	RCQD-4821+RXMD-C04	48,500 [14.2]	37,600 [11.0]	10,800 [3.2]	12.00	14.50	77	1,550 [731]
	RBHM-25J(RCQD-4824)	49,000 [14.4]	39,000 [11.4]	10,400 [3.0]	13.00	16.00	77	1,600 [755]
	RCQD-4824(RGFE-09?ZCM?)	47,500 [13.9]	35,600 [10.4]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4824(RGFE-10?ZCM?)	47,500 [13.9]	35,800 [10.5]	11,600 [3.4]	13.00	15.50	77	1,425 [672]
	RCQD-4824(RGFE-12?RCM?)	48,000 [14.1]	36,400 [10.7]	11,500 [3.4]	13.00	16.00	77	1,450 [684]
	RCQD-4824(RGFG-09?ZCM?)	47,500 [13.9]	35,600 [10.4]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4824(RGFG-10?ZCM?)	47,500 [13.9]	35,600 [10.4]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4824(RGFG-12?RCM?)	48,000 [14.1]	36,400 [10.7]	11,500 [3.4]	13.00	16.00	77	1,450 [684]
	RCQD-4824(RGJF-09?ZCM?)	47,500 [13.9]	35,800 [10.5]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4824(RGJF-10?ZCM?)	47,500 [13.9]	35,800 [10.5]	11,800 [3.5]	13.00	15.50	77	1,400 [661]
	RCQD-4824(RGJF-12?RCM?)	47,500 [13.9]	35,800 [10.5]	12,000 [3.5]	13.00	16.00	77	1,375 [649]
	RCQD-4824(RGPE-07?BRQ?)	48,000 [14.1]	36,000 [10.5]	11,800 [3.5]	13.00	16.00	77	1,400 [661]
	RCQD-4824(RGPE-10?BRM?)	48,500 [14.2]	37,600 [11.0]	10,800 [3.2]	13.00	16.00	77	1,550 [731]
	RCQD-4824(RGPE-12?ARM?)	48,500 [14.2]	37,400 [11.0]	10,900 [3.2]	13.00	16.00	77	1,525 [720]
	RCQD-4824(RGPT-07?BRQ?)	48,000 [14.1]	37,000 [10.8]	11,300 [3.3]	13.00	16.00	77	1,475 [696]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCQD-4824(RGPT-10?BRM?)	48,000 [14.1]	36,600 [10.7]	11,500 [3.4]	13.00	16.00	77	1,450 [684]
	RCQD-4824(RGPT-12?ARM?)	48,000 [14.1]	36,200 [10.6]	11,800 [3.5]	13.00	16.00	77	1,400 [661]
49	RCQD-4824(RGRM-09?ZAJ?)	47,500 [13.9]	35,600 [10.4]	11,800 [3.5]	12.50	15.10	77	1,400 [661]
	RCQD-4824(RGRM-10?ZAJ?)	47,500 [13.9]	35,800 [10.5]	11,600 [3.4]	12.50	15.10	77	1,425 [672]
	RCQD-4824(RGRM-12?RAJ?)	47,500 [13.9]	36,000 [10.5]	11,600 [3.4]	13.00	15.50	77	1,425 [672]
	RCQD-4824(RGTM-07?RBG?)	47,500 [13.9]	35,200 [10.3]	12,300 [3.6]	13.00	16.00	77	1,325 [625]
	RCQD-4824(RGTM-09?ZAJ?)	48,000 [14.1]	37,400 [11.0]	10,800 [3.2]	13.00	15.50	77	1,550 [731]
	RCQD-4824(RGTM-10?RBJ?)	48,000 [14.1]	36,200 [10.6]	11,600 [3.4]	13.00	16.00	77	1,425 [672]
	RCQD-4824(RHWP-08WRX60A)	46,000 [13.5]	34,650 [10.2]	11,350 [3.3]	12.50	15.10	77	1,475 [696]
	RCQD-4824(RHWP-10WRX60A)	46,000 [13.5]	34,400 [10.1]	11,600 [3.4]	12.50	15.10	77	1,425 [672]
	RCQD-4824(ROCA-070E04)	47,500 [13.9]	35,600 [10.4]	11,800 [3.5]	12.50	15.10	77	1,400 [661]
	RCQD-4824(ROLA-070E04)	47,500 [13.9]	35,600 [10.4]	12,000 [3.5]	13.00	16.00	77	1,375 [649]
	RCQD-4824(ROLA-115E05)	48,000 [14.1]	36,000 [10.5]	11,800 [3.5]	13.00	16.00	77	1,400 [661]
	RCQD-4824+RXMD-C04	48,000 [14.1]	37,800 [11.1]	10,400 [3.0]	12.00	14.50	77	1,600 [755]
	RHKL-HM4821(RCSL-H*4821)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	13.00	16.00	77	1,400 [661]
	RHLL-HM4821(RCSL-H*4821)	46,000 [13.5]	31,400 [9.2]	14,600 [4.3]	13.00	16.00	77	1,400 [661]
	RHSL-HM4821(RCSL-H*4821)	46,000 [13.5]	32,400 [9.5]	13,600 [4.0]	12.00	14.50	77	1,550 [731]
	RHKL-HM4824(RCSL-H*4824)	47,000 [13.8]	33,700 [9.9]	13,300 [3.9]	13.00	16.00	77	1,625 [767]
	RHLL-HM4824(RCSL-H*4824)	47,000 [13.8]	33,700 [9.9]	13,300 [3.9]	13.00	16.00	77	1,625 [767]
	RHSL-HM4824(RCSL-H*4824)	46,000 [13.5]	32,400 [9.5]	13,600 [4.0]	12.00	14.50	77	1,550 [731]
	RHPN-HM4824(RCSN-H*4824)	50,500 [14.8]	39,500 [11.6]	10,900 [3.2]	13.00	16.00	77	1,600 [755]
56	RCFL-H*6024 ①	52,500 [15.4]	37,450 [11.0]	15,050 [4.4]	12.50	14.50	77	1,525 [720]
	RCFL-A*6024	52,500 [15.4]	37,800 [11.1]	15,200 [4.5]	12.00	14.50	77	1,525 [720]
	RCFL-A*6024(RGGE-12?RCM?)	53,500 [15.7]	38,650 [11.3]	14,850 [4.4]	12.00	14.50	77	1,575 [743]
	RCFL-A*6024(RGJF-12?RCM?)	53,500 [15.7]	38,650 [11.3]	14,850 [4.4]	12.00	14.50	77	1,575 [743]
	RCFL-A*6024(RGLE-07?BRQ?)	53,500 [15.7]	38,900 [11.4]	14,600 [4.3]	12.00	14.50	77	1,600 [755]
	RCFL-A*6024(RGLE-10?BRM?)	53,500 [15.7]	38,800 [11.4]	14,700 [4.3]	12.50	15.00	77	1,600 [755]
	RCFL-A*6024(RGLE-12?ARM?)	53,500 [15.7]	38,200 [11.2]	15,300 [4.5]	12.50	15.10	77	1,525 [720]
	RCFL-A*6024(RGLT-12?ARM?)	54,000 [15.8]	40,100 [11.7]	13,900 [4.1]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024(RGPE-07?BRQ?)	53,500 [15.7]	38,850 [11.4]	14,650 [4.3]	12.00	14.50	77	1,600 [755]
	RCFL-A*6024(RGPE-10?BRM?)	53,000 [15.5]	37,750 [11.1]	15,250 [4.5]	12.50	15.00	77	1,550 [731]
	RCFL-A*6024(RGPE-12?ARM?)	53,500 [15.7]	38,200 [11.2]	15,300 [4.5]	12.50	15.10	77	1,525 [720]
	RCFL-A*6024(RGPT-07?BRQ?)	53,500 [15.7]	38,200 [11.2]	15,300 [4.5]	12.50	15.10	77	1,550 [731]
	RCFL-A*6024(RGPT-10?BRM?)	54,000 [15.8]	40,150 [11.8]	13,850 [4.1]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024(RGPT-12?ARM?)	54,000 [15.8]	40,100 [11.7]	13,900 [4.1]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024(RHWP-08WRX60A)	54,000 [15.8]	39,900 [11.7]	14,100 [4.1]	12.50	15.00	77	1,650 [779]
	RCFL-A*6024(RHWP-10WRX60A)	53,500 [15.7]	38,500 [11.3]	15,000 [4.4]	12.50	15.10	77	1,500 [708]
	RCFL-A*6024(ROLA-115E05)	53,000 [15.5]	37,800 [11.1]	15,200 [4.5]	12.00	14.50	77	1,500 [708]
	RCFL-H*6024(RGGE-12?RCM?)	53,500 [15.7]	38,650 [11.3]	14,850 [4.4]	12.00	14.50	77	1,575 [743]
	RCFL-H*6024(RGJF-12?RCM?)	53,500 [15.7]	38,650 [11.3]	14,850 [4.4]	12.00	14.50	77	1,575 [743]
	RCFL-H*6024(RGLE-07?BRQ?)	53,500 [15.7]	38,900 [11.4]	14,600 [4.3]	12.00	14.50	77	1,600 [755]
	RCFL-H*6024(RGLE-10?BRM?)	53,500 [15.7]	38,800 [11.4]	14,700 [4.3]	12.50	15.00	77	1,600 [755]
	RCFL-H*6024(RGLE-12?ARM?)	53,500 [15.7]	38,200 [11.2]	15,300 [4.5]	12.50	15.10	77	1,525 [720]
	RCFL-H*6024(RGLT-12?ARM?)	54,000 [15.8]	40,100 [11.7]	13,900 [4.1]	12.00	14.50	77	1,700 [802]
	RCFL-H*6024(RGPE-07?BRQ?)	53,500 [15.7]	38,850 [11.4]	14,650 [4.3]	12.00	14.50	77	1,600 [755]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*6024(RGPE-10?BRM?)	53,000 [15.5]	37,750 [11.1]	15,250 [4.5]	12.50	15.00	77	1,550 [731]
	RCFL-H*6024(RGPE-12?ARM?)	53,500 [15.7]	38,200 [11.2]	15,300 [4.5]	12.50	15.10	77	1,525 [720]
	RCFL-H*6024(RGPT-07?BRQ?)	53,500 [15.7]	38,200 [11.2]	15,300 [4.5]	12.50	15.10	77	1,550 [731]
	RCFL-H*6024(RGPT-10?BRM?)	54,000 [15.8]	40,150 [11.8]	13,850 [4.1]	12.00	14.50	77	1,700 [802]
	RCFL-H*6024(RGPT-12?ARM?)	54,000 [15.8]	40,100 [11.7]	13,900 [4.1]	12.00	14.50	77	1,700 [802]
	RCFL-H*6024(RHWP-08WRX60A)	54,000 [15.8]	39,900 [11.7]	14,100 [4.1]	12.50	15.00	77	1,650 [779]
	RCFL-H*6024(RHWP-10WRX60A)	53,500 [15.7]	38,500 [11.3]	15,000 [4.4]	12.50	15.10	77	1,500 [708]
	RCFL-H*6024(ROLA-115E05)	53,000 [15.5]	37,800 [11.1]	15,200 [4.5]	12.00	14.50	77	1,500 [708]
	RCFN-H*6024(RGLT-12?ARM?)	54,000 [15.8]	40,100 [11.7]	13,900 [4.1]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RGPT-07?BRQ?)	53,500 [15.7]	38,200 [11.2]	15,300 [4.5]	12.50	15.10	77	1,550 [731]
	RCFN-H*6024(RGPT-10?BRM?)	54,000 [15.8]	40,150 [11.8]	13,850 [4.1]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RGPT-12?ARM?)	54,000 [15.8]	40,100 [11.7]	13,900 [4.1]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RHWP-08WRX60A)	54,000 [15.8]	39,900 [11.7]	14,100 [4.1]	12.50	15.00	77	1,650 [779]
	RCFN-H*6024(RHWP-10WRX60A)	53,500 [15.7]	38,500 [11.3]	15,000 [4.4]	12.50	15.10	77	1,500 [708]
	RCFN-H*6024(ROLA-115E05)	53,000 [15.5]	37,800 [11.1]	15,200 [4.5]	12.00	14.50	77	1,500 [708]
	RBHP-24(RCHL-48A1)	49,500 [14.5]	33,950 [9.9]	15,550 [4.6]	11.50	14.00	77	1,600 [755]
	RBHP-25(RCHL-60A1)	50,000 [14.6]	35,900 [10.5]	14,100 [4.1]	11.50	14.00	77	1,800 [849]
	RCQD-6024	49,000 [14.4]	34,100 [10.0]	14,900 [4.4]	11.00	13.50	77	1,600 [755]
	RCQD-6024(RGFE-09?ZCM?)	48,500 [14.2]	32,100 [9.4]	16,400 [4.8]	11.50	14.00	77	1,400 [661]
	RCQD-6024(RGFE-10?ZCM?)	49,000 [14.4]	32,800 [9.6]	16,200 [4.7]	11.50	14.00	77	1,425 [672]
56	RCQD-6024(RGFE-12?RCM?)	49,000 [14.4]	32,900 [9.6]	16,100 [4.7]	11.50	14.00	77	1,450 [684]
	RCQD-6024(RGFG-09?ZCM?)	49,000 [14.4]	33,450 [9.8]	15,550 [4.6]	12.00	14.00	77	1,400 [661]
	RCQD-6024(RGFG-10?ZCM?)	49,000 [14.4]	33,450 [9.8]	15,550 [4.6]	12.00	14.00	77	1,400 [661]
	RCQD-6024(RGFG-12?RCM?)	49,500 [14.5]	34,200 [10.0]	15,300 [4.5]	12.00	14.50	77	1,450 [684]
	RCQD-6024(RGJF-09?ZCM?)	49,000 [14.4]	32,550 [9.5]	16,450 [4.8]	11.50	14.00	77	1,400 [661]
	RCQD-6024(RGJF-10?ZCM?)	49,000 [14.4]	32,600 [9.6]	16,400 [4.8]	11.50	14.00	77	1,400 [661]
	RCQD-6024(RGJF-12?RCM?)	50,000 [14.6]	34,900 [10.2]	15,100 [4.4]	11.50	14.00	77	1,575 [743]
	RCQD-6024(RGPE-07?BRQ?)	49,000 [14.4]	32,500 [9.5]	16,500 [4.8]	12.00	14.50	77	1,400 [661]
	RCQD-6024(RGPE-10?BRM?)	49,000 [14.4]	32,500 [9.5]	16,500 [4.8]	12.00	14.50	77	1,400 [661]
	RCQD-6024(RGPE-12?ARM?)	49,500 [14.5]	33,150 [9.7]	16,350 [4.8]	12.00	14.50	77	1,425 [672]
	RCQD-6024(RGPT-07?BRQ?)	49,500 [14.5]	34,850 [10.2]	14,650 [4.3]	12.00	14.50	77	1,550 [731]
	RCQD-6024(RGPT-10?BRM?)	49,000 [14.4]	33,900 [9.9]	15,100 [4.4]	11.50	14.00	77	1,450 [684]
	RCQD-6024(RGPT-12?ARM?)	48,500 [14.2]	33,000 [9.7]	15,500 [4.5]	12.00	14.50	77	1,400 [661]
	RCQD-6024(RGRM-12?RAJ?)	49,000 [14.4]	32,750 [9.6]	16,250 [4.8]	11.50	14.00	77	1,425 [672]
	RCQD-6024(RHWP-08WRX60A)	50,000 [14.6]	35,000 [10.3]	15,000 [4.4]	12.50	15.00	77	1,475 [696]
	RCQD-6024(RHWP-10WRX60A)	50,000 [14.6]	34,700 [10.2]	15,300 [4.5]	12.50	15.00	77	1,425 [672]
	RCQD-6024(ROLA-070E04)	48,500 [14.2]	32,950 [9.7]	15,550 [4.6]	11.50	14.00	77	1,375 [649]
	RCQD-6024(ROLA-115E05)	49,000 [14.4]	34,450 [10.1]	14,550 [4.3]	11.50	14.00	77	1,500 [708]
	RHKL-HM6024(RCSL-H*6024)	54,000 [15.8]	39,150 [11.5]	14,850 [4.4]	13.00	16.00	77	1,600 [755]
	RHLL-HM6024(RCSL-H*6024)	54,000 [15.8]	39,100 [11.5]	14,900 [4.4]	13.00	16.00	77	1,550 [731]
	RHSL-HM6024(RCSL-H*6024)	53,500 [15.7]	40,200 [11.8]	13,300 [3.9]	11.50	13.50	77	1,750 [826]
60	RCFL-H*6024+RXMD-C04 ①	59,500 [17.4]	41,000 [12.0]	18,500 [5.4]	12.00	14.50	77	1,600 [755]
	RCFL-A*6024(RGLT-10?BRM?)	60,000 [17.6]	42,500 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024(RGLT-12?ARM?)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024(RGPT-07?BRQ?)	60,000 [17.6]	42,500 [12.5]	17,500 [5.1]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024(RGPT-10?BRM?)	60,000 [17.6]	42,500 [12.5]	17,500 [5.1]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024(RGPT-12?ARM?)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024(RHWP-10WRX60A)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFL-A*6024+RXMD-C04	59,500 [17.4]	41,000 [12.0]	18,500 [5.4]	12.00	14.50	77	1,600 [755]
	RCFL-H*6024(RGLT-10?BRM?)	60,000 [17.6]	42,500 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Performance Data @ AHRI Standard Conditions—Cooling

Model Numbers		80°F [26.5°C] DB/67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air					Sound Rating dB	Indoor CFM [L/s]
Outdoor Unit 14AJM	Indoor Coil and/or Air Handler	Total Capacity BTU/H [kW]	Net Sensible BTU/H [kW]	Net Latent BTU/H [kW]	EER	SEER		
Rev. 6/14/12	RCFL-H*6024(RGLT-12?ARM?)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFL-H*6024(RGPT-07?BRQ?)	60,000 [17.6]	42,500 [12.5]	17,500 [5.1]	12.00	14.50	77	1,700 [802]
	RCFL-H*6024(RGPT-10?BRM?)	60,000 [17.6]	42,500 [12.5]	17,500 [5.1]	12.00	14.50	77	1,700 [802]
60	RCFL-H*6024(RGPT-12?ARM?)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFL-H*6024(RHWP-10WRX60A)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RGLT-10?BRM?)	60,000 [17.6]	42,500 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RGLT-12?ARM?)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RGPT-07?BRQ?)	60,000 [17.6]	42,500 [12.5]	17,500 [5.1]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RGPT-10?BRM?)	60,000 [17.6]	42,500 [12.5]	17,500 [5.1]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RGPT-12?ARM?)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RCFN-H*6024(RHWP-10WRX60A)	60,500 [17.7]	42,800 [12.5]	17,700 [5.2]	12.00	14.50	77	1,700 [802]
	RBHP-25(RCHL-60A1)	58,500 [17.1]	39,000 [11.4]	19,500 [5.7]	11.50	14.00	77	1,800 [849]
	RBHM-26J(RCQD-6024)	59,500 [17.4]	42,000 [12.3]	17,500 [5.1]	12.00	14.50	77	1,700 [802]
	RCQD-6024(RGFE-12?RCM?)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,625 [767]
	RCQD-6024(RGFG-12?RCM?)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,625 [767]
	RCQD-6024(RGJF-09?ZCM?)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,600 [755]
	RCQD-6024(RGJF-12?RCM?)	55,500 [16.3]	36,100 [10.6]	19,400 [5.7]	11.00	13.50	77	1,575 [743]
	RCQD-6024(RGPE-07?BRQ?)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,600 [755]
	RCQD-6024(RGPE-10?BRM?)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,625 [767]
	RCQD-6024(RGPE-12?ARM?)	56,000 [16.4]	38,000 [11.1]	18,000 [5.3]	11.50	14.00	77	1,625 [767]
	RCQD-6024(RGPT-07?BRQ?)	59,000 [17.3]	41,500 [12.2]	17,500 [5.1]	11.00	13.50	77	1,725 [814]
	RCQD-6024(RGPT-10?BRM?)	59,000 [17.3]	41,500 [12.2]	17,500 [5.1]	11.00	13.50	77	1,725 [814]
	RCQD-6024(RGPT-12?ARM?)	59,000 [17.3]	41,500 [12.2]	17,500 [5.1]	12.00	14.00	77	1,725 [814]
	RCQD-6024(RGRM-12?RAJ?)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,625 [767]
	RCQD-6024(RGTM-07?RBG?)	58,000 [17.0]	40,000 [11.7]	18,000 [5.3]	11.00	13.50	77	1,675 [790]
	RCQD-6024(RGTM-09?ZAJ?)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,600 [755]
	RCQD-6024(RGTM-10?RBJ?)	58,500 [17.1]	40,500 [11.9]	18,000 [5.3]	11.00	13.50	77	1,675 [790]
	RCQD-6024(RHWP-08WRX60A)	57,000 [16.7]	39,800 [11.7]	17,200 [5.0]	11.50	13.50	77	1,675 [790]
	RCQD-6024(RHWP-10WRX60A)	57,500 [16.8]	40,700 [11.9]	16,800 [4.9]	11.50	14.00	77	1,725 [814]
	RCQD-6024(ROLA-070E04)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,600 [755]
	RCQD-6024(ROLA-115E05)	58,000 [17.0]	39,500 [11.6]	18,500 [5.4]	11.00	13.50	77	1,600 [755]
	RCQD-6024+RXMD-C04	56,500 [16.6]	39,500 [11.6]	17,000 [5.0]	11.00	13.50	77	1,600 [755]
	RHKL-HM6024(RCSL-H*6024)	61,500 [18.0]	44,000 [12.9]	17,500 [5.1]	12.50	15.00	77	1,800 [849]
	RHLL-HM6024(RCSL-H*6024)	61,500 [18.0]	44,000 [12.9]	17,500 [5.1]	12.50	15.00	77	1,800 [849]
	RHSL-HM6024(RCSL-H*6024)	60,000 [17.6]	42,850 [12.6]	17,150 [5.0]	11.50	13.50	77	1,750 [826]

① Highest sales volume tested combination required by D.O.E. test procedures.

[] Designates Metric Conversions

Electrical and Physical Data

Model Number 14AJM	ELECTRICAL							PHYSICAL						
	Phase Frequency (Hz) Voltage (Volts)	Compressor		Fan Motor Full Load Amperes (FLA)	Minimum Circuit Ampacity Amperes	Fuse or HACR Circuit Breaker		Outdoor Coil			Refrig. Per Circuit Oz. [g]	Weight		
		Rated Load Amperes (RLA)	Locked Rotor Amperes (LRA)			Minimum Amperes	Maximum Amperes	Face Area Sq. Ft. [m²]	No. Rows	CFM [L/s]		Net Lbs. [kg]	Shipping Lbs. [kg]	
Rev. 6/14/2012														
18	1-60-208/230	9/9	48	0.8	12/12	15/15	20/20	16.39 [1.52]	1	2805[1324]	112 [3175]	154 [69.9]	171 [69.9]	
24	1-60-208/230	13.5/13.5	58.3	0.8	18/18	25/25	30/30	16.39 [1.52]	1	2805[1324]	105.6 [2994]	154 [69.9]	171 [69.9]	
30	1-60-208/230	12.8/12.8	64	1.4	18/18	25/25	30/30	16.39 [1.52]	1	2915[1376]	112 [3175]	157 [71.2]	175 [71.2]	
36	1-60-208/230	16.7/16.7	79	1.9	23/23	30/30	35/35	21.85 [2.03]	1	3435[1621]	130.4 [3697]	181 [82.1]	201 [82.1]	
42	1-60-208/230	17.9/17.9	112	2.8	26/26	30/30	40/40	21.85 [2.03]	1	3550[1675]	145.12 [4114]	205 [93]	225 [93]	
48	1-60-208/230	21.8/21.8	117	2.8	31/31	40/40	50/50	21.85 [2.03]	2	4310[2034]	216 [6124]	249 [112.9]	269 [112.9]	
49	1-60-208/230	19.9/19.9	109	1.9	27/27	35/35	45/45	21.85 [2.03]	2	3615[1706]	213 [6039]	249 [112.9]	269 [112.9]	
56	1-60-208/230	21.4/21.4	135	1.9	29/29	35/35	50/50	21.85 [2.03]	2	3615[1706]	241 [6832]	254 [115.2]	274 [115.2]	
60	1-60-208/230	26.4/26.4	134	2.8	36/36	45/45	60/60	21.85 [2.03]	2	4310[2034]	240 [6804]	254 [115.2]	274 [115.2]	


NOTE: Factory Refrigerant Charge includes refrigerant for 15 feet of standard line set.

[] Designates Metric Conversions

Unit Dimensions

Model No. 14AJM	Unit Dimensions		
	Width "W" Inches [mm]	Length "L" Inches [mm]	Height "H" Inches [mm]
18, 24, 30	31 ⁵ / ₈ [803]	31 ⁵ / ₈ [803]	27 ³ / ₈ [695]
36, 42, 48, 49, 56, 60	31 ⁵ / ₈ [803]	31 ⁵ / ₈ [803]	35 ³ / ₈ [899]

[] Designates Metric Conversions

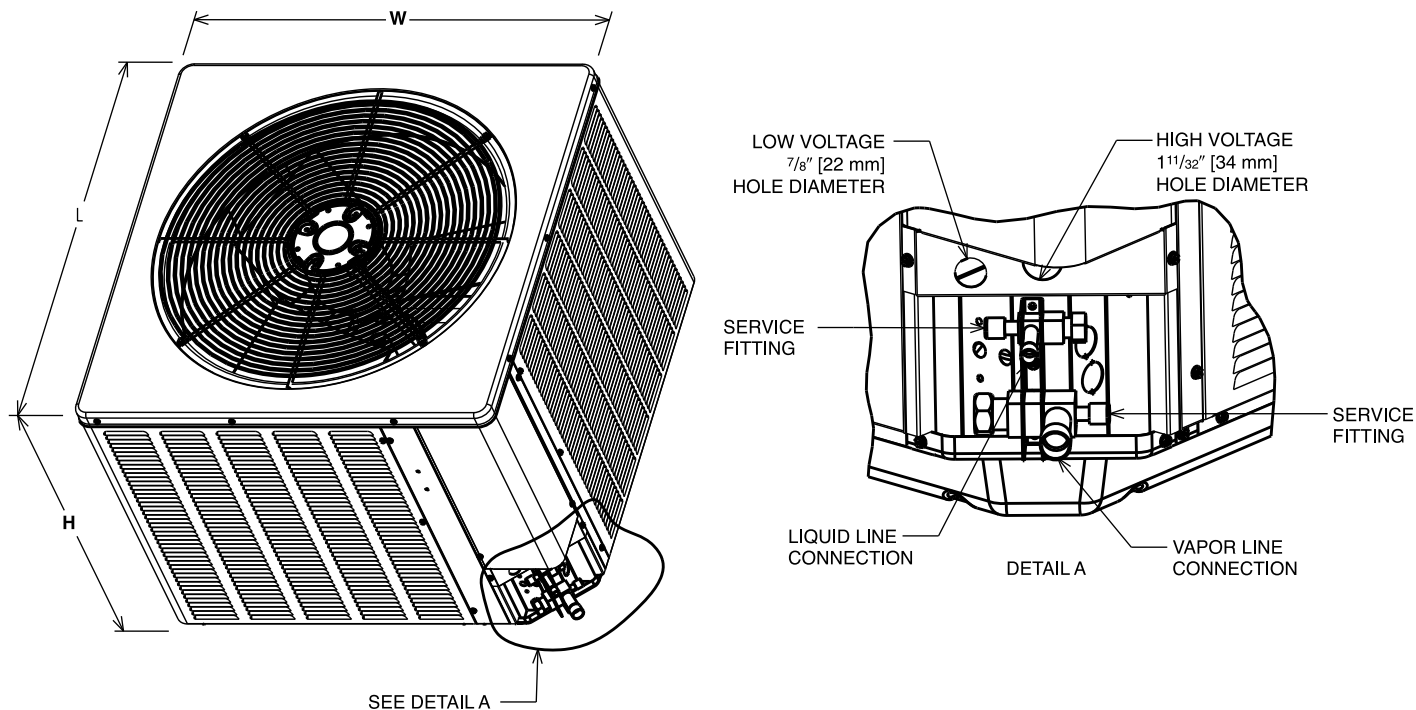

NOTE: Illustrations show the deep drawn baspan.

Condensing Unit Refrigerant Line Size Information

Liquid Line Sizing (R-410A)														
System Capacity	Liquid Line Connection Size (Inch I.D.)	Line Size (Inch O.D.) [mm]	Liquid Line Size – Outdoor Unit Above Indoor Coil (Cooling Only—Does not apply to Heat Pumps)						Liquid Line Size – Outdoor Unit Below Indoor Coil					
			Total Equivalent Length—Feet [m]						Total Equivalent Length—Feet [m]					
			25 [7.62]	50 [15.24]	75 [22.86]	100 [30.48]	125 [38.10]	150 [45.72]	25 [7.62]	50 [15.24]	75 [22.86]	100 [30.48]	125 [38.10]	150 [45.72]
			Minimum Vertical Separation—Feet [m]						Maximum Vertical Separation—Feet [m]					
1½ Ton	3/8" [9.53]	1/4 [6.35]	0	0	0	0	8 [2.44]	24 [7.32]	25 [7.62]	40 [12.19]	25 [7.62]	9 [2.74]	N/A	N/A
		5/16 [7.94]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	62 [18.90]	58 [17.68]	53 [16.15]	49 [14.94]
		3/8* [9.53]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	75 [22.86]	72 [21.95]	70 [21.34]	68 [20.73]
2 Ton	3/8" [9.53]	1/4 [6.35]	0	3 [0.91]	29 [8.84]	55 [16.76]	81 [24.69]	108 [32.92]	23 [7.01]	N/A	N/A	N/A	N/A	N/A
		5/16 [7.94]	0	0	0	0	0	0	25 [7.62]	36 [10.97]	29 [8.84]	23 [7.01]	16 [4.88]	9 [2.74]
		3/8* [9.53]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	72 [21.95]	70 [21.34]	68 [20.73]	65 [19.81]
2½ Ton	3/8" [9.53]	1/4 [6.35]	0	14 [4.27]	56 [17.07]	98 [29.87]	N/A	N/A	25 [7.62]	N/A	N/A	N/A	N/A	N/A
		5/16 [7.94]	0	0	0	0	0	0	25 [7.62]	49 [14.94]	38 [11.58]	27 [8.23]	17 [5.18]	6 [1.83]
		3/8* [9.53]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	68 [20.73]	65 [19.81]	62 [18.90]	58 [17.68]
3 Ton	3/8" [9.53]	5/16 [7.94]	0	0	0	0	0	9 [2.74]	25 [7.62]	50 [15.24]	37 [11.28]	22 [6.71]	7 [2.13]	N/A
		3/8* [9.53]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	68 [20.73]	63 [19.20]	58 [17.68]	53 [16.15]
3½ Ton	3/8" [9.53]	5/16 [7.94]	0	0	0	16 [4.88]	35 [10.67]	54 [16.46]	25 [7.62]	23 [7.01]	4 [1.22]	N/A	N/A	N/A
		3/8* [9.53]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	43 [13.11]	36 [10.97]	30 [9.14]	24 [7.32]
4 Ton	3/8" [9.53]	3/8* [9.53]	0	0	0	0	0	0	25 [7.62]	46 [14.02]	38 [11.58]	30 [9.14]	22 [6.71]	15 [4.57]
		1/2 [12.57]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	56 [17.07]	55 [16.76]	53 [16.15]	52 [15.85]
5 Ton	3/8" [9.53]	3/8* [9.53]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	56 [17.07]	44 [13.41]	32 [9.75]	20 [6.10]
		1/2 [12.57]	0	0	0	0	0	0	25 [7.62]	50 [15.24]	75 [22.86]	81 [24.69]	79 [24.08]	76 [23.16]

NOTES: *Standard line size
N/A = Application not recommended.

Suction Line Length/Size versus Capacity Multiplier (R-410A)								
Unit Size	1½ Ton	2 Ton	2½ Ton	3 Ton	3½ Ton	4 Ton	5 Ton	
Suction Line Connection Size	3/4" [19.05] I.D.					7/8" [22.23] I.D.		
Suction Line Run—Feet [m]	5/8" [15.88 mm] O.D. Optional 3/4" [19.05 mm] O.D. Standard*		5/8" [15.88 mm] O.D. Optional 3/4" [19.05 mm] O.D. Standard* 7/8" [22.23 mm] O.D. Optional		3/4" [19.05 mm] O.D. Optional 7/8" [22.23 mm] O.D. Standard*		7/8" [22.23 mm] O.D. Optional 1 1/8" [28.58 mm] O.D. Standard*	
25' [7.62]	Optional Standard Optional	1.00 1.00 —	1.00 1.00 —	1.00 1.00 1.00	1.00 1.00 —	1.00 1.00 —	1.00 1.00 —	1.00 1.00 —
50' [15.24]	Optional Standard Optional	.98 .99 —	.98 .99 —	.96 .98 .99	.98 .99 —	.99 .99 —	.99 .99 —	.99 .99 —
100' [30.48]	Optional Standard Optional	.95 .96 —	.95 .96 —	.94 .96 .97	.96 .97 —	.96 .98 —	.96 .98 —	.97 .98 —
150' [45.72]	Optional Standard Optional	.92 .93 —	.92 .94 —	.91 .93 .95	.94 .95 —	.94 .96 —	.95 .96 —	.94 .97 —

NOTES: *Standard line size
Using suction line larger than shown in chart will result in poor oil return and is not recommended.
3 Ton Suction Line Connection is 3/4"

[] Designates Metric Conversions

GENERAL TERMS OF LIMITED WARRANTY*

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Conditional Parts (Registration Required)	Ten (10) Years
--	----------------



The new degree of comfort.™

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Heating, Cooling & Water Heating • P.O. Box 17010
Fort Smith, Arkansas 72917 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5



INTEGRATED HOME COMFORT

PRINTED IN U.S.A 06/12 QG FORM NO. A11-215