



## BEFORE YOU BEGIN

- Carefully inspect the new toilet for damage.
- If the existing toilet does not have a supply shut-off valve below the tank, install one before installing the new toilet.

### ⚠ CAUTION


#### Risk of personal injury or product damage.

Handle with care. Vitreous china can break or chip if the product is handled carelessly.


## TOOLS AND MATERIALS




10 " Adjustable wrench



Sponge




1/2" Nut driver/socket



Supply shut-off valve




Wax seal




Hacksaw




Tape measure




5/16" Bolts w/nuts and washers



Screwdriver



Level




Putty knife



## 1. REMOVING THE EXISTING TOILET


- Turn off water supply.
- Flush toilet, then sponge out all remaining water from the tank.

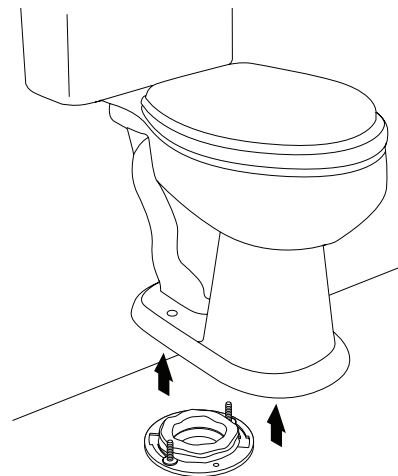

- Disconnect supply shut-off valve (if present), and remove old tank and bowl.


### ⚠ CAUTION

**Risk of hazardous gases.**  
If the new toilet is not installed immediately, temporarily stuff a rag in the closet flange.

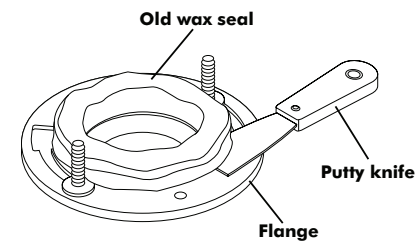

- Remove old wax seal from floor with a putty knife.

5/16" Diameter bolts



- Replace old bolts with the new 5/16" diameter bolts.