



K-302-K

Widespread 1/2" ceramic in-wall two-handle valve system with 8" centers

Features

- 1/2" (12.7 mm) quarter-turn washerless ceramic disc valves
- 8.4 gpm (31.8 lpm) flow rate
- For use with 8" (200 mm) widespread, two-handle wall-mount faucets
- Requires valve trim (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

^{NA} NA Not Applicable



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 1:11 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1

Valves

Included Valves: Ceramic disc, Transfer

Shower Valve

Flow Rate Maximum @ 45 psi: 12 gpm (45.4 l/min)

Manufacturer's Minimum 11 gpm (41.6 l/min)

Rated Flow:

Pressure: 45 psi (3.1 bar)

Maximum Static Pressure: 125 psi (8.6 bar)

Minimum Operating Pressure: 20 psi (1.4 bar)

Material

- Brass valve bodies

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 1:11 - US-CA

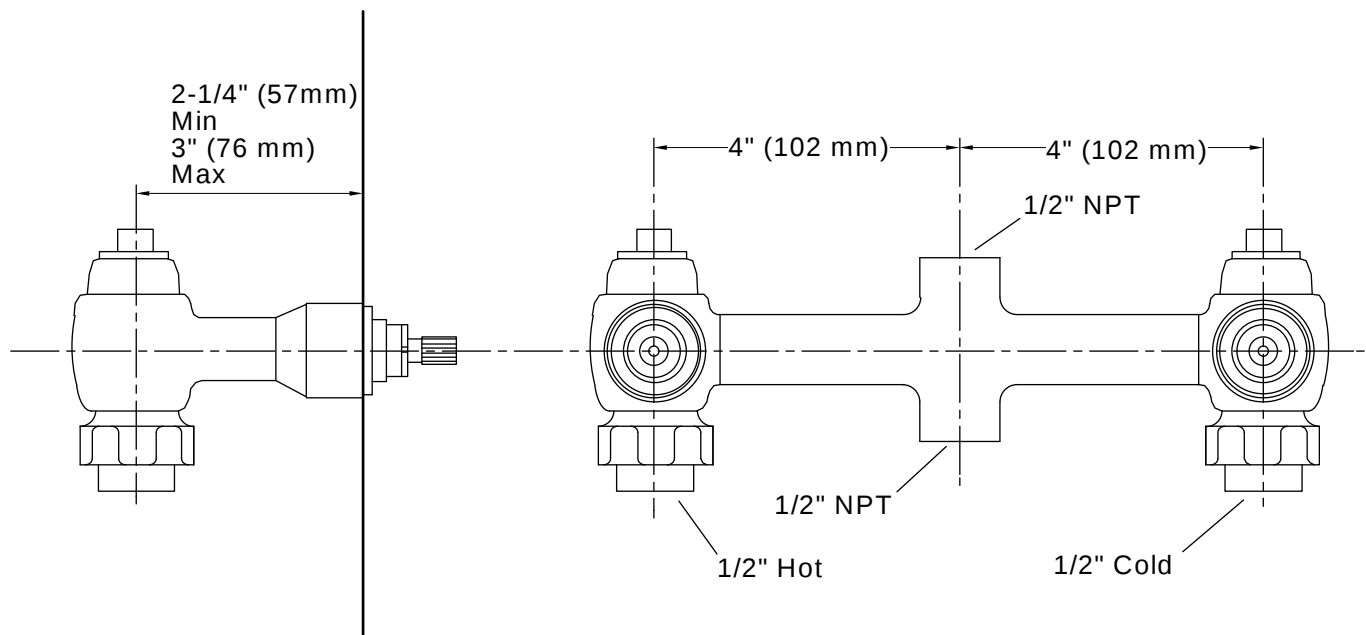

Installation

- Wall-mount
- For 8" (203 mm) centers

Installation Notes

Install this product according to the installation instructions.

