



## Broan Elite EW58

**Inspiring traditional European design.**  
This wonderful design is executed to meet today's needs so that everyone can achieve their dream.



Make-Up Air  
Damper  
Models MD6T,  
MD8T



Model BCR1

An optional remote control with magnetic base enables operation of blower speed, lighting and delay-off feature from across the room.



## Broan Elite EW56

**Elegant European curved glass design that is both beautiful and functional.**  
The airy design is a stunning focal point that complements its surrounding perfectly.



Make-Up Air  
Damper  
Models MD6T,  
MD8T



Model BCR1

An optional remote control with magnetic base enables operation of blower speed, lighting and delay-off feature from across the room.



## Broan Elite RM53000

Rangemaster


**Contemporary lines for a one-of-a-kind kitchen.**  
Clean lines complement the contemporary kitchen or boldly contrast the flowing styles of more traditional settings.



Make-Up Air  
Damper  
Models MD6TU,  
MD8TU

- Traditional Italian design with high-performance features.
- Available in brushed stainless steel.
- Two widths 30" & 36"; in a 19-3/4" depth.
- Powerful 500 CFM internal blower.
- Bright dual halogen lighting; 3-intensity settings (lamps included).
- 3-Speed electronic push button control with blue speed selection indication.
- Control features include Delay-off and Filter clean reminder.
- Optional Remote Control Operation—BCR1.

- Quick release aluminum mesh filters.
- Designed to work with Broan Automatic Make-up air dampers.
- Heat Sentry™ detects excessive heat and adjusts blower speed automatically.
- Telescopic flue accommodates ceiling heights 8' to 9'; custom lengths upon demand.

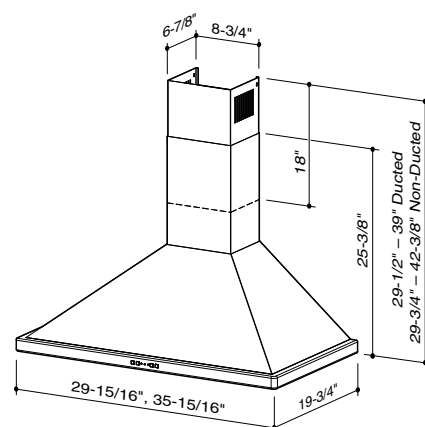

#### Range Hood Specifications

WIDTH	STAINLESS STEEL	BLOWER	VOLTS	AMPS	CFM	SONES	DUCT
30"	EW5830SS	Internal	120	3.05	500/200	10.5/2.5	6" RD
36"	EW5836SS	Internal	120	3.05	500/200	10.5/2.5	6" RD

\* Optional flue extension for 10' ceiling—extensions over 10' have up to a 14-week order time.

\*Optional flue extension for either ducted or non-ducted 9 to 10' ceilings.


\*\*Includes non-ducted filter & flex duct.

#### Optional Accessories

FLUE EXTENSION*	NON-DUCTED KIT**	NON-DUCTED FILTER	REMOTE CONTROL	MAKE-UP AIR DAMPER
FXNE58SS	RKE58	FILTERE56	BCR1	MD6T, MD8T
FXNE58SS	RKE58	FILTERE56	BCR1	MD6T, MD8T

- Contemporary Italian Glass Canopy design.
- Available in brushed stainless steel.
- Two widths 30" & 35-7/16"; in a 19-3/4" depth.
- Powerful 500 CFM internal blower.
- Bright dual halogen lighting; 3-intensity settings (lamps included).
- 3-Speed electronic push button control with blue speed selection indication.
- Control features include Delay-off and Filter clean reminder.
- Optional Remote Control Operation—BCR1.

- Quick release aluminum mesh filters.
- Designed to work with Broan Automatic Make-up air dampers.
- Heat Sentry™ detects excessive heat and adjusts blower speed automatically.
- Telescopic flue accommodates ceiling heights 8' to 9'; custom lengths upon demand.

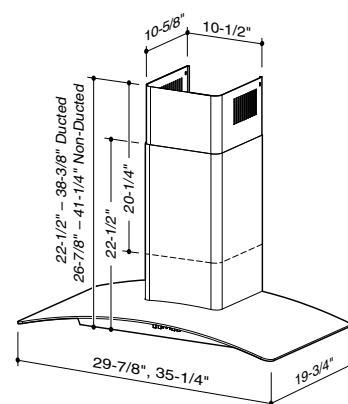

#### Range Hood Specifications

WIDTH	STAINLESS STEEL	BLOWER	VOLTS	AMPS	CFM	SONES	DUCT
30"	EW5630SS	Internal	120	2.88	500/200	10.5/2.5	6" RD
35-7/16"	EW5636SS	Internal	120	2.88	500/200	10.5/2.5	6" RD

\* Optional flue extension for 10' ceiling—extensions over 10' have up to a 14-week order time.

\*Optional flue extension for either ducted or non-ducted 9 to 10' ceilings.

\*\*Includes non-ducted filter & flex duct.


#### Optional Accessories

FLUE EXTENSION*	NON-DUCTED KIT**	NON-DUCTED FILTER	REMOTE CONTROL	MAKE-UP AIR DAMPER
FXNE56SS	RKE56	FILTERE56	BCR1	MD6T, MD8T
FXNE56SS	RKE56	FILTERE56	BCR1	MD6T, MD8T

- Multi-speed slide control.
- 370 CFM internal blower (<300 CFM with ARP6).
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- Two 25 watt halogen lamps included (one level).
- Dishwasher-safe aluminum filters feature a quick-release latch and professional-style appearance.
- Ducted/non-ducted telescopic flue accommodates ceiling heights from

8 to 9 feet. Flue extensions for higher ceilings are also available for ducted and non-ducted applications.\*

- Requires separate purchase of a non-ducted kit (RRK51) for indoor exhaust recirculation.
- Install hood so that the bottom of the unit is 24 to 30 inches above the cooking surface. Mounting height is determined by ceiling height.

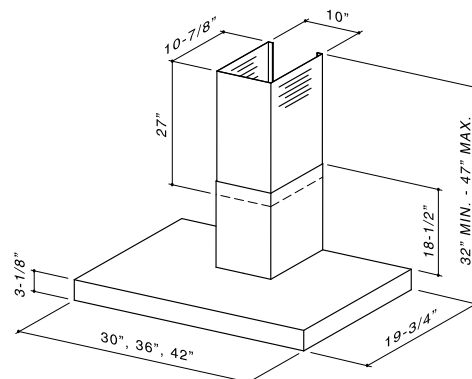

#### Range Hood Specifications

WIDTH	STAINLESS STEEL	VOLTS	AMPS	CFM	SONES	DUCT
30"	RM533004	120	2.6	370*	7.0	6" RD
36"	RM533604	120	2.6	370*	7.0	6" RD
42"	RM534204	120	2.6	370*	7.0	6" RD

\* Optional flue extension for 10' ceiling—extensions over 10' have up to a 14-week order time.

\*\* Includes non-ducted filter.

\* 299 CFM max with ARP6 reducer plate option.

#### Optional Accessories

FLUE EXTENSION*	NON-DUCTED FLUE EXTENSION*	NON-DUCTED KIT**	NON-DUCTED FILTER	MAKE-UP AIR DAMPER
RFX5304	RFXN5304	RRK51	FILTERSQUARE	MD6TU, MD8TU
RFX5304	RFXN5304	RRK51	FILTERSQUARE	MD6TU, MD8TU
RFX5304	RFXN5304	RRK51	FILTERSQUARE	MD6TU, MD8TU