



Product Data Sheet (2015-12-23)

Flexconsole



Advantages

With the Flexconsole, the Flexcon vessel is set up vertically, fitted to the water connection, with the water nipple fitted on connection B of the console and the expansion pipe fitted to connection A. Equipped with a wall plate with two slots for accurate wall mounting.

Technical specification

- Suitable for water, max. 50% glycol.
- Temperature range from -10 °C to 120 °C.
- Maximum working pressure is 10 bar and minimum working pressure is 0.2 bar.
- In accordance with ANSI/ASME B1.20.1.
- Application: 97975 only suitable for hydronic systems.

97976 suitable for potable water.

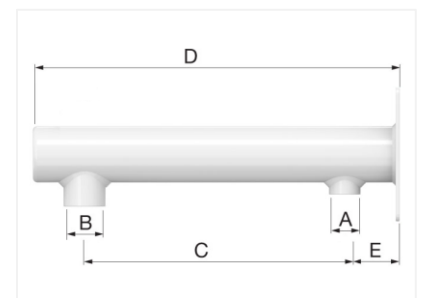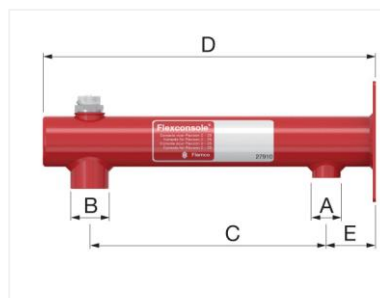

| Type | Connection | | Dimensions | | | Color | Material | Order code |
|---------------------------------|------------|--------|------------|----------|----------|-------|-----------------|------------|
| | A | B | C ["] | D ["] | E ["] | | | |
| Flexconsole 1/2NPT x 1/2NPT | ½" NPT | ½" NPT | 7,67 | 10,83 | 1,61 | Red | Steel | 97975 |
| Flexconsole 3/4NPT x 1/2NPT SST | ½" NPT | ¾" NPT | 7,67 | 10,83 | 1,61 | White | Stainless steel | 97976 |

Flamco Group
Amersfoortseweg 9
3751 LJ, Bunschoten - Netherlands
T 033-299 75 00
F 033-298 64 45
E info@flamcogroup.com
I www.flamcogroup.com