


PRODUCT SPECIFICATION DRAWING

HOLDRITE® #707-E POP-UP™

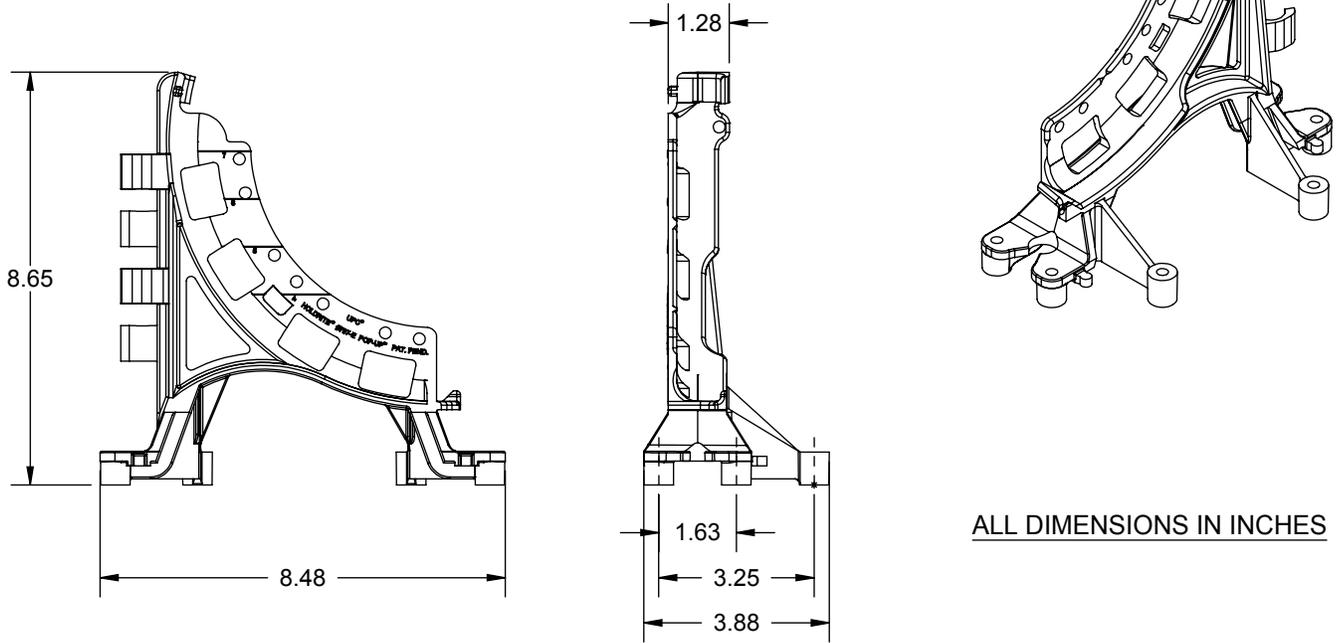

ALL DIMENSIONS IN INCHES

The HOLDRITE® #707-E POP-UP™ supports flexible pipe and tubing lines or rigid conduit up to 1-1/4" IPS in a 90° pattern. Ideal for positioning in-slab piping prior to concrete slab pouring. For elevated slabs, nail or screw bracket to form decking or edge form. For slab-on-grade (ground work), secure bracket with #4 rebar driven into the ground. Piping is attached to bracket with zip ties (3 included).

Product Information:

- Material: Reinforced Polypropylene
- Temperature range "post install": -10°F to +190°F
- Load rating: 25 pounds
- Patent Pending

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

HOLDRITE®

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONSSM

800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM
spec_707-E_RevD

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	