

Features

- Brass construction.
- Brass valve bodies.
- Quarter-turn washerless ceramic disc valves.
- Pop-up drain with lift rod and tailpiece.
- Variety of handle style options.
- For 4" (102 mm) centers.
- Standard aerator.
- 5-1/4" (133 mm) gooseneck spout.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

Required Accessories

K- 16010-2 Standard Handles for Centerset Base Faucet

or

K- 16010-3 Cross Handles for Centerset Base Faucet

or

K- 16010-4 Lever Handles for Centerset Base Faucet

or

K- 16010-5 Wristblade Lever Handles for Centerset Base Faucet

Optional Accessories

1160595 .35 gpm Aerator, Medium



Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372


DOE - Energy Policy Act 1992

EPA WaterSense®

All applicable US Federal and State material regulations

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

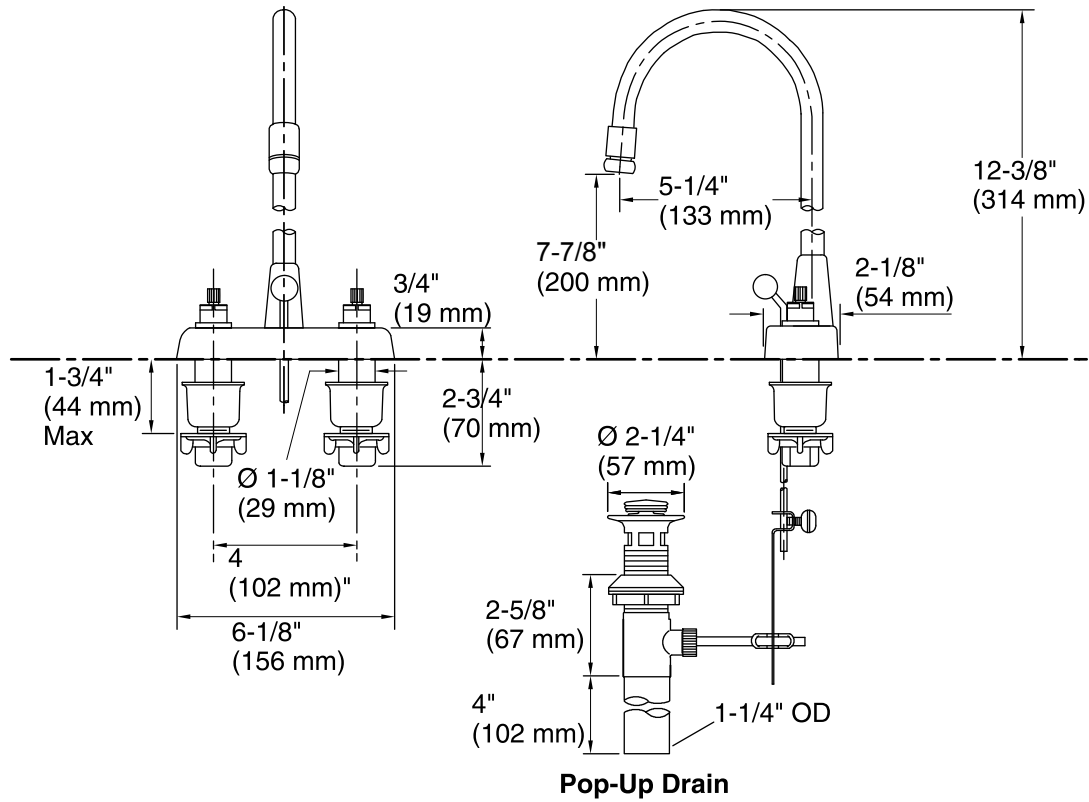

Pop-Up Drain

Technical Information

All product dimensions are nominal.

Spout reach: 5-1/4" (133 mm)

Drain included: YES

Drain tailpiece included:

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.