

CPVC STRAPS



FUNCTION: Designed to support CPVC pipe horizontally from the side or bottom of beam, or composite wood joists with a minimum of 3/8" web thickness. Fig. 076 can only be used as a guide on top of beam or on vertical piping. Fig. 076 may be installed onto wood using supplied fasteners or into, minimum 18 gauge, steel using two 1/4" X 1" tek type screws. Features flared edges to protect piping as it slides through the installed fitting.

SIZE: 3/4" Through 2" CPVC pipe


FINISH: Pre-galvanized

MATERIAL: Carbon Steel

APPROVALS: Underwriters Laboratories listed for US and Canada

ORDERING: Specify pipe size and model number.

Fig. 076
CPVC TWO-HOLE
STAND OFF STRAP

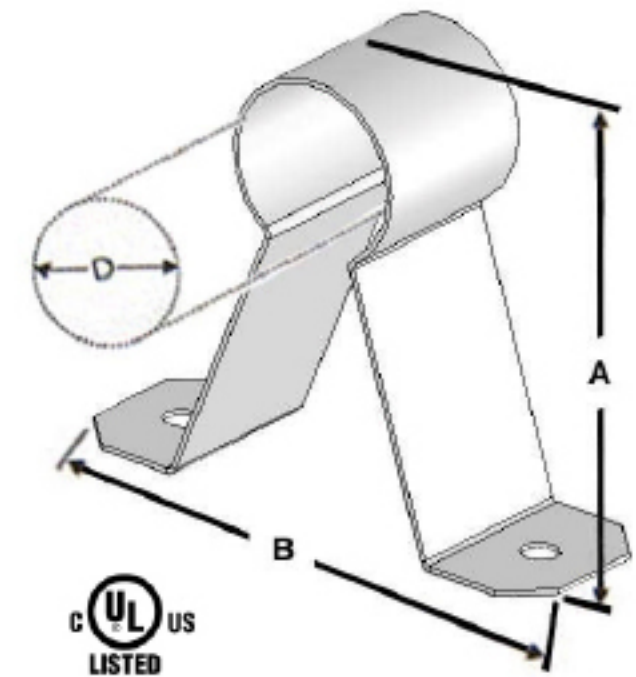

| Pipe Size | A | B | D | Material Size | Box Qty. | Max Spacing | Appx. Wt. Per 100 (lbs.) |
|-------------------------------|---------------------------------|-------------------------------|-------|--|----------|-------------|--------------------------|
| 3/4 | 2 ⁹ / ₁₆ | 4 ¹ / ₄ | 1.050 | 20 ga. X 1 ¹ / ₈ " | 100 | 5'-6" | 12.10 |
| 1 | 2 ¹³ / ₁₆ | 4 ¹ / ₂ | 1.315 | 20 ga. X 1 ¹ / ₈ " | 100 | 6'-0" | 12.80 |
| 1 ¹ / ₄ | 3 ³ / ₁₆ | 4 ⁵ / ₈ | 1.660 | 20 ga. X 1 ¹ / ₈ " | 100 | 6'-6" | 14.10 |
| 1 ¹ / ₂ | 3 ⁷ / ₁₆ | 5 | 1.990 | 20 ga. X 1 ¹ / ₈ " | 100 | 7'-0" | 15.20 |
| 2 | 3 ⁷ / ₈ | 5 | 2.375 | 20 ga. X 1 ¹ / ₈ " | 100 | 8'-0" | 16.40 |