

Specifications

LF 1/2" STRAIGHT WATER HAMMER ARRESTOR




Product Features

- Helps to eliminate shock waves generated in piping systems by sudden on/off changes in flow
- Polypropylene piston
- AA arrestors are suitable for 1-3 fixture units
- May be installed at any angle
- To function more effectively, please install within 6 feet of the fixture the arrestor is servicing.
- Temperature range: 33°F to 180°F
- Max. working pressure: 350psi
- Meets ASSE 1010
- NSF 61 & NSF 372 compliant
- cUPC/IAPMO listed



PFXWHASD

Product Specifications

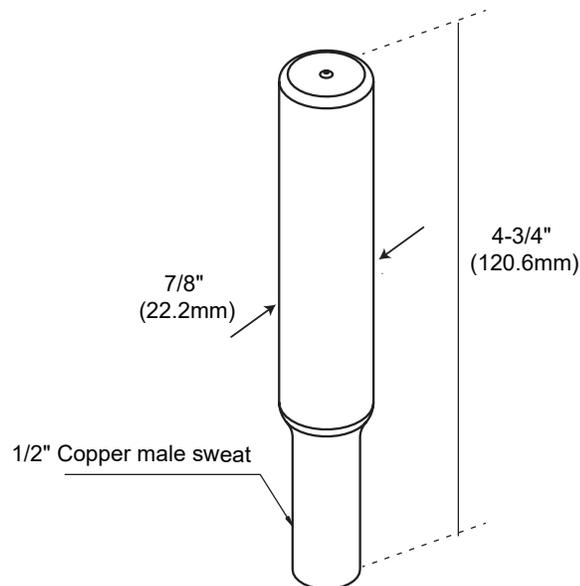

* All measurements are nominal. Please verify before actual installation.

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

©2023 Ferguson Enterprises, LLC. FG 03/2023-B



[FERGUSON.COM/PROFLO](https://www.ferguson.com/proflo)