

# LF 1/2" STRAIGHT WATER HAMMER ARRESTOR



### Product Features


- Helps to eliminate shock waves generated in piping systems by sudden on/off changes in flow
- Polypropylene piston
- AA arrestors are suitable for 1-3 fixture units
- May be installed at any angle
- To function more effectively, please install within 6 feet of the fixture the arrestor is servicing.
- Temperature range: 33°F to 180°F
- Max. working pressure: 350psi
- Meets ASSE 1010
- NSF 61& NSF 372 compliant
- cUPC/IAPMO listed
- Can be installed in systems without need for access panels\*

\*Always check local plumbing codes to determine if access panels are required. Sweat version not to be used in conjunction with copper propress system due to brass connection.



PFXWHASD

### Product Specifications

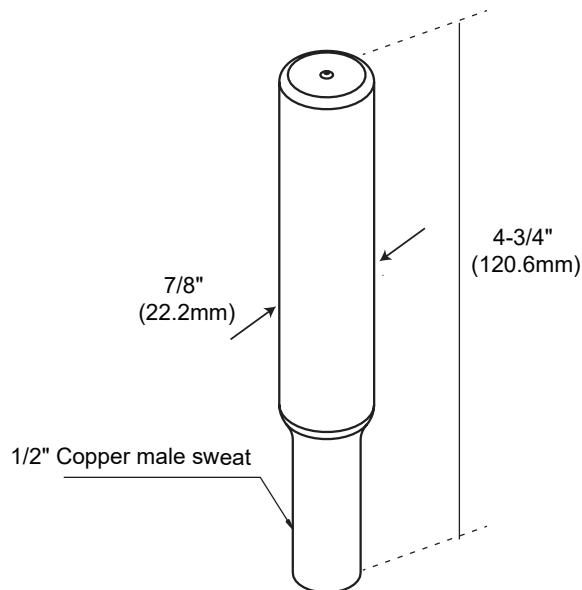

\* All measurements are nominal. Please verify before actual installation.

### Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

