

LF Compression Tee Water Hammer Arrestor



Product Features

- For single fixture use
- Helps to eliminate shock waves generated in piping systems by sudden on/off changes in flow
- In line compression tee connection
- Polypropylene Piston
- AA arrestors are suitable for 1-3 fixture units
- May be installed at any angle.
- To function more effectively, please install within 6 feet of the fixture the arrestor is servicing.
- Approved for installation with no access panels required.



PFXWHAUTB

Product Specifications

Temperature Range: 33°F to 180°F


Max. Working Pressure: 350psi

ASSE 1010-2004

IAMPO Listed (cUPC)

Certified to NSF 372 requirements

Model Numbers	A	B	C
PFXWHAUTB	1/4" OD Compression Tee	3-15/16" (100mm)	2-1/2" (63.5mm)
PFXWHAUTC	3/8" OD Compression Tee	3-15/16" (100mm)	2-1/2" (63.5mm)
PFXWHAUTD	5/8" OD Compression Tee	3-15/16" (100mm)	2-3/4" (69.9mm)

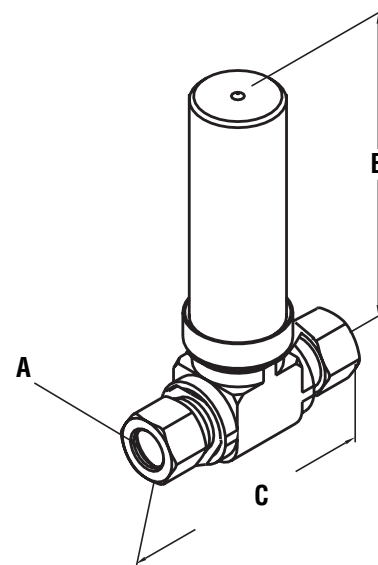

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

