


**RD-300** 

Tag:

## **High Volume Roof Drain**

**SPECIFICATION:** Watts Drainage RD-300 epoxy coated cast iron roof drain with flashing clamp with integral gravel stop, self-locking polyethylene dome, and no hub (standard) outlet.

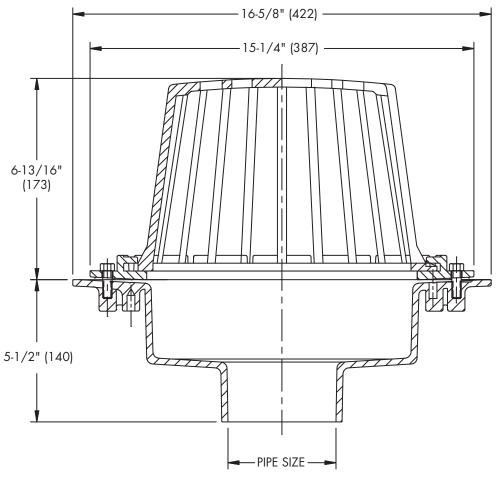

Components		
B15	B15-FLG	
B2-DM	- 0000 - 0000 - 0000 FC-6	

Pipe Sizing (Select One)		
Suffix	Description	
2	2"(51) Pipe Size	
3	3"(76) Pipe Size	
4	4"(102) Pipe Size	
5	5"(127) Pipe Size	
6	6"(152) Pipe Size	
8	8"(203) Pipe Size	
10	10"(254) Pipe Size	

Options (Select One or More)		
Suffix -13 -B -D -F -GSS -K -K13 -K40 -K80 -K81 -K83 -L -R -US -W -85	Description  Galvanized Body and Clamp Sump Receiver Underdeck Clamp Adjustable Extension Flange Stainless Steel Ballast Guard Ductile Iron Dome Galvanized Dome Ductile Iron Low Dome (4" high) Aluminum Dome Rough Bronze Dome SS Mesh Covered Dome Vandal Proof Dome 2" External Water Dam Buy American Compliant Buy American Compliant IRMA Perf. SS Extension	

Job Name	Contractor
Job Location	Contractor's P.O. No
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.

Deck opening 14-1/2" (368) with sump receiver 18" (457)



Free Area Sq. In.

137

Specification Drainage Products

USA: Tel: (828) 288-2179 • TOLL-FREE: 1-800-338-2581 • www.watts.com

ES-WD-RD-300 USA 1304 RD-300