


# HARCO PVC IPS GASKETED FITTINGS

## DESIGN DATA

### Applicable Standards:

Materials:	ASTM D-1784, NSF 61
Joints:	ASTM D-3139
Gaskets:	ASTM F-477
Wall Thickness:	SDR-21
NSF 14 Certification	
Vacuum Qualification:	22"-Hg for 4 hours with no loss per method of ASTM D-3139

### BELL SPECIFICATIONS

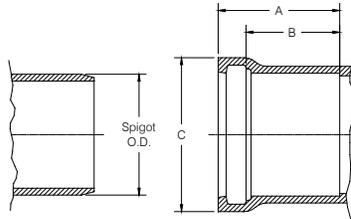

SIZE	STYLE	A	B	C	Spigot O.D.
1½	M	3.17	2.42	2.8	1.90
2	M	3.27	2.52	3.3	2.38
2½	M	3.38	2.63	3.8	2.88
3	M	3.52	2.77	4.5	3.50
4	M	4.10	2.99	5.9	4.50
6	M	4.57	3.46	8.3	6.63
8	M	5.16	3.90	10.4	8.63
10	Fab	5.75	4.70	11.5	10.75
12	Fab	6.15	4.90	12.0	12.75

### Notes:

- All lay lengths & weights are approximate and are subject to change without notice
- Fabricated fitting configurations may vary

### Style Legend:


- M - One piece molded
- A - Assembled using one piece molded fitting with MIPT x Gasketed adapter or Spigot adapter for branch or Bell
- Fab - Fabricated using SCH-40 PVC fittings with HARCO Spigot adapters (or pipe) solvent welded together (See pressure rating warning on this page)

**Fab Style:** These fittings use SCH-40 PVC fittings. SCH-40 PVC fittings do not have a long term pressure rating. See section 6.3.2 of ASTM D2466-97. Use of these fittings in pressure systems is at user's risk.

The use of anything but properly designed and installed thrust blocks will reduce the life of plastic fittings. Thrust blocks must be poured concrete only and sized for the soil conditions. Joint restraint products are available.


**WARNING:** Cyclical pressure surges (WATER HAMMER) can reduce the life of PVC fittings. Where such conditions may exist, HARCO DEEP BELL DUCTILE IRON FITTINGS for IPS size PVC pipe should be considered. HARCO DEEP BELL DUCTILE IRON FITTINGS are available in sizes 1½" through 12".

### TEE (GxGxG)

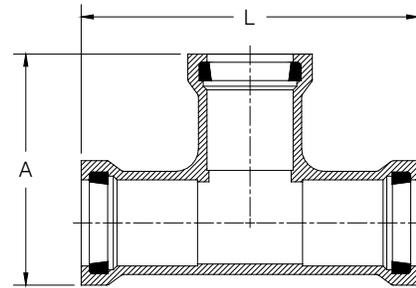

SIZE	PART #	STYLE	A	L	WT
1½ x 1½	112-150	M	6.0	9.1	1.0
2 x 1½	112-215	M	6.1	9.1	1.3
2 x 2	112-220	M	6.1	9.1	1.4
2½ x 1½	112-251	A	8.4	9.9	1.4
2½ x 2	112-252	M	6.8	9.9	2.0
2½ x 2½	112-255	M	6.8	9.9	1.7
3 x 1½	112-315	A	9.4	10.9	2.5
3 x 2	112-320	M	7.7	11.4	2.8
3 x 2½	112-325	M	8.0	11.9	3.1
3 x 3	112-330	M	7.7	10.9	2.8
4 x 2	112-420	M	8.6	13.1	4.3
4 x 2½	112-425	M	8.5	13.1	4.9
4 x 3	112-430	M	8.8	13.1	4.9
4 x 4	112-440	M	9.3	13.1	5.6
5 x 5	112-550	M	11.0	14.8	10.0
6 x 2	112-620	A	12.2	11.6	2.8
6 x 3	112-630	M	11.5	12.5	3.0
6 x 4	112-640	M	11.8	16.3	11.0
6 x 6	112-660	M	11.5	16.4	12.3
8 x 4	112-840	M	13.9	19.5	18.7
8 x 6	112-860	M	14.4	19.5	19.3
8 x 8	112-880	M	14.9	19.5	21.3

### REDUCER S.E.B. (SxG)



SIZE	PART #	STYLE	A	L	WT
2 x 1½	116-215	M	2.8	7.0	0.5
2½ x 2	116-252	M	3.4	7.0	0.8
3 x 2	116-320	M	3.7	7.9	0.9
3 x 2½	116-325	M	4.2	7.4	1.3
4 x 2	116-420	M	4.7	10.0	1.5
4 x 2½	116-425	M	5.0	8.3	1.8
4 x 3	116-430	M	4.7	10.1	1.9
5 x 4	116-540	Fab	5.8	7.8	3.0
6 x 3	116-630	M	7.0	9.0	3.5
6 x 4	116-640	M	6.9	8.0	2.7
6 x 5	116-650	M	7.0	10.0	4.9
8 x 6	116-860	M	9.0	9.3	5.8

Call For Other Sizes, Configurations & Gasket Materials



### THE HARRINGTON CORPORATION

P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506 • 3721 COHEN PLACE • LYNCHBURG, VIRGINIA 24501  
 PHONE: (434) 845-7094 • FAX: (434) 845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com


# HARCO PVC IPS GASKETED FITTINGS

## DESIGN DATA

### Applicable Standards:

Materials:	ASTM D-1784, NSF 14
Joints:	ASTM D-3139
Gaskets:	ASTM F-477
Wall Thickness:	SDR-21
NSF 14 Certification	
Vacuum Qualification:	22"-Hg for 4 hours with no loss per method of ASTM D-3139

### GASKET x FLANGE ADAPTER



SIZE	PART #	STYLE	A	B	L	WT (approx.)
1½	154-015	Fab	5.0	3.9	4.8	0.8
2	154-020	Fab	6.0	4.8	5.1	1.2
2½	154-025	Fab	7.0	5.5	5.8	1.7
3	154-030	Fab	7.5	6.0	6.0	2.4
4	154-040	Fab	9.0	7.5	7.0	6.0
6	154-060	Fab	11.0	9.5	8.3	12.0
8	154-080	Fab	13.5	11.8	17.7	20.0

### NOTES:

- All lay lengths & weights are approximate and are subject to change without notice
- Fabricated fitting configurations may vary

### STYLE LEGEND:


- M - One piece molded
- Fab - Fabricated using SCH-40 PVC fittings with Harco Spigot adapters (or pipe) solvent welded together (See pressure rating warning on this page)

**Fab Style:** These fittings use SCH-40 PVC fittings. SCH-40 PVC fittings do not have a long term pressure rating. See section 6.3.2 of ASTM D2466-97. Use of these fittings in pressure systems is at user's risk.

The use of anything but properly designed and installed thrust blocks will reduce the life of plastic fittings. Thrust blocks must be poured concrete only and sized for the soil conditions. Joint restraint products are available.


**WARNING:** Cyclical pressure surges (WATER HAMMER) can reduce the life of PVC fittings. Where such conditions may exist, HARCO DEEP BELL DUCTILE IRON FITTINGS for IPS size PVC pipe should be considered. HARCO DEEP BELL DUCTILE IRON FITTINGS are available in sizes 1½" through 12".

### GASKET x FEMALE NPT ADAPTER




SIZE	PART #	STYLE	A	L	WT (approx.)
1½	132-015	Fab	2.7	5.7	0.5
2	132-020	Fab	3.3	6.1	0.7
2½	132-025	Fab	3.8	7.3	1.2
3	132-030	Fab	4.5	7.5	1.5
4	132-040	Fab	5.8	9.4	2.6
5	132-050	Fab	7.0	10.5	5.0
6	132-060	Fab	8.1	12.1	6.0

### PE (Plain End) x MALE NPT ADAPTER

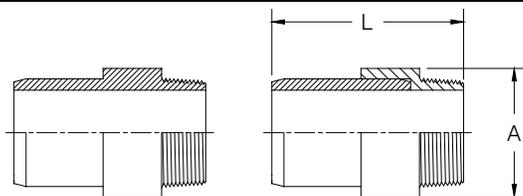

SIZE	PART #	STYLE	A	L	WT (approx.)
1½	133-015	Fab	2.2	5.2	0.3
2	133-020	M	2.6	4.1	0.3
2½	133-025	Fab	3.3	6.3	0.8
3	133-030	Fab	4.0	6.9	1.3
4	133-040	Fab	5.0	7.5	2.0
6	133-060	Fab	7.3	9.8	5.3

### SPIGOT x GASKET ADAPTER



SIZE	PART #	STYLE	A	B	L	WT (approx.)
1½	130-015	M	2.7	1.1	4.5	0.3
2	130-020	M	3.3	1.4	4.9	0.5
2½	130-025	M	3.8	2.0	5.3	0.7
3	130-030	M	4.5	2.0	5.8	0.9
4	130-040	M	5.9	2.3	6.4	1.7
5	130-050	M	7.0	3.0	9.1	3.0
6	130-060	M	8.3	3.0	8.0	3.8



### THE HARRINGTON CORPORATION

P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506 • 3721 COHEN PLACE • LYNCHBURG, VIRGINIA 24501  
 PHONE: (434) 845-7094 • FAX: (434) 845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com

# HARCO PVC IPS GASKETED FITTINGS

## DESIGN DATA

### Applicable Standards:

Materials:	ASTM D-1784, NSF 14
Joints:	ASTM D-3139
Gaskets:	ASTM F-477
Wall Thickness:	SDR-21
NSF 14 Certification	
Vacuum Qualification:	22"-Hg for 4 hours with no loss per method of ASTM D-3139

### NOTES:

- All lay lengths & weights are approximate and are subject to change without notice
- Fabricated fitting configurations may vary

### STYLE LEGEND:

- M - One piece molded  
 HB - Harco style one piece molded, reduced by use of flush style thread x thread bushing  
 FB - Flo style one piece molded, reduced by use of flush style thread x thread bushing  
 Fab - Fabricated using SCH-40 PVC fittings with Harco Spigot adapters (or pipe) solvent welded together (See pressure rating warning on this page)


**Fab Style:** These fittings use SCH-40 PVC fittings. SCH-40 PVC fittings do not have a long term pressure rating. See section 6.3.2 of ASTM D2466-97. Use of these fittings in pressure systems is at user's risk.

The use of anything but properly designed and installed thrust blocks will reduce the life of plastic fittings. Thrust blocks must be poured concrete only and sized for the soil conditions. Joint restraint products are available.

**WARNING:** Cyclical pressure surges (WATER HAMMER) can reduce the life of PVC fittings. Where such conditions may exist, HARCO DEEP BELL DUCTILE IRON FITTINGS for IPS size PVC pipe should be considered. HARCO DEEP BELL DUCTILE IRON FITTINGS are available in sizes 1½" through 12".


Call For Other Sizes, Configurations & Gasket Materials

### SERVICE TEE (GxGxFIPT) (Tapered NPT Thread)



SIZE	PART #	STYLE	L	WT (approx.)
1½ x ¾	151-153	FB	8.5	0.8
1½ x 1	151-154	M	8.5	0.8
1½ x 1¼	151-155	Fab	10.9	0.8
2 x ½	151-202	HB	9.2	1.2
2 x ¾	151-203	M	9.2	1.2
2 x 1	151-204	M	9.2	1.2
2 x 1¼	151-205	M	9.2	1.2
2 x 1½	151-206	M	9.2	1.2
2½ x ½	151-252	HB	9.9	1.5
2½ x ¾	151-253	HB	9.9	1.5
2½ x 1	151-254	M	9.9	1.5
2½ x 1¼	151-255	M	9.9	1.5
2½ x 1½	151-256	M	9.9	1.5
2½ x 2	151-258	M	9.9	1.5
3 x ½	151-302	HB	11.0	2.5
3 x ¾	151-303	HB	11.0	2.5
3 x 1	151-304	M	11.0	2.5
3 x 1¼	151-305	M	11.0	2.5
3 x 1½	151-306	M	11.0	2.5
3 x 2	151-308	M	11.0	2.5
4 x ½	151-402	HB	10.7	3.1
4 x ¾	151-403	HB	10.7	3.1
4 x 1	151-404	M	10.7	3.1
4 x 1¼	151-405	M	10.7	3.1
4 x 1½	151-406	M	10.7	3.1
4 x 2	151-408	M	10.7	3.1
6 x ½	151-602	HB	9.3	5.8
6 x ¾	151-603	HB	9.3	5.8
6 x 1	151-604	HB	9.3	5.8
6 x 1¼	151-605	HB	9.3	5.8
6 x 1½	151-606	M	9.3	5.8
6 x 2	151-608	M	11.5	5.8

### ACME SERVICE TEE (GxGxACME) (315psi rated)

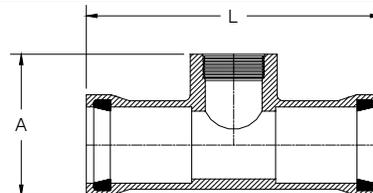

SIZE	PART #	STYLE	A	L	WT (approx.)
2 x 1	153-204	M	4.5	9.2	1.4
2 x 1¼	153-205	M	4.5	9.2	1.4
2 x 1½	153-206	M	4.5	9.2	1.5
2½ x 1	153-254	M	4.4	9.6	1.9
2½ x 1¼	153-255	M	4.4	9.6	1.9
2½ x 1½	153-256	M	4.4	9.6	1.9
3 x 1	153-304	M	3.9	10.2	2.8
3 x 1¼	153-305	M	3.9	10.2	2.7
3 x 1½	153-306	M	3.8	10.2	2.6



### THE HARRINGTON CORPORATION

P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506 • 3721 COHEN PLACE • LYNCHBURG, VIRGINIA 24501  
 PHONE: (434) 845-7094 • FAX: (434) 845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com


# HARCO PVC IPS GASKETED FITTINGS

## DESIGN DATA

### Applicable Standards:

Materials:	ASTM D-1784, NSF 14
Joints:	ASTM D-3139
Gaskets:	ASTM F-477
Wall Thickness:	SDR-21
NSF 14 Certification	
Vacuum Qualification:	22"-Hg for 4 hours with no loss per method of ASTM D-3139

### CROSS (GxGxGxG)

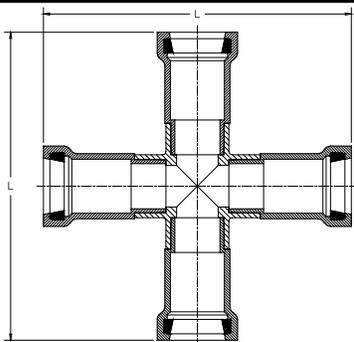

SIZE	PART #	STYLE	L	WT (approx.)
1½	172-015	Fab	11.6	1.7
2	172-020	Fab	12.1	3.4
2½	172-025	Fab	14.3	4.4
3	172-030	Fab	15.1	5.3
4	172-040	Fab	17.9	9.0

### NOTES:

- All lay lengths & weights are approximate and are subject to change without notice
- Fabricated fitting configurations may vary

### STYLE LEGEND:


M - One piece molded  
 Fab - Fabricated using SCH-40 PVC fittings with Harco Spigot adapters (or pipe) solvent welded together (See pressure rating warning on this page)

**Fab Style:** These fittings use SCH-40 PVC fittings. SCH-40 PVC fittings do not have a long term pressure rating. See section 6.3.2 of ASTM D2466-97. Use of these fittings in pressure systems is at user's risk.

The use of anything but properly designed and installed thrust blocks will reduce the life of plastic fittings. Thrust blocks must be poured concrete only and sized for the soil conditions. Joint restraint products are available.

**WARNING:** Cyclical pressure surges (WATER HAMMER) can reduce the life of PVC fittings. Where such conditions may exist, HARCO DEEP BELL DUCTILE IRON FITTINGS for IPS size PVC pipe should be considered. HARCO DEEP BELL DUCTILE IRON FITTINGS are available in sizes 1½" through 12".


### CAP (Gasket)

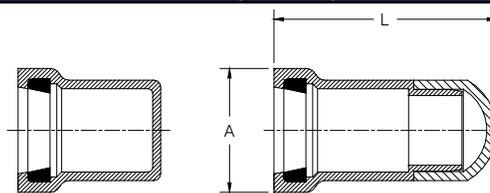

Poured concrete thrust blocks only.

SIZE	PART #	STYLE	A	L	WT (approx.)
1½	149-015	Fab	2.8	5.3	0.5
2	149-020	M	3.3	3.7	0.5
2½	149-025	Fab	3.8	6.4	1.0
3	149-030	Fab	4.5	6.7	1.4
4	149-040	Fab	5.9	7.6	2.7
5	149-050	Fab	7.0	10.0	4.4
6	149-060	Fab	8.5	9.8	6.9


### NON-PRESSURE WYE (GxGxG)

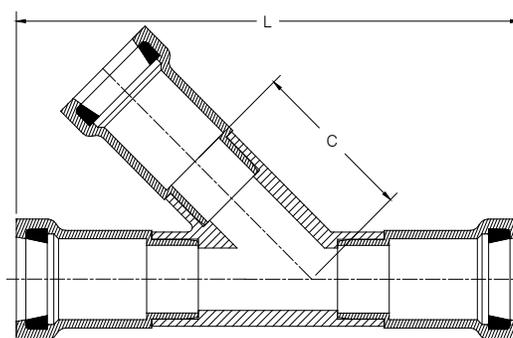

SIZE	PART #	STYLE	C	L	WT (approx.)
3 x 3	101-0303	Fab	6.8	10.1	5.0
4 x 4	101-0404	Fab	8.4	12.3	10.0

### GASKET x MALE NPT ADAPTER

Do not use joint restraint.

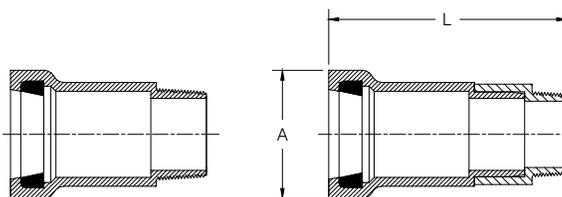

Size on size and reducing sizes of these adapters also available in HARCO Ductile Iron.

SIZE	PART #	STYLE	A	L	WT (approx.)
1½	131-015	M	2.8	4.3	0.5
2	131-020	M	3.3	4.6	0.5
2½	131-025	M	3.8	4.8	1.2
3	131-030	M	4.5	5.0	1.5
4	131-040	Fab	5.9	8.5	2.8
5	131-050	M			3.0
6	131-060	Fab	8.3	10.9	10.3

Call For Other Sizes, Configurations & Gasket Materials



### THE HARRINGTON CORPORATION

P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506 • 3721 COHEN PLACE • LYNCHBURG, VIRGINIA 24501  
 PHONE: (434) 845-7094 • FAX: (434) 845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com


# HARCO PVC IPS GASKETED FITTINGS

## DESIGN DATA

### Applicable Standards:

Materials:	ASTM D-1784, NSF 14
Joints:	ASTM D-3139
Gaskets:	ASTM F-477
Wall Thickness:	SDR-21
NSF 14 Certification	
Vacuum Qualification:	22"-Hg for 4 hours with no loss per method of ASTM D-3139

### 11¼° BEND (GxG)



SIZE	PART #	STYLE	B	WT (approx.)
2	126-020	Fab		2.0
3	126-030	Fab		3.0
4	126-040	Fab		5.0
6	126-060	Fab		11.0

### NOTES:

- All lay lengths & weights are approximate and are subject to change without notice
- Fabricated fitting configurations may vary

### STYLE LEGEND:


M - One piece molded  
 Fab - Fabricated using SCH-40 PVC fittings with Harco Spigot adapters (or pipe) solvent welded together (See pressure rating warning on this page)

**Fab Style:** These fittings use SCH-40 PVC fittings. SCH-40 PVC fittings do not have a long term pressure rating. See section 6.3.2 of ASTM D2466-97. Use of these fittings in pressure systems is at user's risk.

The use of anything but properly designed and installed thrust blocks will reduce the life of plastic fittings. Thrust blocks must be poured concrete only and sized for the soil conditions. Joint restraint products are available.


**WARNING:** Cyclical pressure surges (WATER HAMMER) can reduce the life of PVC fittings. Where such conditions may exist, HARCO DEEP BELL DUCTILE IRON FITTINGS for IPS size PVC pipe should be considered. HARCO DEEP BELL DUCTILE IRON FITTINGS are available in sizes 1½" through 12".

### 90° BEND (GxG)




SIZE	PART #	STYLE	B	L	WT (approx.)
1½	118-015	M	1.0	4.8	0.6
2	118-020	M	1.3	6.2	0.8
2½	118-025	M	1.6	6.8	1.3
3	118-030	M	2.0	7.7	1.8
4	118-040	M	2.5	9.5	3.8
5	118-050	Fab			3.8
6	118-060	M	3.6	12.3	9.0
8	118-080	M	4.5	14.9	16.3

### 45° BEND (GxG)



SIZE	PART #	STYLE	A	B	L	WT (approx.)
1½	122-015	Fab	5.8	0.9	9.1	0.9
2	122-020	M	5.3	0.6	7.8	0.8
2½	122-025	M	6.1	0.7	8.3	1.1
3	122-030	M	6.6	0.9	9.1	1.6
4	122-040	M	8.4	1.1	11.0	3.4
6	122-060	M	11.3	1.6	13.6	7.8
8	122-080	M	13.8	2.0	15.8	13.3

### 22½° BEND



SIZE	PART #	STYLE	B	WT (approx.)
2	124-020	Fab	2.0	2.0
2½	124-025	Fab	2.0	3.0
3	124-030	Fab	2.3	3.0
4	124-040	Fab	2.6	5.0
6	124-060	Fab	4.3	11.0

Call For Other Sizes, Configurations & Gasket Materials



### THE HARRINGTON CORPORATION

P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506 • 3721 COHEN PLACE • LYNCHBURG, VIRGINIA 24501  
 PHONE: (434) 845-7094 • FAX: (434) 845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com

20180618


# HARCO PVC IPS GASKETED FITTINGS

## DESIGN DATA

### Applicable Standards:

Materials:	ASTM D-1784, NSF 14
Joints:	ASTM D-3139
Gaskets:	ASTM F-477
Wall Thickness:	SDR-21
NSF 14 Certification	
Vacuum Qualification:	22"-Hg for 4 hours with no loss per method of ASTM D-3139

### PLUG (Spigot)



Poured concrete thrust blocks only.

SIZE	PART #	STYLE	A	L	WT (approx.)
1½	144-015	Fab	2.7	5.2	0.2
2	144-020	M	3.0	2.7	0.2
2½	144-025	Fab	3.4	5.3	0.8
3	144-030	M	3.8	3.5	0.4
4	144-040	M	5.0	3.5	0.4
6	144-060	M	6.8	5.4	2.3
8	144-080	M	8.9	6.4	3.8

### NOTES:

- All lay lengths & weights are approximate and are subject to change without notice
- Fabricated fitting configurations may vary

### STYLE LEGEND:


- M - One piece molded
- C - Manufactured by Certain-Teed Corporation
- Fab - Fabricated using SCH-40 PVC fittings with Harco Spigot adapters (or pipe) solvent welded together (See pressure rating warning on this page)

**Fab Style:** These fittings use SCH-40 PVC fittings. SCH-40 PVC fittings do not have a long term pressure rating. See section 6.3.2 of ASTM D2466-97. Use of these fittings in pressure systems is at user's risk.

The use of anything but properly designed and installed thrust blocks will reduce the life of plastic fittings. Thrust blocks must be poured concrete only and sized for the soil conditions. Joint restraint products are available.


**WARNING:** Cyclical pressure surges (WATER HAMMER) can reduce the life of PVC fittings. Where such conditions may exist, HARCO DEEP BELL DUCTILE IRON FITTINGS for IPS size PVC pipe should be considered. HARCO DEEP BELL DUCTILE IRON FITTINGS are available in sizes 1½" through 12".

### LINE COUPLING (GxG) (w/ Stop)




SIZE	PART #	STYLE	A	L	WT (approx.)
1½	108-015	M	2.8	6.5	0.5
2	108-020	M	3.3	6.7	0.7
2½	108-025	M	3.8	7.0	0.9
3	108-030	M	4.5	7.2	1.3
4	108-040	M	5.9	10.6	2.7
6	108-060	M	8.3	9.3	5.6
8	108-080	M	10.4	11.1	10.3
10	108-100	C	11.5	11.5	14.0
12	108-120	C	12.0	12.0	22.0

### REPAIR COUPLING (GxG) KNOCK-ON STYLE (No Stop)



SIZE	PART #	STYLE	A	L	WT (approx.)
1½	109-015	M	2.8	6.5	0.5
2	109-020	M	3.3	7.8	0.7
2½	109-025	M	3.8	8.4	0.9
3	109-030	M	4.5	9.0	1.3
4	109-040	M	5.9	10.6	2.7
5	109-050	M	7.0	11.2	4.1
6	109-060	M	8.3	11.6	5.6
8	109-080	M	10.4	11.1	10.3
10	109-100	C	11.5	11.5	14.0
12	109-120	C	12.0	12.0	22.0

### REPLACEMENT HARCO PRESSURE GASKET



SIZE	PART #	STYLE	WT (approx.)
1½	195-015	M	0.1
2	195-020	M	0.1
2½	195-025	M	0.1
3	195-030	M	0.1
4	195-040	M	0.2
6	195-060	M	0.3
8	195-080	M	0.3

Call For Other Sizes, Configurations & Gasket Materials



## THE HARRINGTON CORPORATION

P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506 • 3721 COHEN PLACE • LYNCHBURG, VIRGINIA 24501  
 PHONE: (434) 845-7094 • FAX: (434) 845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com