

# **GENERAL**

Sink is formed of #20 gauge, 300 series, nickel-bearing stainless steel. Top mount.

## **DESIGN FEATURES**

Bowl Depth: 8" (203mm)

Coved Corners: 2-1/2" (64mm) vertical radius and 2-3/4" (70 mm) horizontal radius.

Finish: Exposed surfaces are polished to an Elite Satin finish. Underside: Fully undercoated on bottom of bowl.

### **OTHER**

Drain Opening: 3-1/2" (89mm) Installation Hardware: Included for 3/4" (19mm) countertop.

#### **OPTIONAL ACCESSORIES**

Bottom Grid: GBG1414SS Drain: LK35, D1125


Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO<sup>®</sup> as meeting the applicable requirements of the Uniform Plumbing Code<sup>®</sup>, International

Plumbing Code<sup>®</sup>, and National Plumbing Code of Canada.

**Hole Drilling Configurations** 

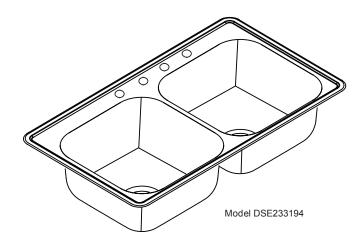



# **SINK DIMENSIONS (INCHES)\***


	Overall		Inside Each Bowl			Cutout in Countertop (1-1/2"(38mm)		No. of 1-1/2"(38mm)	Mi
Model Number	L	W	L	W	D	Radius	Corners) W	Dia. Faucet Holes 4"(102mm) Center	Minimum Cabinet Size
DSE23319	33 (838mm)	19 (483mm)	14 (356mm)	14 (356mm)	8 (203mm)	32-3/8 (822mm)	18-3/8 (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)

Ð ⊕


€ € Œ


Ð

\*Length is left to right. Width is front to back.



**U-Channel Type Mounting System** 





Model DSE233194 Illustrated

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked

2222 Camden Court Oak Brook, IL 60523