

COMFORT HEIGHT® TOILET K-3827

Features

- Vitreous china
- Elongated bowl
- Comfort Height®
- AquaPiston® flushing system
- Less seat and supply
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- Includes left-hand polished chrome trip lever
- 11-1/4" (286 mm) x 9" (229 mm) water area
- 29-1/2" (749 mm) x 18-1/4" (464 mm) x 31-1/2" (800 mm)



Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-3827	Comfort Height toilet	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Recommended Accessories				
K-7637	Angle supply with stop – 3/8" NPT	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The elongated bowl toilet shall be made of vitreous china. Toilet shall be 29-1/2" (749 mm) in length, 18-1/4" (464 mm) in width, and 31-1/2" (800 mm) in height with an 11-1/4" (286 mm) by 9" (229 mm) water area. Toilet shall be Comfort Height. Toilet shall have a 12" (305 mm) rough-in. Toilet shall feature 2-1/8" (54 mm) glazed trapway. Toilet shall be 1.28 gpf (4.8 lpf) with AquaPiston flushing system. Toilet shall include left-hand polished chrome trip lever. Toilet shall be less seat and supply. Elongated bowl toilet shall be Kohler Model K-3827-_____.

BANCROFT®

Optional Accessories

K-4650	Lustra™ elongated open-front toilet seat – for Accessibility compliance	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-9475	Bancroft® left-hand trip lever (non-CP finish)	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Technical Information

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (54 mm)
Water area	11-1/4" (286 mm) x 9" (229 mm)
Water depth from rim	5-3/8" (137 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:	
Bowl	K-4067
Tank	K-4383
Tank cover	1033723
Trip lever	1160365
Bolt cap accessory pack	1013092


Installation Notes

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Will comply with the Americans with Disabilities Act (ADA) when installed per the requirements of the 2010 ADA Standards of Accessible Design, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

The model is acceptable for left-hand Accessible compartment installations only.

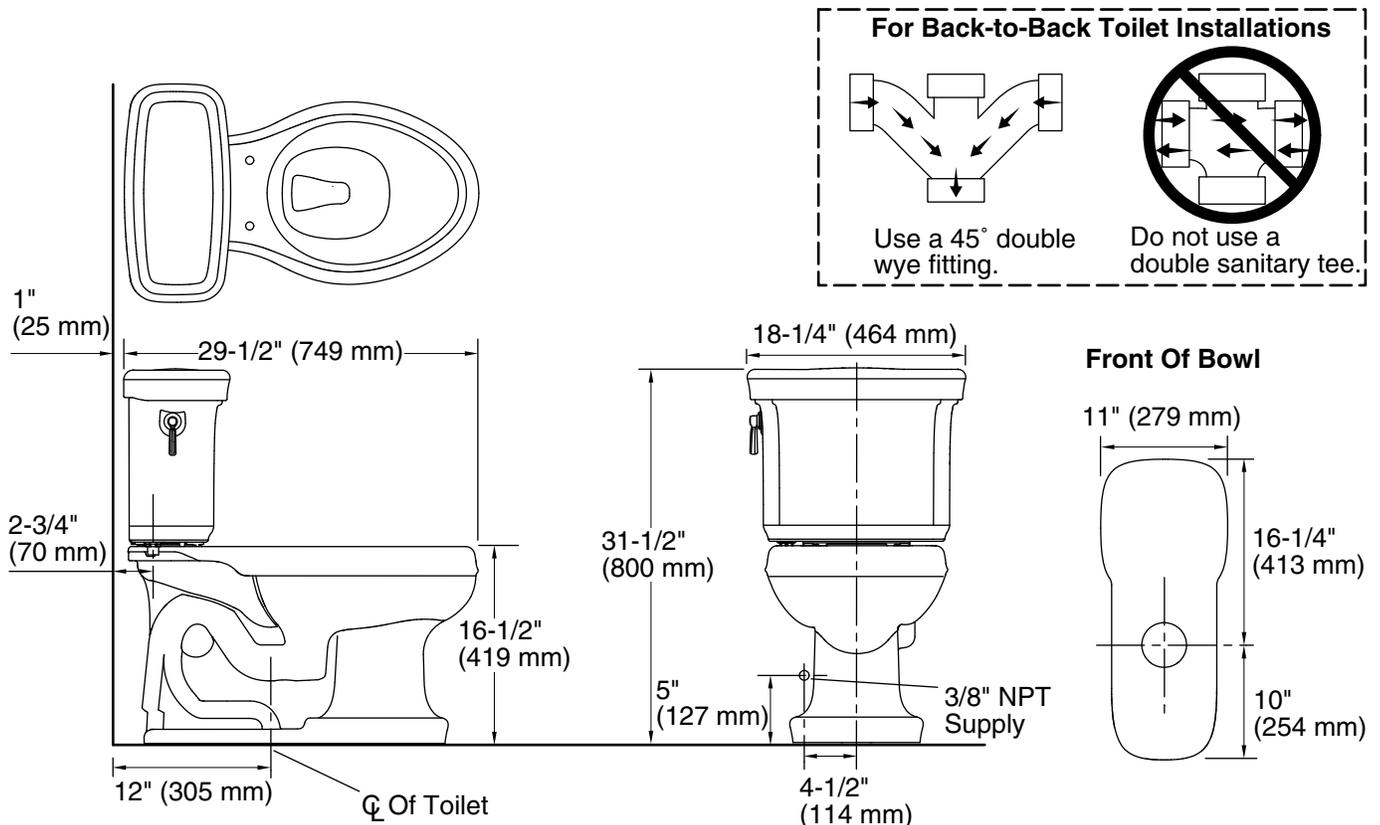

Product Diagram