



RETENTION TANKS

ERTG Series



Features

- Long-lasting alternative to galvanized and glass-lined tanks.
- For use in water treatment and pump tank applications.
- Thick internal epoxy coating for potable water.
- Standardized fitting locations for easy replacement.
- Individual cartons for easier handling and storage.
- 2" top port with plug packaged separately.
- Rugged, Tan exterior finish.
- 3-Year Limited Warranty.




RETENTION TANKS


Specifications

Model Number	Tank Volume (Gallons)	Tank Dimensions (inches)								Connection (NPTF)		System Drawdown Volume (Gallons)		
		A	B	C	D	E	F	G	H	J		20/40	30/50	40/60
ERTG12-A	12	12	24	27	5	13	-	-	1¼	1¼		1.9	1.2	0.9
ERTG21-A	21	16	24	27	5	13	-	-	1¼	1¼		3.3	2.1	1.5
ERTG30-A	30	16	36	39	8	17	-	-	1¼	1¼		4.7	3.0	2.2
ERTG42T-A	42	16	48	51	12	26	-	-	1¼	1¼		6.5	4.2	3.0
ERTG42S-A	42	20	30	34	8	17	-	-	1¼	1¼		6.5	4.2	3.0
ERTG82-A	82	20	60	63	12	33	-	-	1¼	1¼		12.7	8.2	5.9
ERTG120-A	120	24	60	65	12	33	-	-	1½	1½		18.6	12.1	8.6
ERTG220-A	230	30	66	78	6	32	6	24	2	2		34.1	22.2	15.8
ERTG315-A	315	36	66	80	6	32	7	31	2	2		48.8	32.0	22.7

Maximum Working Pressure: 75 PSI

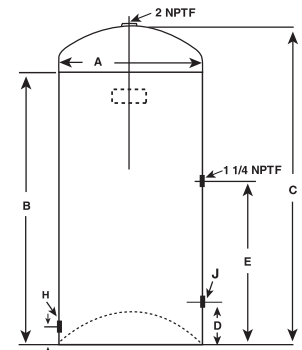


ERTG12-A through ERTG120-A

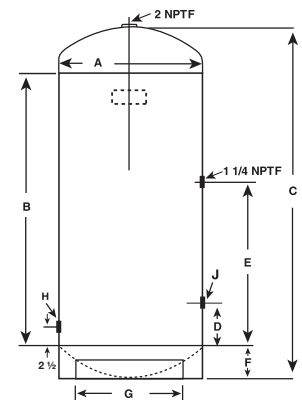


ERTG220-A and ERTG315-A

Application Examples

Water Treatment (Retention)

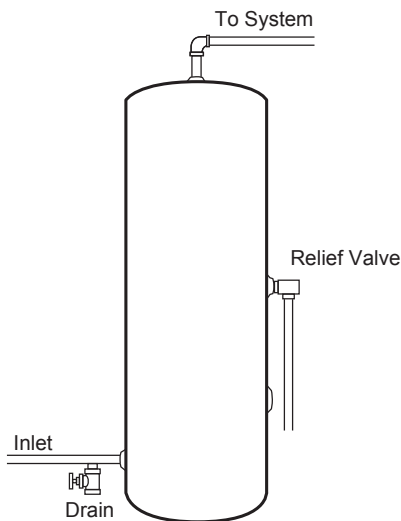

Well Pump Pressure Tank

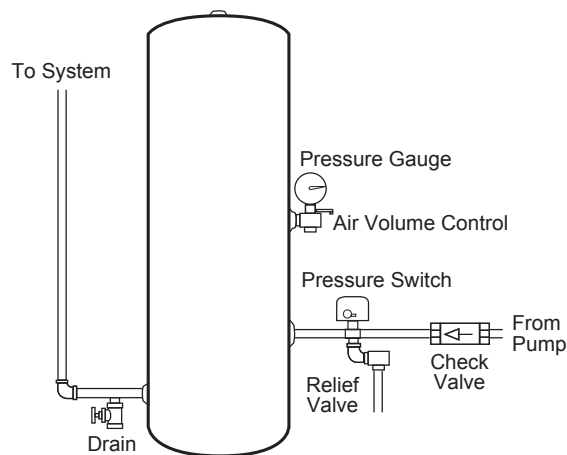

1400 Division Road, West Warwick, RI USA 02893
T: 800.426.8765 F: 800.293.1519

www.amtrol.com

