
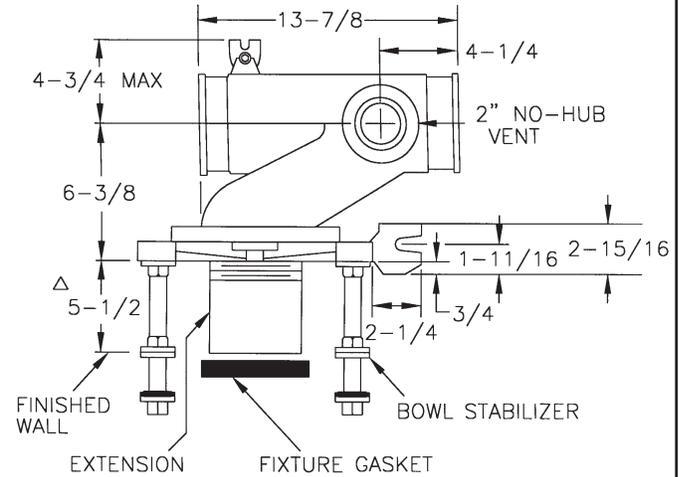


## HORIZONTAL 4" NO-HUB, ADJUSTABLE, SINGLE

**12674 & 12684**

**APPLICATION:** For use with Siphon Jet or Blowout Closets in No-Hub piping systems where single adjustable fitting with horizontal flow is desired.

**12674 Left-Hand (Shown)**  
**12684 Right-Hand (Opposite)**

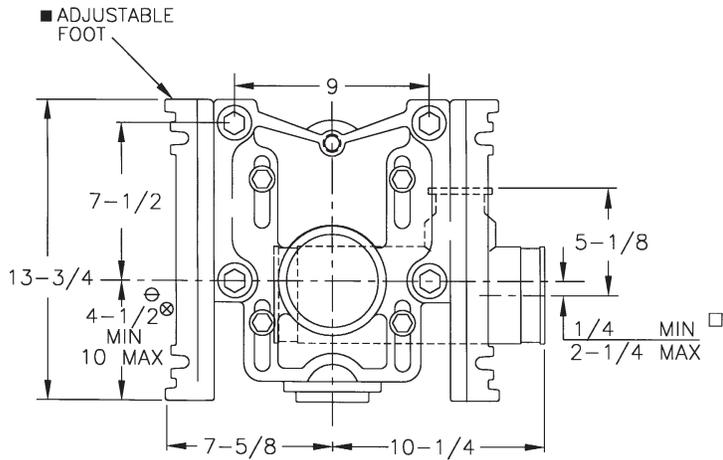



**60 LBS.**

## HORIZONTAL 4" NO-HUB, ADJUSTABLE, BACK-TO-BACK

**12694**

**APPLICATION:** For use with Siphon Jet or Blowout Closets in No-Hub piping systems where back-to-back adjustable fitting with horizontal flow is desired.

**Back-to-Back**

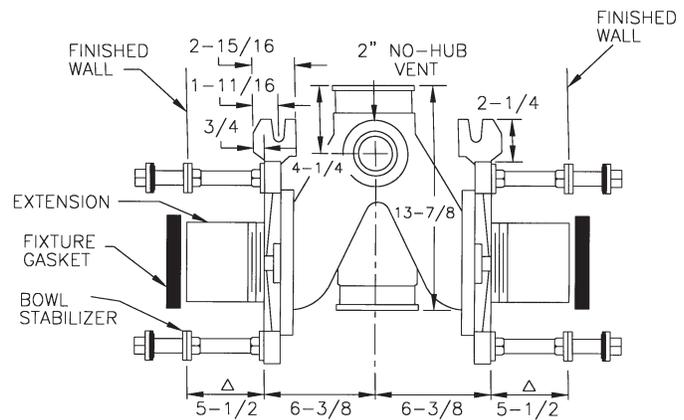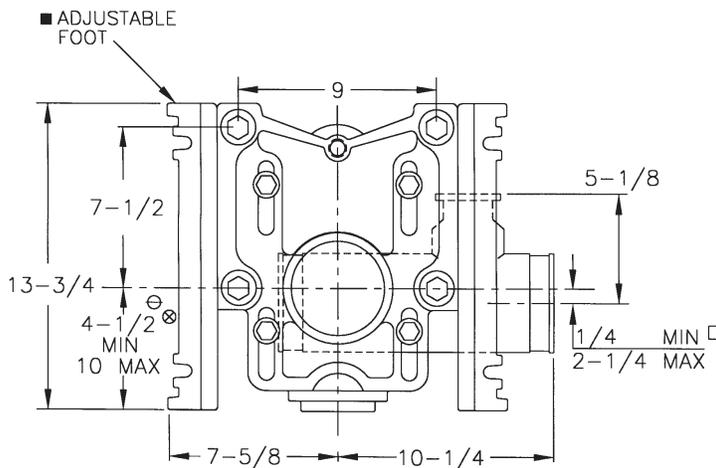

**100 LBS.**

## OPTIONS & NOTES

- |       |  |       |  |
|-------|--|-------|--|
| -PF   | Pylon Foot, Std.                           | -10   | ABS Extension, through 10-1/2" Wall                        |
| -OR   | O-Ring Carrier                             | -24   | Carrier for Floor-Mounted, Back-Outlet China Bowls         |
| -SD   | Special-Duty 500 lb. Carrier               | -30   | Cast Iron Adjustable Extension with Connector              |
| ▼ -HS | Hub & Spigot                               | -30-2 | Cast Iron Adjustable Extension with Connector and Test Cap |
| -AUX  | Auxiliary Inlet, 2"                        | -32   | Carrier for Wide Chase Installations                       |
| -VP   | Vandal-Proof Trim                          | -35   | Closet Carrier for Wheelchair High Rough                   |
| -1    | Positioning Frame                          | ▼ -58 | Horizontal No-Hub Cast Long Barrel                         |
| -6    | Supply Pipe Support (Specify Type of Pipe) |       |  |

RECOMMENDED ALL FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS BY OTHERS.


DIM. SHOWN IS FOR SIPHON JET. BLOWOUT IS:  $\ominus$  11" MIN. & 16-1/2" MAX.  $\square$  2" MIN. & 4" MAX.

$\otimes$  FOR ROUGHING OVER 6" FOR SIPHON JET OR 12-1/2" FOR BLOWOUT, SPECIFY ON ORDER.

$\triangle$  FOR DIM. SHORTER THAN 5-1/2" (1" MIN.) CUT EXT. SPECIFY -10 FOR LONGER EXT. (10-1/2" MAX.)

**12674-HS SERIES**


Single, Left-Hand, Hub & Spigot

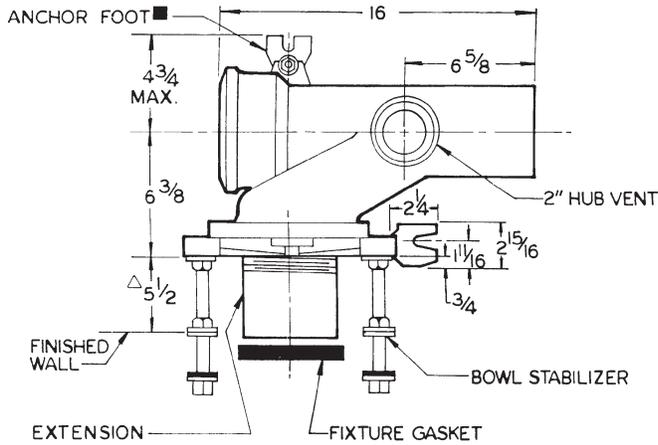

**65 LBS.**

**12684-HS SERIES**


Single, Right-Hand, Hub & Spigot

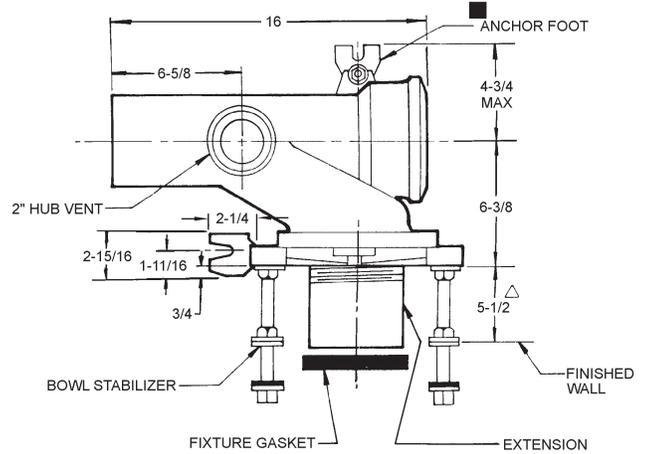

**65 LBS.**

**12694-HS SERIES**

Back-to-Back, Hub & Spigot

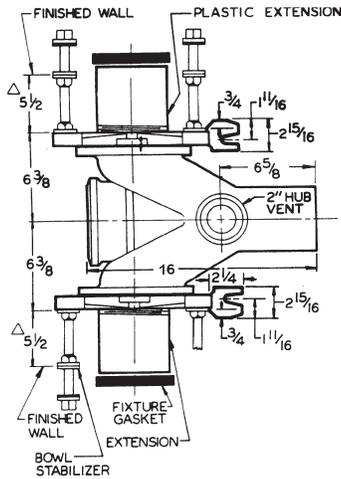


**112 LBS.**

**12674-58 SERIES**

**Long Barrel**

Single, Left-Hand, No-Hub

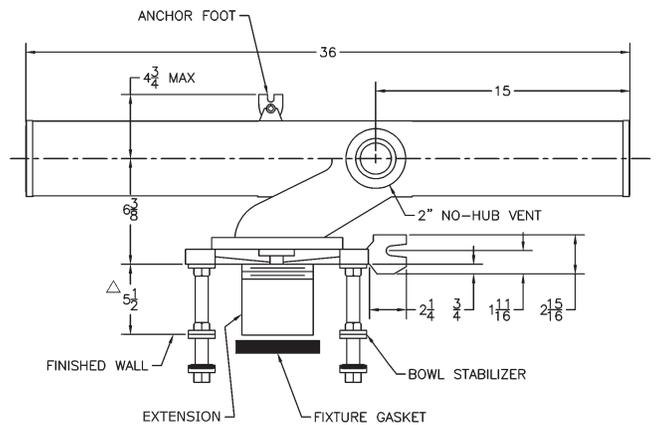


**82 LBS.**

**12684-58 SERIES**

**Long Barrel**

Single, Right-Hand, No-Hub

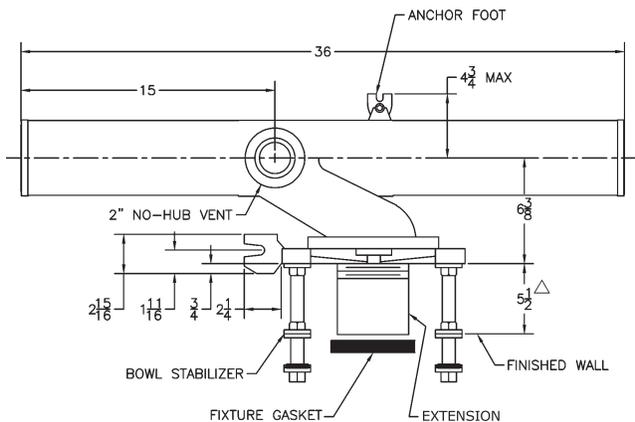


**82 LBS.**

**12694-58 SERIES**

**Long Barrel**

Back-to-Back, No-Hub

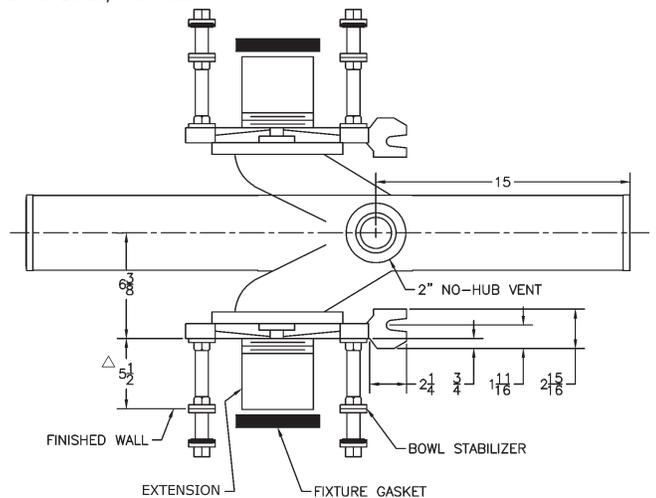

**125 LBS.**

RECOMMENDED ALL FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS BY OTHERS.

FOR DIM. SHORTER THAN 5-1/2" (1" MIN.) CUT EXT. SPECIFY -10 FOR LONGER EXT. (10-1/2" MAX.)