




Montara™ Collection | Outdoor Sconce 49076 01 | Page s341



OUTDOOR / INDOOR

Extend a warm welcome with
the Outdoor Collection by Kichler®.
Our durable exterior lanterns deliver
an attractive finishing touch that


emphasizes the beauty of your
home and adds security for you
and your guests.

Montara™

Olde Iron Finish and
Umber Etched Linen Glass

The relaxed Montara™ Collection blends Olde World styling with a hint of modernism. Featuring a textured Olde Iron finish, its unadorned linear composition is carefully balanced by stunning curved sheets of Umber Etched Linen glass. Each glass sheet gingerly surrounds Satin-Etched Cased Opal Cylinders to create a demure layered effect.

49078 OI

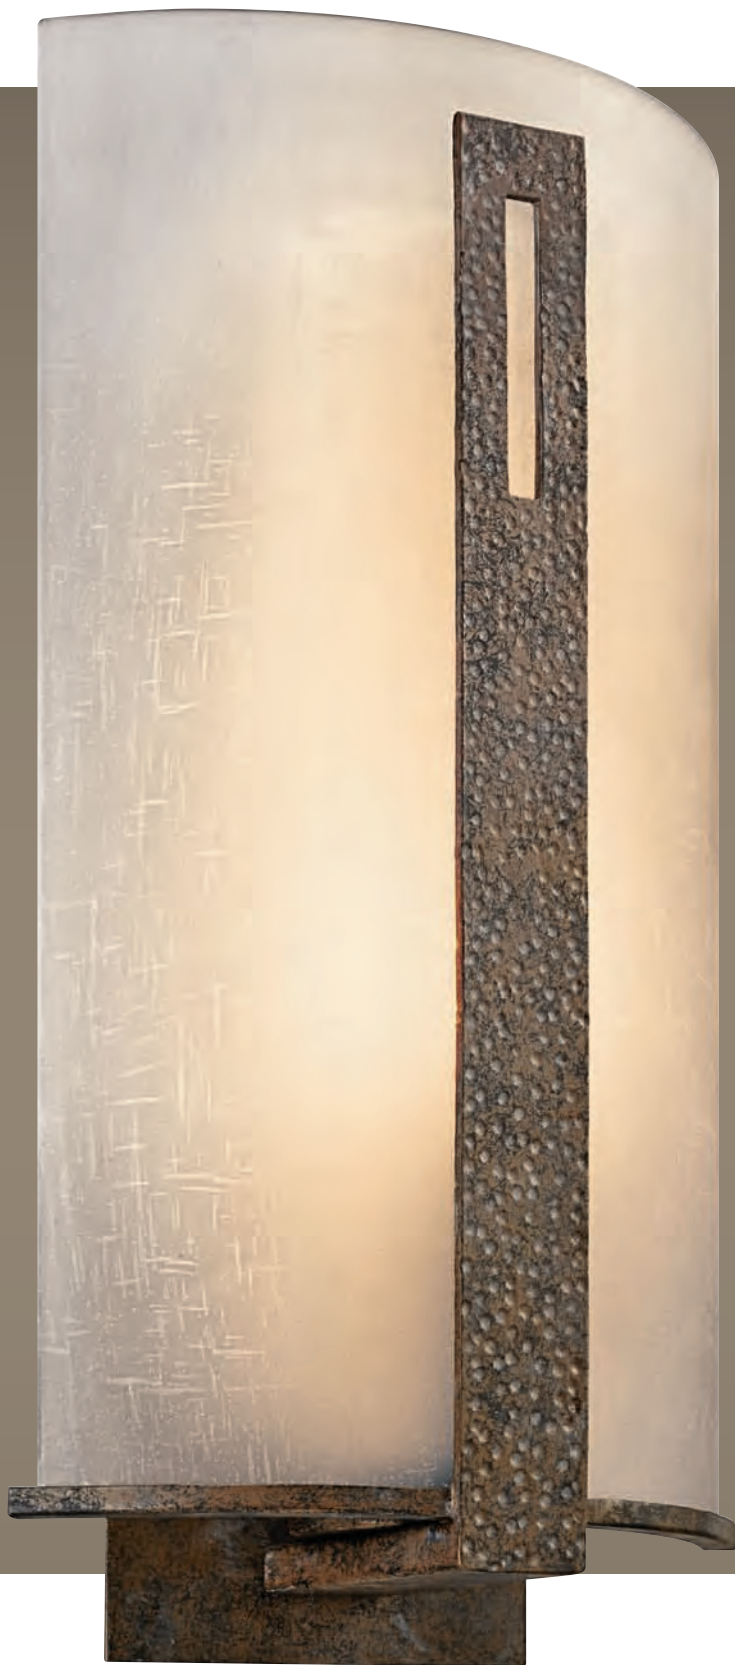



Ⓐ 49078 OI
A.D.A. Compliant



Ⓑ 49076 OI
A.D.A. Compliant



Ⓓ 49049 OI



Ⓒ 49077 OI
A.D.A. Compliant



Ⓔ 49080 OI

Ⓐ 49078 OI | OUTDOOR SCNCE
1-Lt., 60-W. Max. (M) T10. Wd. 9",
Hgt. 16-1/2", Ext. 4", Hgt. from cntr. of
wall opening 10-1/4". UL listed-wet.
Meets A.D.A. standards. U.S. Patent Pending.

Ⓑ 49076 OI | OUTDOOR SCNCE
1-Lt., 60-W. Max. (M) T10. Wd. 6", Hgt. 8",
Ext. 4", Hgt. from cntr. of wall opening 4-1/4".
UL listed-wet. Meets A.D.A. standards.
U.S. Patent Pending.

Ⓒ 49077 OI | OUTDOOR SCNCE
1-Lt., 60-W. Max. (M) T10. Wd. 7-1/2", Hgt. 10",
Ext. 4", Hgt. from cntr. of wall opening 6". UL listed-
wet. Meets A.D.A. standards. U.S. Patent Pending.

Ⓓ 49049 OI | OUTDOOR PENDANT
1-Lt., 100-W. Max. (M) Length 9-1/2",
Wd. 6-1/2", B. Hgt. 13-1/2", Ovrll. 87-1/2",
Extra lead wire 62". 6' of chain. Add. chain
order 4927 OI. UL listed-damp.
U.S. Patent Pending.

Ⓔ 49080 OI | POST LIGHT
1-Lt., 150-W. Max. (M) Length 9-1/2",
Wd. 6-1/2", Hgt. 14". *Post not incl.
UL listed-wet. U.S. Patent Pending.

Ripley™

Olde Bronze® Finish



Ⓐ 49059 OZ



Ⓑ 49060 OZ



Ⓒ 49061 OZ

Ⓐ 49059 OZ | OUTDOOR SCONCE
1-Lt., 40-W. Max. (Type R) or 60-W. Max.
(G-type lamp). Wd. 8", Hgt. 7-1/2", Ext. 9-1/2",
Hgt. from cntr of wall opening 2-3/4".
UL listed-wet. Dark Sky compliant with use of
R14 40-W bulb.

Ⓑ 49060 OZ | OUTDOOR SCONCE
1-Lt., 40-W. Max. (Type R) or 60-W. Max.
(G-type lamp). Wd. 10", Hgt. 9-1/2",
Ext. 11-1/2", Hgt. from cntr of wall opening 3".
UL listed-wet. Dark Sky compliant with use of
R14 40-W bulb.

Ⓒ 49061 OZ | OUTDOOR SCONCE
1-Lt., 40-W. Max. (Type R) or 60-W. Max.
(G-type lamp). Wd. 12", Hgt. 10", Ext. 13",
Hgt. from cntr of wall opening 3-1/4".
UL listed-wet. Dark Sky compliant with use
of R14 40-W bulb.



Ⓓ 49063 OZ



Ⓔ 49062 OZ

- Ⓓ 49063 OZ | OUTDOOR POST LIGHT
1-Lt., 40-W. Max. (Type R) or 60-W. Max.
(G-type lamp). D. 12", Hgt. 16". UL listed-wet.
Dark Sky compliant with use of R14 40-W bulb.
*Post not incl. U.S. Patent Pending.

- Ⓔ 49062 OZ | OUTDOOR PENDANT
1-Lt., 40-W. Max. (Type-R) or 60-W. Max.
(G-type lamp). Dia. 10", B. Hgt. 8", Ovrll. 46",
Extra lead wire 101". Add. chain order 4927 OZ.
Add. stems order 2999 (12") OZ. UL listed-damp.
Dark sky with use of R14 40-W bulb.
U.S. Patent Pending.

See page 667, in catalog K108, for our complete
selection of posts and pedestal mount adaptors.

Energy Efficient Outdoor/Indoor

Brushed Aluminum and Architectural Bronze Finishes



(A) 11097 AZ



(C) 11095 AZ
A.D.A. Compliant



(E) 11096 AZ
A.D.A. Compliant



(B) 11097 BA



(D) 11095 BA
A.D.A. Compliant



(F) 11096 BA
A.D.A. Compliant

- (A) 11097 AZ | OUTDOOR FLUSH MOUNT
(B) 11097 BA | OUTDOOR FLUSH MOUNT
Opal Polycarbonite Diffuser. 2-Lt., 2700K, PBCFS1850 18-W. (GU24) Lamps incl. (67Lm/W Effic.). 10" Sq., Hgt. 5". Listed-damp. Lamps incl. U.S. Patent Pending.

- (C) 11095 AZ | OUTDOOR SCNCE
(D) 11095 BA | OUTDOOR SCNCE
Opal Polycarbonite Diffuser. 1-Lt., 2700K, MLS13GUSWW 13-W. (GU24) Lamp incl. (70Lm/W Effic.). Wd. 7", Hgt. 16", Ext. 4", Hgt. from cntr. of wall opening 6". Photocell incl. Listed-wet. Meets A.D.A. standards. Lamp incl. U.S. Patent Pending.

- (E) 11096 AZ | OUTDOOR SCNCE
(F) 11096 BA | OUTDOOR SCNCE
Opal Polycarbonite Diffuser. 1-Lt., 2700K, MLS13GUSWW 13-W. (GU24) Lamp incl. (70Lm/W Effic.). Wd. 6", Hgt. 9", Ext. 4", Hgt. from cntr. of wall opening 4-1/4". Photocell incl. Listed-wet. Meets A.D.A. standards. Lamp incl. U.S. Patent Pending.



Ⓒ 11098 NI



Ⓗ 11099 NI



Ⓙ 11107 AGZ

- Ⓒ **11098 NI | OUTDOOR SCONCE**
1-Lt., 3000K, PBCFA14 14-W. (GU24)
(58.2Lm/W Effic.). Wd. 8", Hgt. 12", Ext.
9-1/2". Hgt. from cntr. of wall opening 6".
Photocell incl. Listed-wet. Lamp incl. Dark Skies
compliant. U.S. Patent No. Design 383,239.
Canada Patent No. Design 78917. Taiwan
Patent No. Design ND-053495.




- Ⓗ **11099 NI | OUTDOOR SCONCE**
1-Lt., 3000K, PBCFA14 14-W. (GU24)
(58.2Lm/W Effic.). Wd. 10-1/2", Hgt. 14-1/2",
Ext. 12". Hgt. from cntr. of wall opening 9".
Photocell incl. Listed-wet. Lamp incl. Dark Skies
compliant. U.S. Patent No. Design 383,239.
Canada Patent No. Design 78917. Taiwan
Patent No. Design ND-053495.




- Ⓙ **11107 AGZ | OUTDOOR SCONCE**
Light Umber Glass. 1-Lt., 2700K, MLS18GUWW
18-W. (GU24) (67Lm/W Effic.). Wd. 9-1/2",
Hgt. 9-1/2", Ext. 10-1/2". Hgt. from cntr. of
wall opening 2-1/2". Photocell incl. Listed-wet.
Lamp incl.




Post Accessories

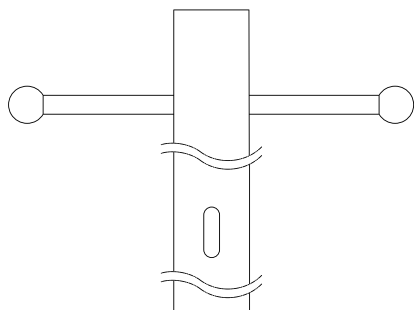


(A) 9501

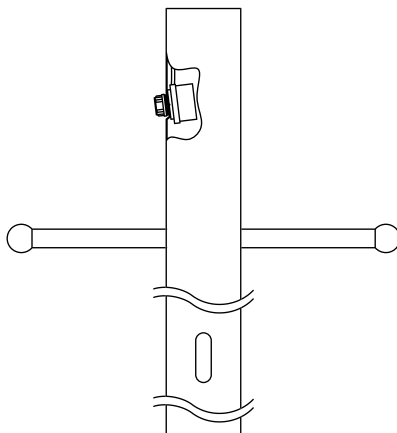


(B) 9502




(C) 9506




(D) 9595

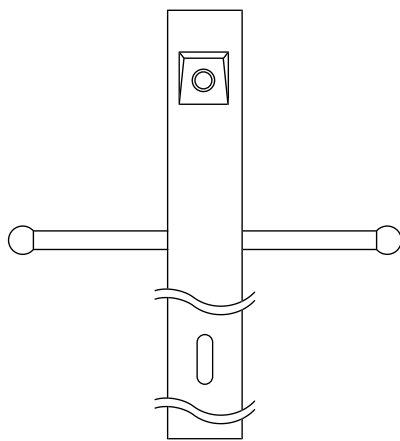

(E) 49904

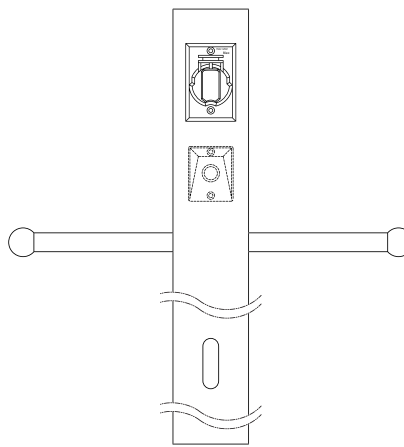

(F) 49907



(G) 9510

Posts

- (A) 9501 BK | BLACK
9501 WH | WHITE
Aluminum Post with Ladder Rest. Dia. 3", Hgt. 84".

9505 AZ | ARCHITECTURAL BRONZE
Architectural Bronze Aluminum Post with Ladder Rest. Dia. 3", Hgt. 84".

- (B) 9502 AZ | ARCHITECTURAL BRONZE | **NEW**
9502 BK | BLACK
Aluminum Post with Internal Photocell and Ladder Rest. Dia. 3", Hgt. 84".

- (C) 9506 AZ | ARCHITECTURAL BRONZE
9506 BK | BLACK
9506 OB | OLDE BRICK®
Aluminum Post. Dia. 3", Hgt. 84".

- (D) 9595 AZ | ARCHITECTURAL BRONZE | **NEW**
9595 BK | BLACK
9595 LZ | LEGACY BRONZE™
9595 OB | OLDE BRICK®
Fluted Aluminum Post. Dia. 3", Hgt. 84".

- (E) 49904 AZ | ARCHITECTURAL BRONZE | **NEW**
49904 BK | BLACK | **NEW**
49904 WH | WHITE | **NEW**
Aluminum Post with External Photocell and Ladder Rest. Dia. 3", Hgt. 84".

- (F) 49907 AZ | ARCHITECTURAL BRONZE | **NEW**
49907 BK | BLACK | **NEW**
49907 WH | WHITE | **NEW**
Aluminum Post with External Photocell, Ladder Rest and GCO (Grounded Convenience Outlet). Dia. 3", Hgt. 84".

49914 AZ | ARCHITECTURAL BRONZE | **NEW**
49914 BK | BLACK | **NEW**
Aluminum Post. Dia. 3", Hgt. 144".

Cast Decorative Posts

- (G) 9510 BK | BLACK
9510 OB | OLDE BRICK®
9510 OZ | OLDE BRONZE®
Decorative Cast Aluminum Post. Dia. 13", Hgt. 72". Hardware included (J-bolts) for use at time of concrete base pour.

49950 BK | BLACK | **NEW**
Replacement Internal Photocell (Black only)

49951 BK | BLACK | **NEW**
Replacement External Photocell (Black only)

49952 BK | BLACK | **NEW**
Replacement GCO (Grounded Convenience Outlet)

49953 AZ | ARCHITECTURAL BRONZE | **NEW**
49953 BK | BLACK | **NEW**
49953 WH | WHITE | **NEW**
Replacement Ladder Rest

Standard Gauge Chain

Chain may be ordered in 3' lengths to supplement existing chain supplied with Kichler® fixtures. To order additional chain, look for the chain recommendations listed for fixtures requiring chain.

2996 APC
2996 AVI
2996 BST
2996 CH
2996 HB
2996 MBZ
2996 PN
2996 TRZ

Heavy Gauge Chain

4901 AVI
4901 CH
4901 HB
4901 MBZ
4901 TRZ
4902 PN

Extra Heavy Gauge Chain

4903 PN
4908 CTZ
4909 APC
4909 LBZ

Outdoor Solid Brass Chain

4927 OI

Stem Segments


To increase the fixture overall length to a maximum of five stem segments you may order:

12" Length

2995 AP (for use with 1960)
2995 BK (for use with 1960)
2995 OZ (for use with 1960)
2999 APC
2999 AVI
2999 MBZ
2999 PN
4938 AGZ

incl. - included
Lt. - light
W. - watt
Max. - maximum
Adj. - adjustable
Wd. - width
D. - diameter
Hgt. - height

B. Hgt. - body height
Ovrl. - overall
Add. - additional
cntr. - center
illum. - illuminated
Effic. - efficacy
Replcmt. - replacement
Ext. - extension

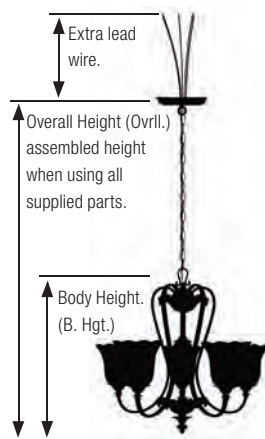

Legend

- Hybrid** = This symbol indicates the product is best suited for Indoor use with self ballasted, compact fluorescent lamps sold through electrical distributors and lighting showrooms across the U.S.
- Hybrid OD** = This symbol indicates the product is best suited for Outdoor use with self ballasted, compact fluorescent lamps sold through electrical distributors and lighting showrooms across the U.S.
- (C) = Candelabra based lamp (E-12).
- (C/K) = Candelabra based lamp (E-12) or Krypton candelabra based lamps.
- (M) = Medium based lamp (E-26).
- ✓ = Fixture requires supply wire rated for at least 75° C.
- ❖ = Fixture requires supply wire rated for at least 90° C.
- ☆ = When electrical connection is made inside the fixture, supply wire must be rated at least 75° C. When electrical connection is made in an outlet box, supply wire must be rated at least 60° C.
- ① = Installation Instructions: Fixture must be supported independently of the outlet box unless the outlet box is UL listed for the weight to be supported. Consult a qualified electrician / installer. Required installation parts included.
- = Many of the products in this catalog have the Energy Star logo. This identifies lighting that uses 2/3 less energy than conventional lighting and lasts six to ten times longer. For more information, visit www.energystar.gov.
- = Title 24 refers to the California Building Standards Code. All lighting fixtures in this catalog that comply with the October 1, 2005 revision of the California Title 24 standards are marked with the T24 logo. For more information, visit www.energy.ca.gov/title24.

- Bulbs not included unless otherwise noted.
- Wattages stated are the maximum recommended; however, you may use lower wattage bulbs to suit your lighting needs. Some recommended bulbs are not available in the maximum allowable wattage.
- All electrical products are rated as 120-volt, AC unless otherwise noted.
- All electrical products are certified and listed to UL/CSA Standards for use in U.S.A. and Canada except where noted.
- All products featured in outdoor section are certified and listed to UL/CSA standards for wet location except where noted.
- All chain drop products equipped with at least 72" of chain.
- On some products, in order to accommodate higher than normal ceiling heights, extra lead wire is supplied and specified. With additional sections of chain (not included), this allows an added measure of design flexibility.
- Many long life tungsten halogen capsule lamps are now available as alternates to conventional incandescent light bulbs. The halogen capsule lamps may be used to replace any lamp of a HIGHER wattage, but not to exceed the existing specified maximum wattage, i.e., 72-W. may replace a 75-W.
- Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants and other forms of weathering.
- To serve you better, Kichler® Lighting reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed.

9501 BK.....s346	42251 AP.....s291	49904 AZ.....s346
9501 WH.....s346	42252 AP.....s291	49904 BK.....s346
9502 AZ.....s346	42253 AP.....s290	49904 WH.....s346
9502 BK.....s346	42254 AP.....s290	49907 AZ.....s346
9505 AZ.....s346	42255 AP.....s291	49907 BK.....s346
9506 AZ.....s346	42259 AVI.....s304	49907 WH.....s346
9506 BK.....s346	42260 AVI.....s305	49914 AZ.....s346
9506 OB.....s346	42261 AVI.....s302	49914 BK.....s346
9510 BK.....s346	42262 AVI.....s305	49950 BK.....s346
9510 OB.....s346	42264 AVI.....s304,325	49951 BK.....s346
9510 OZ.....s346	42265 AVI.....s305,325	49952 BK.....s346
9595 AZ.....s346	42267 AVI.....s304	49953 AZ.....s346
9595 BK.....s346	42292 AVI.....s304	49953 BK.....s346
9595 LZ.....s346	42301 CH.....s286	49953 WH.....s346
9595 OB.....s346	42302 CH.....s287	
	42303 CH.....s284,286	61008.....s309
10325 NI.....s317	42304 CH.....s287	65201.....s312
10325 OZ.....s317	42306 CH.....s287	65308.....s308
10326 NI.....s316	42307 CH.....s286	65309.....s308
10669 NI.....s319	42325 NI.....s313	65314.....s312
10669 OZ.....s319	42326 NI.....s313	65315.....s312
10670 NI.....s319	42327 NI.....s313	65316.....s311
10670 OZ.....s319	42330 OZ.....s297	65317.....s311
11095 AZ.....s344	42333 OZ.....s297	65318.....s311
11095 BA.....s344	42337 OZ.....s297	65319.....s309
11096 AZ.....s344	42342 PN.....s283	65350.....s309
11096 BA.....s344	42343 PN.....s280	69014.....s312
11097 AZ.....s344	42344 PN.....s282	69116.....s311
11097 BA.....s344	42347 PN.....s283	69087.....s308
11098 NI.....s345	42348 PN.....s283	
11099 NI.....s345	42349 PN.....s282	70655.....s335
11101 NI.....s318	45057 OZ.....s300	70725.....s336
11102 NI.....s318	45073 NI.....s322	70733.....s332
11104 NI.....s318	45074 NI.....s322	70735.....s332
11105 NI.....s318	45075 NI.....s322	70736.....s333
11107 AGZ.....s345	45091 PN.....s324	70737.....s330
	45092 PN.....s324	70739.....s330
42008 PN.....s324	45093 PN.....s324	70740.....s328
42009 PN.....s324	45131 TRZ.....s295	70741.....s329
42056 OZ.....s301	45202 AP.....s323	70742.....s329
42057 OZ.....s301	45203 AP.....s323	70743.....s329
42058 OZ.....s300	45204 AP.....s323	70744.....s328
42059 OZ.....s301	45212 CH.....s278	70745.....s331
42212 CH.....s279	45262 AVI.....s325	74132.....s332
42213 CH.....s276	45263 AVI.....s325	74234.....s336
42214 CH.....s278	45264 AVI.....s325	74238.....s330
42215 CH.....s279	49049 OI.....s341	74239.....s333
42216 CH.....s278	49059 OZ.....s342	74240.....s337
42227 TRZ.....s295	49060 OZ.....s342	74242.....s334
42228 TRZ.....s292	49061 OZ.....s342	74245.....s331
42229 TRZ.....s294	49062 OZ.....s343	74255.....s335
42230 TRZ.....s294	49063 OZ.....s343	76103.....s337
42231 TRZ.....s295	49076 OI.....s341	76139.....s333
42247 AP.....s291	49077 OI.....s341	76155.....s335
42248 AP.....s288	49078 OI.....s341	
42249 AP.....s290	49080 OI.....s341	