# **KOHLER**<sub>®</sub>

#### Features

- Vitreous china.
- Elongated bowl.
- AquaPiston<sup>®</sup> flushing system.
- One-piece.
- Includes seat and cover.
- Includes trip lever.
- Less supply.
- 1.28 gpf (4.8 lpf).
- 12" (305 mm) rough-in.
- 2-1/8" (54 mm) glazed trapway.
- 11" (279 mm) x 8-3/4" (222 mm) water area.
- 28-1/8" (714 mm) x 17-3/4" (451 mm) x 28-5/8" (727 mm).

#### **Recommended Accessories**

K- 7637 Angle Supply with Stop (single)

#### **Optional Accessories**

K- 4650 Toilet Seat K- 9167-L Trip Lever

#### Components

Product includes:

K- 4733 Toilet Seat

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.





#### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

#### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### Available Color/Finishes

Color tiles intended for reference only.

#### Color Code Description


- 0 White
- 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar
- 33 Mexican Sand™
- K4 Cashmere
- 58 Thunder™ Grey
- 7 Black Black™



## Memoirs® Comfort Height® Toilet K-3812



Memoirs® Comfort Height® Toilet K-3812

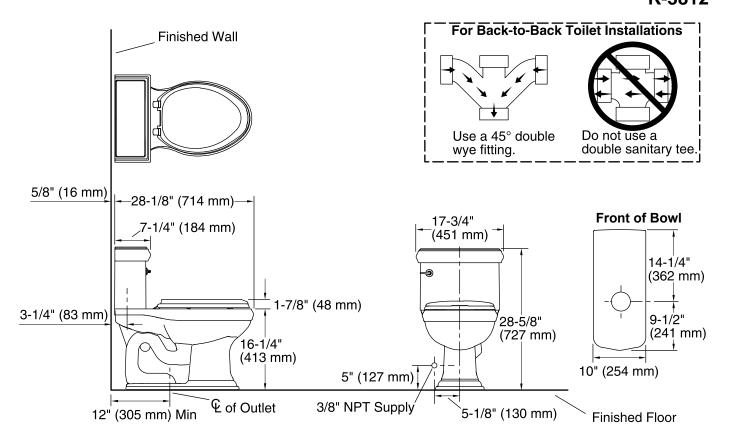

#### **Technical Information**

| All product dimensions are nominal. |                                |
|-------------------------------------|--------------------------------|
| Toilet type:                        | One-piece                      |
| Bowl shape:                         | Elongated front                |
| Flush type:                         | AquaPiston                     |
| Seat hinge type:                    | Quiet-Close™, Quick-Release™   |
| Trap passageway:                    | 2-1/8" (54 mm)                 |
| Water Consumption                   |                                |
| Full:                               | 1.28 gpf (4.8 lpf)             |
| Water surface size:                 | 11" x 8-3/4" (279 mm x 222 mm) |
| Rim to water surface:               | 6" (152 mm)                    |
| Rough-in:                           | 12" (305 mm)                   |
| Seat-mounting holes:                | 5-1/2" (140 mm)                |
|                                     |                                |

#### Notes

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

