

Location:



SYMMONS® Lucetta®

Widespread Lavatory Faucet SLW-4612

Specification Submittal



Model Numbers

- ☐ SLW-4612 Widespread Lavatory Faucet with pop-up drain assembly

Alternate Finish Options

Append appropriate -suffix to model number.

- ☐ -STN Satin Nickel Finish
- Polished Chrome (standard finish)

Options / Modifications

Append appropriate -suffix to model number.

- ☐ -1.5 1.5 gpm (5.7 L/min) flow restrictor
- ☐ -1.0 1.0 gpm (3.8 L/Min) flow restrictor
- ☐ -G Grid strainer drain assembly
- ☐ -NA Non-aerated laminarflow outlet spray

Feature Highlights

- Two handle widespread lavatory faucet with quarter turn ceramic components.
- 8 - 16 inch centers for mounting
- Braided supply hoses
- Pop-up drain and lift rod assembly
- Aerator with 2.2 gpm flow rate (8.3 L/min)
- Metal construction, polished chrome finish

Standards / Certifications



- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61.9, NSF/ANSI 372
- WaterSense 1.0 gpm & 1.5 gpm



Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions Lucetta Widespread Lavatory Faucet, SLW-4612

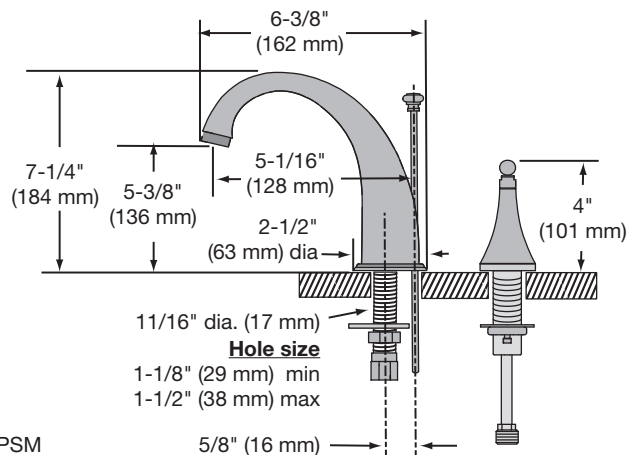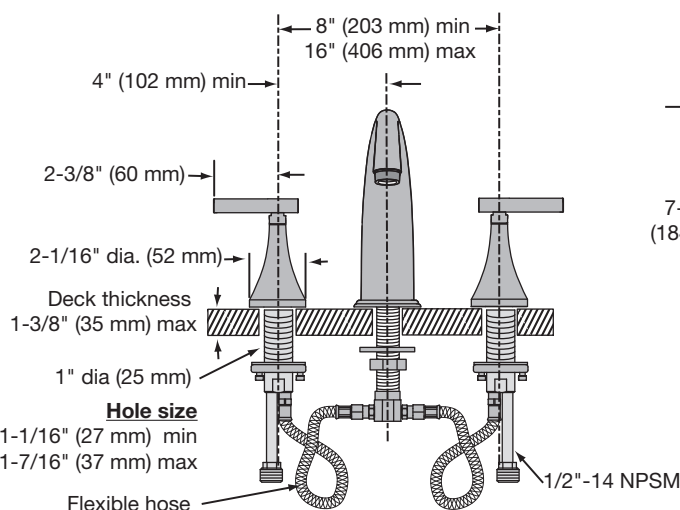

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
Phone: (800) 796-6667 ■ Fax: (800) 961-9621
Website: symmons.com ■ Email: gethelp@symmons.com
Copyright © 2017 Symmons Industries, Inc. ■ ZV-1713 REV B ■ 082817



SYMMONS®
the smart choice™