

AGAVE WIRE, LTD

Toll-Free (800) 690-3408

ISO 9001:2000 Certified

Fax: (469) 547-4242

PRODUCT DATA SHEET

PRODUCT OVERVIEW:

APCS/APSS-1201 (Flexible CCS Tracer Wire)


CONSTRUCTION: One 12 AWG Copper Clad Steel PE Insulated Conductor

APPROVALS: UL - Tracer Wire

APPLICATION: Tracer Wire Suitable For Detecting Buried Facilities

CONSTRUCTION PARAMETERS:

CONDUCTOR: 12 AWG Copper Clad Steel
STRANDING: Solid
NUMBER OF CONDUCTORS: 1
INSULATION MATERIAL: PE
INSULATION THICKNESS: 0.030" Nominal
COPPER O.D.: 0.081" Nominal
FINISHED O.D.: 0.142" Nominal
WEIGHT PER 1000ft: 22.03 lbs/1000'

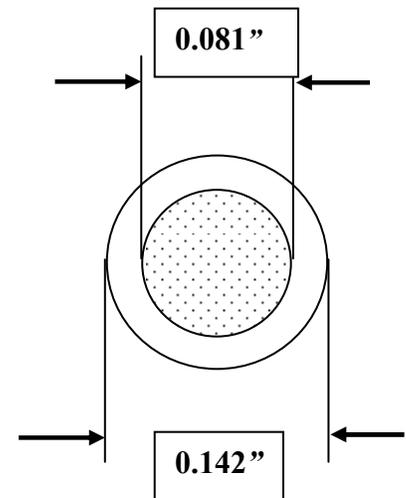

ELECTRICAL & ENVIRONMENTAL PROPERTIES:

TEMPERATURE RATING: -20° c to 80° c

OPERATING VOLTAGE: 30v

INSULATION COLOR: Various Colors Available

BREAK LOAD: 282-299 LBS TENSILE STRENGTH: 55,000-58,111 PSI

PRINT LEGEND:

“AGAVE WIRE - 12AWG PE (30) COPPER CLAD STEEL TRACER WIRE (UL) 30v E246360”

On special orders, the customer will accept all mil lengths and +/- 10% of total order requested. The information presented here is, to the best of our knowledge, is true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise

This specification is proprietary intellectual property of Agave Wire. Any information contained herein shall not be disclosed to any party without written consent of Agave Wire.

Manufactured in the U.S.A.