

## Chelsea™ Shower Head

### MODELS:

- S-3011: 2.5 GPM (9.5 L/min) flow rate
- S-3011-E2: 2.0 GPM (7.6 L/min) flow rate
- S-3011-E175: 1.75 GPM (6.6 L/min) flow rate

### FEATURES:

- 5 plungers with 45 sprays, 12 massage jets, 3 spray patterns
- Patented Anystream® plungers resist scale build-up
- Spray adjusting faceplate
- Plastic body construction, with brass ball nut
- 1/2" -14 NPTF female inlet
- Corrosion resistant finishes
- Coordinates with Chelsea Collection

### STOCK FINISHES:



PC BN

### SPECIALTY FINISHES:



BBZ MB ORB PB PN



### STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- CEC (CA Energy Commission) certified, 1.75 GPM only
- WaterSense certified, 2.0 & 1.75 GPM only

### WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- Limited Lifetime Warranty (consumer)
- 1 Year Limited Warranty (commercial)

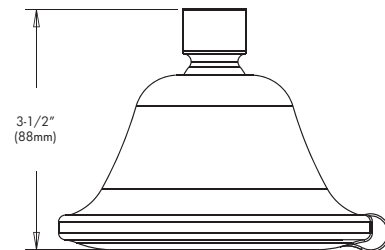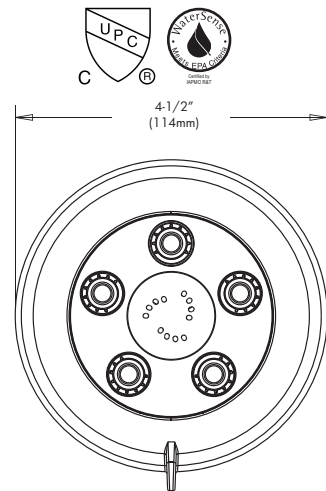

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107  
F: 800-977-2747  
W: [WWW.SPEAKMAN.COM](http://WWW.SPEAKMAN.COM)  
R: 02-OCTOBER 2018