

BA260 Series

1000 WOG


1/4" - 3"

Specifications: MSS SP110



- ASTM Grade Materials Used Throughout
- Full Port Design
- Low Operating Torque
- 2 piece Stem Packing
- Locking Lever Handle
- Full Depth N.P.T. Threads
- Blow Out Proof Stem
- Designed per MSS SP 110.

Materials

ITEM	QUANTITY	DESCRIPTION	MATERIAL
1	1	BODY	ASTM A351, GRADE CF8M
2	1	TAILPIECE	ASTM A351, GRADE CF8M
3	1	BALL	ASTM A351, GRADE CF8M
4	1	STEM	ASTM A276, TYPE 316
5	2	SEAT	RPTFE
6	1	BODY SEAL	PTFE
7	1	THRUST WASHER	PTFE
8	1	PACKING, MALE	PTFE
9	1	PACKING, FEMALE	PTFE
10	1	GLAND NUT	304 STAINLESS STEEL
11	1	HANDLE	304 STAINLESS STEEL
12	1	LOCKING DEVICE	304 STAINLESS STEEL
13	1	LOCKWASHER	304 STAINLESS STEEL
14	1	HANDLE NUT	ASTM A194, GRADE 8
15	1	HANDLE GRIP	VINYL

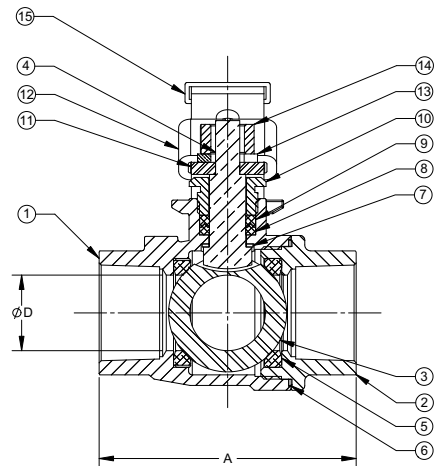

Pressure Temperature Chart

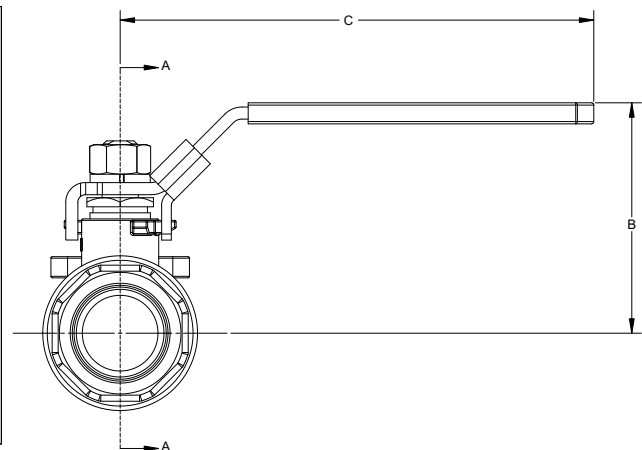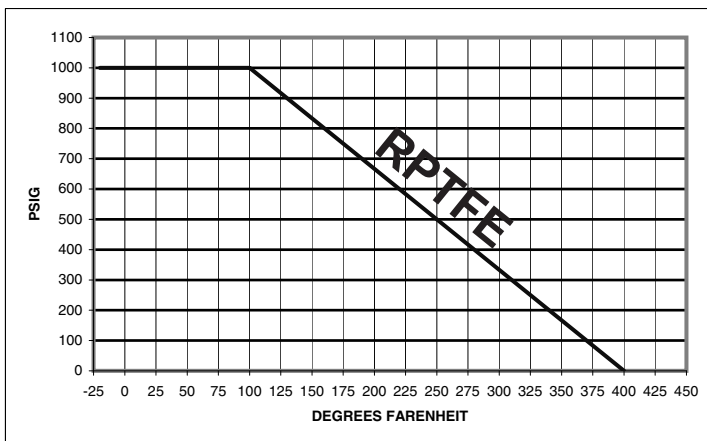

DIMENSIONS

	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
A	2.20	2.20	2.20	2.77	3.35	3.70	4.13	4.92	6.10	6.81
B	2.09	2.09	2.09	2.52	3.03	3.27	3.78	4.02	5.08	5.43
C	3.94	3.94	3.94	5.08	6.14	6.14	7.19	7.19	9.92	9.92
D	0.42	0.47	0.59	0.79	0.98	1.26	1.50	2.00	2.50	2.99

Rev. 2

The information presented on this sheet is correct at the time of publication. Milwaukee/Hammond Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access www.milwaukeevalve.com or www.hammondvalve.com

MILWAUKEE VALVE

