



Underscore®

6' Whirlpool Bath

K-1174-H2



Features

- Center drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- 72" (1829 mm) x 42" (1067 mm) x 23" (584 mm)

Material

- Acrylic

Hydrotherapy

- Eight fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Built-in 1500 W heater.
- Lighted keypad control.

Installation

- Drop-in or under-mount.

Required Accessories

K- 7271 Brass Slotted Overflow Bath Drain
K- 9698 Flexjet® Whirlpool Trim Kit

or

K- 7272 PVC Slotted Overflow Bath Drain
K- 9698 Flexjet® Whirlpool Trim Kit

Recommended Accessories

K- 1491 Bath/Whirlpool Pillow
K- 1601 Bath/Whirlpool Footstop
K- 1703 Whirlpool Remote Control
K- 592 Under-mount Installation Kit
K- 9497 2-1/2" Keypad Trim
K- 24916 Wireless Music Kit



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E162
UL 1795
CSA C22.2 No. 218.2
Greenguard UL 2818 - Gold
CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

3-27-2016 04:32

THE BOLD LOOK
OF **KOHLER**®





Underscore®



6' Whirlpool Bath

K-1174-H2

No change in measurements if connected with drain illustrated. (K-7272)

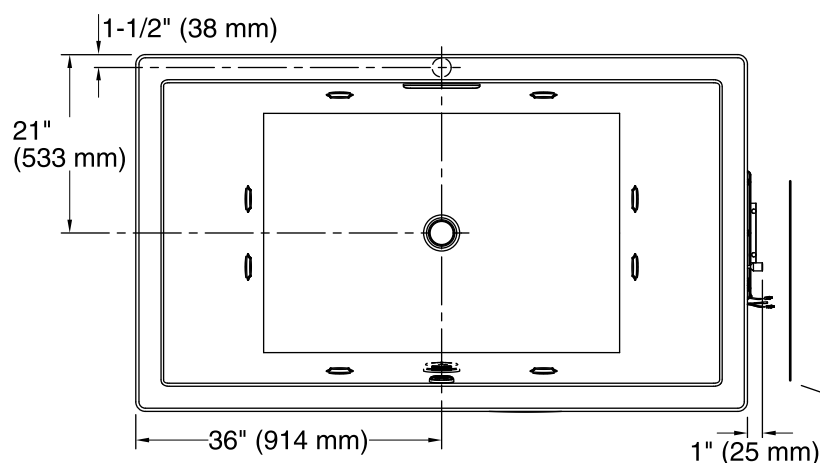

Pump/Control Access
34" (864 mm) W x 15" (381 mm) H Min

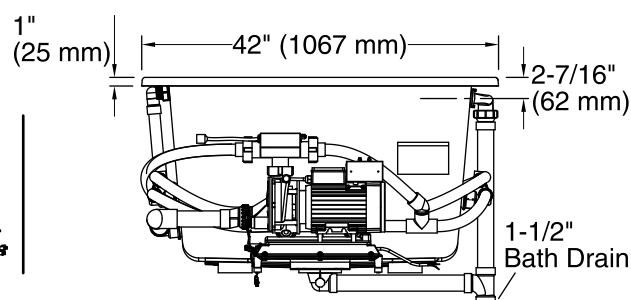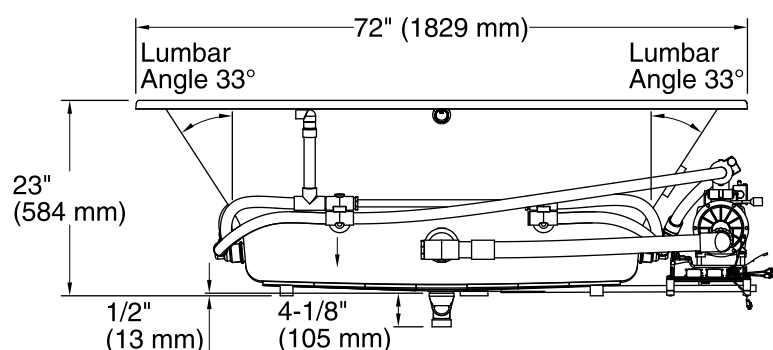

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in, Under-mount

Drain location: Center

Basin area, bottom: 45-3/4" x 32" (1162 mm x 813 mm)

Basin area, top: 66" x 36" (1676 mm x 914 mm)

Weight: 135 lbs (61.2 kg)

Minimum floor load: 63 lbs/ft² (307.6 kg/m²)

Water depth: 19" (483 mm)

Water capacity: 139 gal (526.2 L)

Cutout: Drop-in, 70-1/2" x 40-1/2" (1791 mm x 1029 mm)

Electrical component rating: Pump: 240 V, 11 A, 50/60 Hz, 1500 W

Minimum flat for door: 2-9/16" (65 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.